



Type	
Project	
Notes	


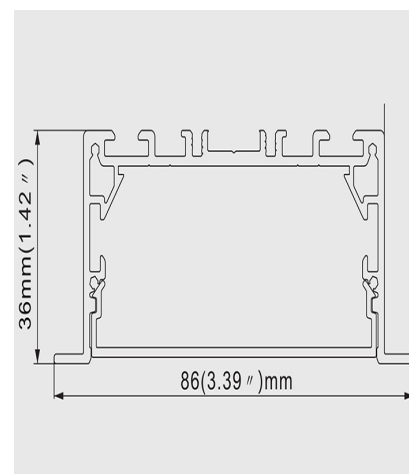


Linear Luminaire - R8636

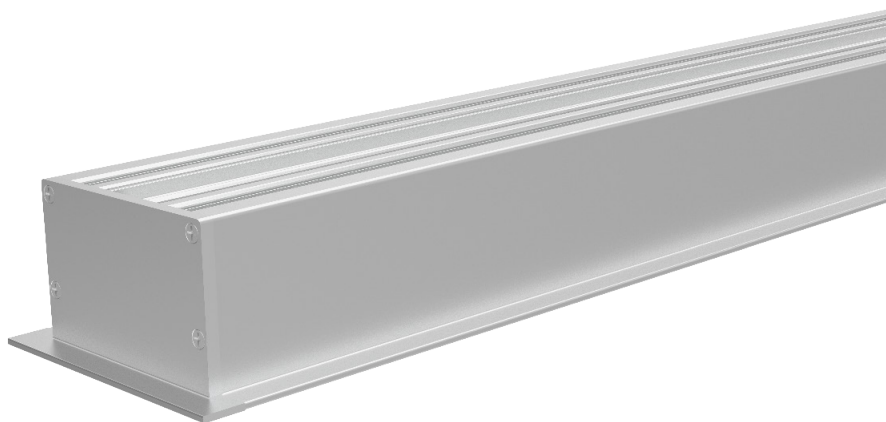


PRODUCT SPECIFICATIONS

Model	R8636
Length	1200mm or 2500mm
Lumen Output	115 lm/W or 100 lm/W
CRI	80 or 90
Voltage	100 - 277V AC 347V AC
Colour Temperature	3000k 3500k 4000k 5000k RGBW
Installation	Recessed
Beam Angle	90 (PDM) or 65 (UGR < 19)
Certification	cETLus, CE, RoHS
Warranty	5 years



PDM Cover



UGR<19 Cover



ORDER FORM

R8636					R					
1	2	3	4	5	6	7	8	9	OPTIONS	

1. FAMILY	2. SIZE	3. OUTPUT LEVEL	CRI*	4. VOLTAGE
R8636	12 1200mm 25 2500mm	A 690 lm @ 6 W / ft B 1150 lm @ 10 W / ft C 600 lm @ 6 W / ft D 1000 lm @ 10 W / ft	80 80 90 90	27 100 - 277V AC 34 347V AC

*Lumen output and CRI have restricted corresponding values


5. CCT	6. INSTALLATION	7. COLOUR	8. DIMMING	9. LENS
30 3000K 35 3500K 40 4000K 50 5000K 60 RGBW	R Recessed	1 Silver 2 Black 3 White	1D No Dimming 2D 0-10V Dimming 3D TRIAC Dimming 4D DMX 5D Dali 6D Lutron Hi-Lume	90 PDM 65 UGR<19

OPTIONS	CONNECTORS	MOUNTING
	C1 R-8636-90L C2 R-8636-90W C3 R-8636-90N C4 R-8636-90T C5 R-8636-90X C6 R-180	M1 R8636-BI M2 L-SM M3 R-BI

OPTIONAL ACCESSORIES


CONNECTORS

- C1** R-8636-90L
- C2** R-8636-90W
- C3** R-8636-90N
- C4** R-8636-90T
- C5** R-8636-90X
- C6** R-180

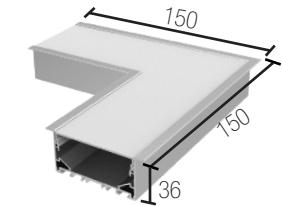


(L*W*H) 150*150*36 mm

C1

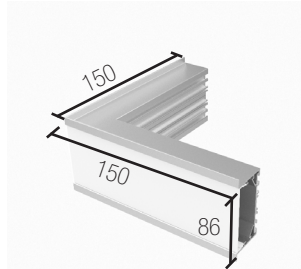


(L*W*H) 150*150*86 mm

C2




(L*W*H) 150*150*86 mm

C3

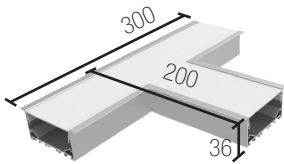


(L*W*H) 300*300*36 mm

C4

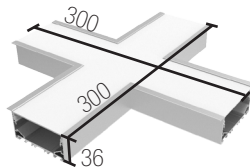

(L*W*H) 300*300*36 mm

C5

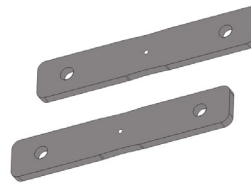


Connection bracket


C6

MOUNTING

- M1** R8636-BI
- M2** L-SM
- M3** R-BI



Recess mounting bracket M1



Mounting screws

M2



Spring mounting bracket M3

M3