

Type

Project

Notes



ADL-SPL-502

24V LED ALUMINUM SPOT LIGHT

5W COB LED (3000K, 4000K, 5000K)

Sunken light source for reduced glare

Weather resistant hard anodized finish


U-shaped bracket and optional spike.

5 YEARS
LIMITED WARRANTY
INCLUDED

IP67
NATEC & TESTED



TECHNICAL DRAWING

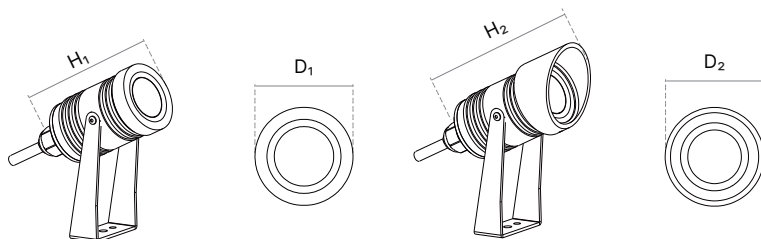

ADL-SPL-502A: H₁ 95 x D₁ Ø47

ADL-SPL-502B: H₂ 121 x D₂ Ø52

Units in Metric

PRODUCT SPECIFICATIONS

Summary	ADL-SPL-502A	ADL-SPL-502B
Dimensions	95 x Ø47	121 x Ø52
Power Consumption	5 W	5 W
Lumen Output	550 lm	550 lm
Input Voltage	24V DC	24V DC
Colour Temperature	3000K, 4000K, 5000K	3000K, 4000K, 5000K
Beam Angle	24°	24°
CRI	Ra80	Ra80
IP Rating	IP67	IP67
Warranty	5 Years	5 Years

ORDER FORM

1	2	3	4	5	6	7	8
1. FAMILY	2. SIZE	3. WATTAGE	4. VOLTAGE	5. CCT	6. CRI		
ADL-SPL-502	A 95 x Ø47 B 121 x Ø52	5 5W	A 24V DC	30 3000K 40 4000K	50 5000K	80 Ra80	
7. LENSE	8. ACCESSORIES						
LN Linear SFT Soft	HNC Honeycomb	JB2 One way Junction Box JB3 Two way Junction Box	SPK Spike				



advantlighting.ca
(604) 207 9879

© Advant Lighting, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

#105-8288 North Fraser Way,
Burnaby, BC V3N 0E9

Type

Project

Notes



ADVANT
LIGHTING

Optional Accessories



Spike for soft ground mounting

160 x Ø38




Anti-glare lens

Ø32 x 3

Linear glass lens

Soften glass lens

Honeycomb louver



IP68 junction box

For single fixture installation



IP68 junction box

For continuous fixture installation

