

Type

Project

Notes



ADVANT LIGHTING



AP-FR4G

Round Wall Wash Trim

Housing-free light engine install quickly.

Fixed tilted angle design.

Ease of installation, fast-mount features.



*Ra80 is only with 2700K and 3000K



IP20

5 YEARS LIMITED WARRANTY INCLUDED

TECHNICAL DRAWING

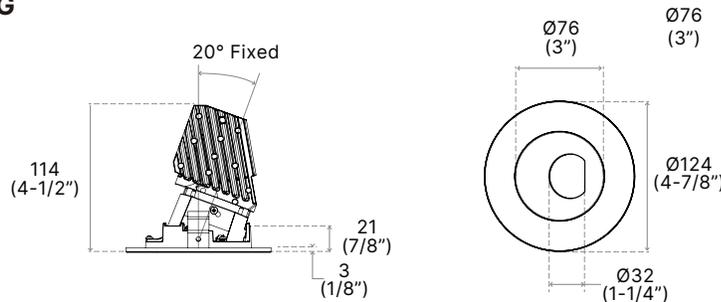

Units in Metric

PRODUCT SPECIFICATIONS

Summary	AP-FR-4G-10	AP-FR-4G-15
Dimensions	Ø124mm x 114mm	Ø124mm x 114mm
Power Consumption	10 W	15 W
Lumen Output	516 lm	672 lm
Input Voltage	120-277V AC	120-277V AC
Colour Temperature	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K, WD
Finish	Gold, Chrome, White, Brushed Nickel, Satin Nickel, Black	Gold, Chrome, White, Brushed Nickel, Satin Nickel, Black
CRI	*Ra80, Ra90	*Ra80, Ra90
Beam Angle	65° (Flood)	65° (Flood)
Warranty	5 Years	5 Years

ORDER FORM

1	2	3	4	5	6	7	8	9			
1. FAMILY	2. SIZE	3. WATTAGE		4. VOLTAGE	5. CCT						
AP-FR	4G Ø124 x 114	10	10W	A	120-277V AC	27	2700K	35	3500K	WD	Warm Dimming (15W Only)
		15	15W			30	3000K	40	4000K		
6. DIMMING	7. CRI	8. BEAM ANGLE		9. FINISH							
DM	0-10V Dimming	80	*Ra80	65	65°	CH	Chrome	SN	Satin Nickel	WH	White
TRI	TRIAC Dimming	90	Ra90			AL	Aluminum	BN	Brushed Nickel	BK	Black

Type _____

Project _____

Notes _____




OPTIONS & ACCESSORIES

MOUNTING PLATE


Ideal for unfinished basements and other renovation projects.
Choice of Square or Round for 3.5" Remodel housings.
Adjustable mounting bars included.



CODE	DESCRIPTION	HOLE DIAMETER	DIMENSIONS
P4RN	Without Mounting Bars	Ø108 (4-1/4")	165 x 337 (6-1/2" x 13-1/4")
P4RNW	With Mounting Bars	Ø109 (4-5/16")	388 x 254 ~ 622 (15-5/16" x 10" ~ 24-1/2")



P4RN

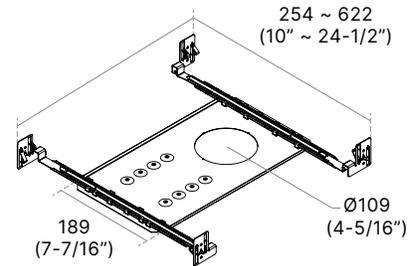

P4RNW

LENSES

Choice of replacement lenses for on-site modification of light diffusion.
Shower Light trims available only with Frosted lens.
*Wall Wash trims available only with Frosted/Frosted lens.



Type

Project

Notes





HOUSINGS



REMODEL IC

REUR	4	V	
-------------	----------	----------	--

1. MODEL	2. SERIES	3. VOLTAGE	4. DIMMING
REUR Remodel Housing	4 4"	V 120-277V AC	E1 ELV 10W D1 0-10V 10W E2 ELV 15W D2 0-10V 15W EB2 ELV (+VALUE) 15W ND Non-dimmable 15W

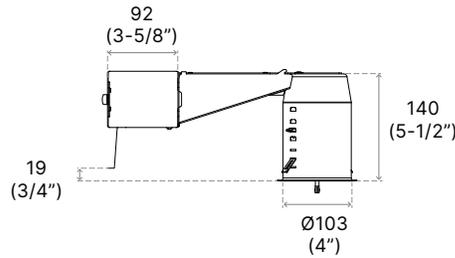

NEW CONSTRUCTION IC





NWUR	4	V	
-------------	----------	----------	--

1. MODEL	2. SERIES	3. VOLTAGE	4. DIMMING
NWUR New Construction Housing	4 4"	V 120-277V AC	E1 ELV 10W D1 0-10V 10W E2 ELV 15W D2 0-10V 15W EB2 ELV (+VALUE) 15W ND Non-dimmable 15W

5. OPTION

EM Emergency Back up

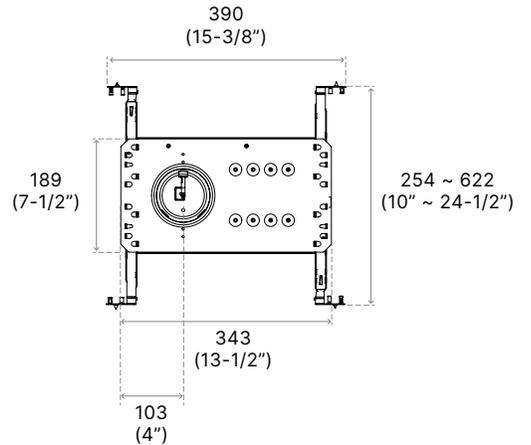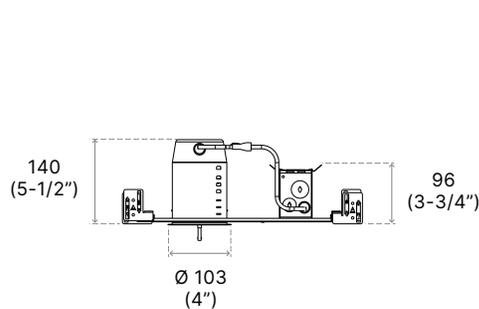

Type

Project

Notes



HOUSINGS



Classic New Construction IC

ISUR	4	V	
1. MODEL	2. SERIES	3. VOLTAGE	4. DIMMING
ISUR IC and Air Tight Housing	4 4"	V 120-277V AC	E1 ELV 10W D1 0-10V 10W E2 ELV 15W D2 0-10V 15W EB2 ELV (+VALUE) 15W ND Non-dimmable 15W

