

Type

Project

Notes



ADVANT
LIGHTING

AVL-L4266

Linear Luminaire



Pendant



Recessed




Surface



Wall



UGR<19
COVER




PDM Cover
95°



TECHNICAL DRAWING

W2 26mm x H2 19mm



AVL-L4266-12: W 42mm x H 66mm x L 1200mm

(W 1.57" x H 2.64" x L 47.24")

AVL-L4266-25: W 42mm x H 66mm x L 2500mm

(W 1.57" x H 2.64" x L 98.43")

Units in Metric

PRODUCT SPECIFICATIONS

Summary	AVL-L4266-12	AVL-L4266-25
Dimensions	W 42 mm x H 66mm x L 1200mm	W 42 mm x H 66mm x L 2500mm
Power Consumption	6W or 10W	6W or 10W
Lumen Output	100 lm/W or 90 lm/W	110 lm/W or 90 lm/W
Input Voltage	100-277V AC, 347V AC	100-277V AC, 347V AC
Colour Temperature	3000K, 3500K, 4000K, 5000K, RGBW	3000K, 3500K, 4000K, 5000K, RGBW
Beam Angle	95° (PDM) or 65° (UGR<19)	95° (PDM) or 65° (UGR<19)
Finish	Silver, Black, White	Silver, Black, White
CRI	Ra80, Ra90	Ra80, Ra90
Warranty	5 Years	5 Years

ORDER Form

Next Page



advantlighting.ca
(604) 207 9879

© Advant Lighting, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

#105-8288 North Fraser Way,
Burnaby, BC V3N 0E9

Type

Project

Notes


ADVANT
LIGHTING

ORDER FORM



1 2 3 4 5 6 7 8 9 OPTIONS

1. FAMILY

2. SIZE

3. OUTPUT LEVEL

CRI

4. VOLTAGE

5. CCT

AVL-L4266

12 1200mm
25 2500mm

A	600 lm @ 6 W/ft	Ra80
B	1000 lm @ 10W/ft	Ra80
C	540 lm @ 6W/ft	Ra90
D	900 lm @ 10/ft	Ra90

*Lumen output and CRI have restricted corresponding values

A 100-277V AC
B 347V AC

30	3000K	RGBW	RGBW
35	3500K		
40	4000K		
50	5000K		

6. INSTALLATION

7. FINISH

8. DIMMING

9. LENS

P Pendant
W Wall Mount
S Surfac Mount

SV Silver
BK Black
WH White

NN	None	DMX	DMX
DM	0-10V	DL	DALI
TRI	TRIAC	LT	Lutron Hi-Lume

90 PDM
65 UGR<19

OPTIONS

CONNECTORS

MOUNTING

ACCOUSTIC


C1	L-4067D-90L	C4	L-4067D-90T
C2	L-4067D-90W	C5	L-4067D-90X
C3	L-4067D-90N	C6	L-45-180

M1	L-PTB-S	M4	L-CM
M2	L-PT-S	M5	L-PTB-NPF-S
M3	L-WM	M6	L-PTB-PF-S


A1 SOUND ABSORPTION




C1: 150 X 150 X 67 mm



C2: 150 X 150 X 49 mm



C3: 150 X 150 X 67 mm

M1:
Pendant Cable
With CanopyM2:
Pendant CableM3:
Wall Mount Bracket

C4: 300 X 200 X 67mm



C5: 300 X 300 X 67 mm



C6: Connectors

M4:
Ceiling Mount BracketM5:
Suspension Cable
without Power FeedM6:
Suspension Cable
with Power Feed
advantlighting.ca
(604) 207 9879

© Advant Lighting, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

#105-8288 North Fraser Way,
Burnaby, BC V3N 0E9

Type

Project

Notes



ADVANT
LIGHTING

Sound Absorption Features



Sound Absorption
Acoustic Standard NRC0.75




Damp-proof rated
Anti-moisture



Eco-friendly
Made out of polyester fibre


Diagram

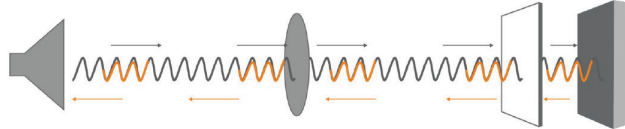

Acoustic Source


Speaker

Good Sound Absorption

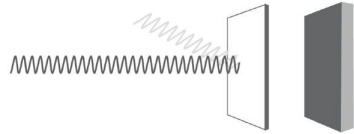

Poor quality sound absorption
material reflects the sound

Colour Cards

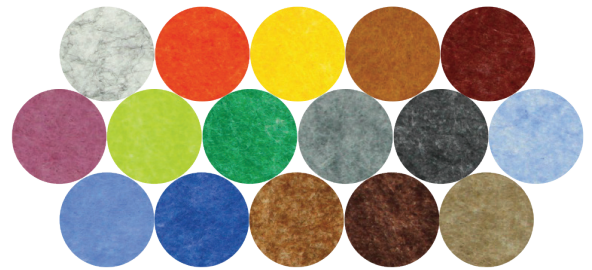

advantlighting.ca
(604) 207 9879

© Advant Lighting, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

#105-8288 North Fraser Way,
Burnaby, BC V3N 0E9