

Type

Project

Notes



AVL-LR100

LED LUMINAIRE LIGHT

Durable aluminum shell with quality finish
 Advanced PMMA light guide for efficient lighting
 Easy installation with straight connectors
 Integrated LED driver for sleek design

5 YEARS
 LIMITED WARRANTY
 INCLUDED




IP20
RAISED & TESTED

IESNA
 LM-79

IESNA
 LM-80

TECHNICAL DRAWING

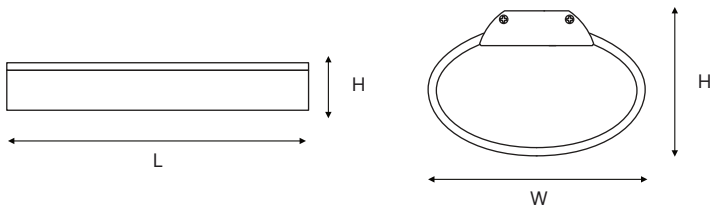

AVL-LR100: W 4" x L 48" x H 2.63"

PRODUCT SPECIFICATIONS

Summary	AVL-LR100
Dimensions	W 4" x L 48" x H 2.63"
Lumen Output	3,500 lm
Efficacy	100 lm/W
Power Consumption	35 W
Input Voltage	120-277V AC
CCT	3000K, 3500K, 4000K, 5000K
CRI	Ra80, Ra90
IP rating	IP20
Finish	Silver

ORDER FORM

AVL-LR100													
1		2		3		4		5		6		7	
2. WATTAGE		3. VOLTAGE		4. CCT		5. CRI		6. FINISH		7. DIMMING			
35	35 W	A	120-277V AC	30	3000K	R80	Ra80	SV	Silver	TRI	TRIAC		
	35			3500K	R90	Ra90	DM			0-10V			
	40			4000K									
	50			5000K									