


Type	
Project	
Notes	





Linear Luminaire- L5570

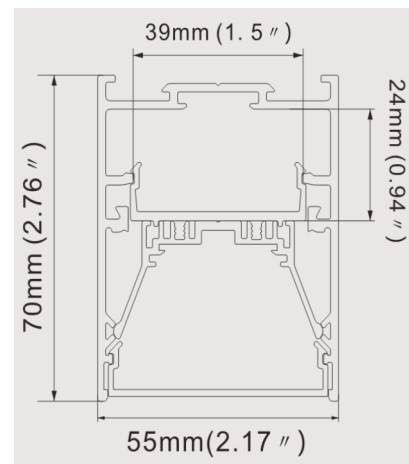

PRODUCT SPECIFICATIONS

Model	L5570
Length	1200mm or 2500mm
Lumen Output	110 lm/W or 97 lm/W
CRI	80 or 90
Voltage	100 - 277V AC 347V AC
Colour Temperature	3000k 3500k 4000k 5000k RGBW Tuneable White (3000K-5000K)
Installation	Pendant Recessed Surface mounted Wall mounted
Beam Angle	95 (PDM) or 65 (UGR <19) or Louver
Certification	cETLus, CE, RoHS
Warranty	5 years

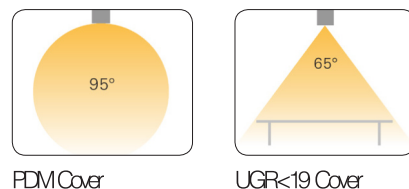

ORDER FORM

L5570										
1	2	3	4	5	6	7	8	9		OPTIONS

1. FAMILY	2. SIZE	3. OUTPUT LEVEL	CRI*	4. VOLTAGE
L5570	12 1200mm 25 2500mm	A 660lm @ 6W / ft B 1100 lm @ 10W / ft C 582lm @ 6W / ft D 970lm @ 10W / ft	80 80 90 90	27 100 - 277VAC 34 347VAC

*Lumen output and CRI have restricted corresponding values

5. CCT	6. INSTALLATION	7. COLOUR	8. DIMMING	9. LENS
30 3000K 35 3500K 40 4000K 50 5000K RGBW RGBW TW Tuneable White (3000K-5000K)	P Pendant R Recessed S Surface mounted W Wall mounted	1 Silver 2 Black 3 White	1D No Dimming 2D 0-10V Dimming 3D TRIAC Dimming 4D DMX 5D Dali 6D Dali2 7D Lutron Hi-Lume	95 PDM 65 UGR < 19 LV Louver

OPTIONS	MOUNTING	CONNECTORS
	M1 L-PTB M2 L-PT M3 L5570-BI M4 L457-WM M5 L-PTB-NPF M6 L-PTB-PF	C1 L-5570-90L C2 L-5570-90W C3 L-5570-90N C4 L-5570-90T C5 L-5570-90X C6 L-45-180

OPTIONAL ACCESSORIES

MOUNTING

- M1** L-PTB
- M2** L-PT
- M3** L5570-BI
- M4** L457-WM
- M5** L-PTB-NPF
- M6** L-PTB-PF



CONNECTORS

- C1** L-5570-90L
- C2** L-5570-90W
- C3** L-5570-90N
- C4** L-5570-90T
- C5** L-5570-90X
- C6** L-45-180

