


Type

Project

Notes



ADVANT
LIGHTING

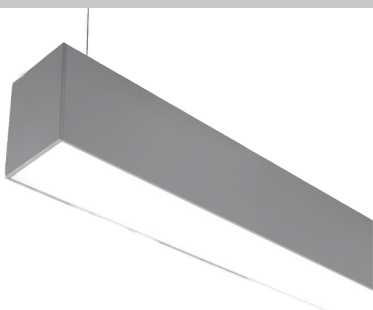

AVL-LP8562

Linear Luminaire

Sleek & customizable lighting design

Versatile & adjustable illumination options

Single row linear fixture

5 YEARS
LIMITED WARRANTY
INCLUDED


IP20
RATED & TESTED



IESNA
LM-79

IESNA
LM-80

TECHNICAL DRAWING

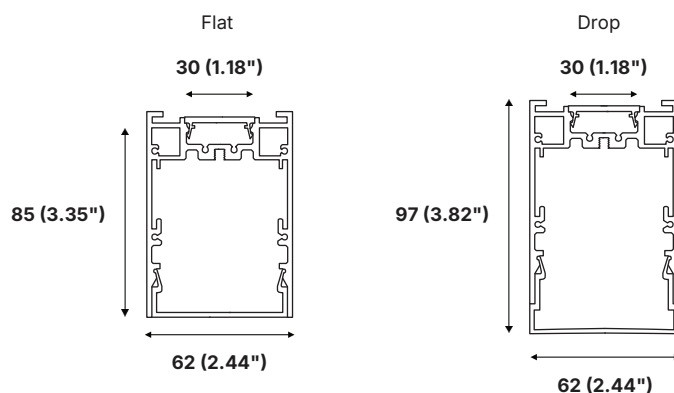

PRODUCT SPECIFICATIONS

Summary	AVL-LP8562-STD	AVL-LP8562-HI
Length	2 ft, 4 ft, 6 ft	2 ft, 4 ft, 6 ft
Lumen Output	82 lm/W	78 lm/W
Power Consumption	2 × 20 W/m	2 × 30 W/m
Input Voltage	120-277V AC	120-277V AC
CCT	CCT Selectable (30K, 35K, 40K, 50K), RGBW	CCT Selectable (30K, 35K, 40K, 50K), RGBW
CRI	Ra80	Ra80
IP rating	IP20	IP20
Beam Angle	90°	90°
Finish	Black, White, Silver	Black, White, Silver
Working Temperature	-20° ~ +40°C	-20° ~ +40°C
Warranty	5 Years	5 Years



advantlighting.ca
(604) 207 9879

© Advant Lighting, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

#105-8288 North Fraser Way,
Burnaby, BC V3N 0E9

Type

Project

Notes




ADVANT
LIGHTING

ORDER FORM


AVL		LP8562																											
1		2		3		4		5		6		7		8		9		10		11		12		13					
1. FAMILY		2. MODEL				3. LENGTH				4. OUTPUT				5. VOLTAGE				6. CRI				7. CCT							
AVL		LP8562		85 × 62 mm		2		2' (600mm)		STD		20 W/m		A		120-277V AC		R80		Ra80		30		3000K		40		4000K	
						4		4' (1200mm)		HI		30 W/m										35		3500K		50		5000K	
						6		6' (1800mm)														RGBW		RGBW		CCT		CCT Selectable (30-35-40-50)	
8. FINISH		9. DIMMING				10. BEAM				11. SENSOR				12. LENS				13. INSTALLATION											
BK	Black	1D	None	3D	DMX	90D	90°	MS	Motion Sensor	FL	Flat	P	Pendant																
WH	White	2D	0-10V	4D	Dali			EB	Emergency Backup	DR	Drop	W	Wall																
SV	Silver																												

MOUNT & DISTRIBUTION

Pendant Mount



Wall Mount




LENS




Flat

Drop

DISTRIBUTION CHART



Flat



Drop

