






### **TECHNICAL DRAWING**



## PRODUCT SPECIFICATIONS


Summary	AVL-LP9634-LOW	AVL-LP9634-STD	AVL-LP9634-HI
Length	2 ft, 4 ft , 6 ft	2 ft, 4 ft , 6 ft	2 ft, 4 ft , 6 ft
Lumen Output	67 lm/W	62 lm/W	57 lm/W
Power Consumption	24 W	48 W	72 W
Input Voltage	120-277V AC	120-277V AC	120-277V AC
CCT	30K, 35K, 40K, 50K	30K, 35K, 40K, 50K	30K, 35K, 40K, 50K
CRI	Ra80, Ra90	Ra80, Ra90	Ra80, Ra90
IP rating	IP20	IP20	IP20
Beam Angle	95°, Wall Washer	95°, Wall Washer	95°, Wall Washer
Finish	Black, White, Silver	Black, White, Silver	Black, White, Silver
Working Temperature	-20° ~ +40°C	-20° ~ +40°C	-20° ~ +40°C
Warranty	5 Years	5 Years	5 Years




## **ORDER FORM**

AVL	LP9634																
1	2	3		4	5		6	7		8	9		10	11		12	13
1. FAMILY	2. MOE	EL		3. LI	ENGTH	4. O	JTPUT	5.	VOLTAGE		6. CR	I	7. C	СТ			
AVL	LP963	<b>4</b> 96 × 34	mm	4	2' (600mm) 4' (1200mm) 6' (1800mm)		24 V 48 V 72 W	1	120-277	V AC	R80 R90	Ra80 Ra90	30 35	3000K 3500K	40 50		
8. FINISH	9. 🗅	IMMING			10. BE	EAM	11. SE	NSOR		12. LE	ENS		13.	INSTALLATI	ON		
BK Black WH White SV Silver	2D	None 0-10V	3D 4D	DMX Dali	95D	95°	MS EB	Motion Se Emergenc Backup		DID AS BL	Direct/li Asymm Blank S	etrical	Pr Ps	Pendant - round Pendant- square		Surface Recessed	

## **MOUNT & DISTRIBUTION**





LENS





Canopy

# **DISTRIBUTION CHART**













## **CUSTOM INSTALLATION**

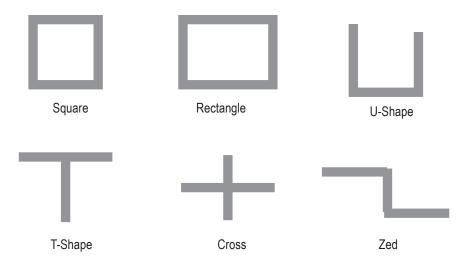

### WALL WASHER DETAIL



### LP9634-HI-AS

20W, 4000K, direct light only

Quantity: 1pc

Washing dimension:  $2 \times 2m$ 

Room Values

Room dimensions  $7 \times 7 \times 2.8 \text{m}$ Reflection factor  $0.7 \times 0.5 \times 0.2$ Maintenance factor 0.8



#### LP9634-HI-AS

20W, 4000K, direct light only

Quantity: 2pcs

Washing dimension:  $3.7 \times 2.4 \mathrm{m}$ 

Distance between fixtures: 1.3 - 1.5m

Room Values

Room dimensions  $7 \times 7 \times 2.8 \text{m}$ 

Reflection factor 0.7š 0.5š 0.2

Maintenance factor 0.8