

Type

Project

Notes



ADVANT
LIGHTING



AP-AV2SFR

Ultra-Thin Profile Square Regressed Trim

Housing-free light engine install quickly.

The perfect option for a flush finish with ceiling materials.


Ease of installation, fast-mount features.



IP20
RATED & TESTED

5 YEARS
LIMITED WARRANTY
INCLUDED

TECHNICAL DRAWING

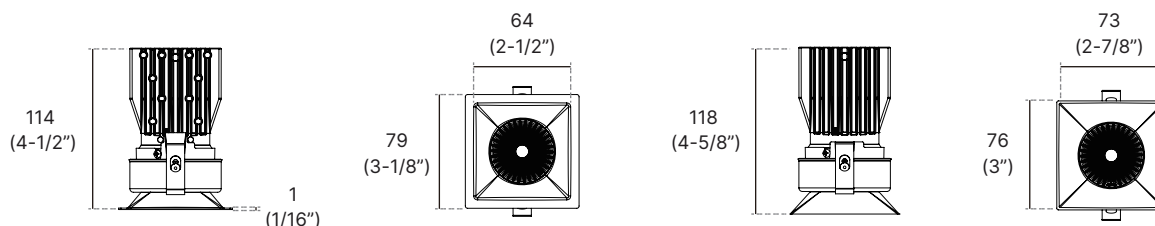

TR - Flangeless Trim

Units in Metric

PRODUCT SPECIFICATIONS

Summary	AP-AV2SFR-AR	AP-AV2SFR-TR
Dimensions	79mm x 79mm x 114mm	76mm x 76mm x 118mm\
Power Consumption	14 W	14 W
Lumen Output	1000 lm	1000 lm
Input Voltage	120-277V AC	120-277V AC
Colour Temperature	2700K, 3000K, 3500K, 4000K	2700K, 3000K, 3500K, 4000K
Finish	Gold, Chrome, Brushed Chrome, Matte White, Brushed Nickel, Satin Nickel, Matte Black, Aluminum	
CRI	Ra90	Ra90
Beam Angle	25° (Narrow Flood), 44° (Flood)	25° (Narrow Flood), 44° (Flood)
Warranty	5 Years	5 Years

ORDER FORM

1	2	3	4	5	6	7	8
1. FAMILY	2. SIZE	3. WATTAGE	4. VOLTAGE	5. CCT	6. BEAM ANGLE		
AP-AV2SFR	AR	79 x 79 x 114	14 14W	A 120-277V AC	27 2700K	35 3500K	25 25°
	TR	76 x 76 x 114			30 3000K	40 4000K	44 44°
7. DIMMING	8. FINISH						
DM 0-10V Dimming	CH Chrome	BC Brushed Chrome	WH White	GD Gold			
TRI TRIAC Dimming	AL Aluminum	BN Brushed Nickel	BK Black	SN Satin Nickel			



advantlighting.ca
(604) 207 9879

© Advant Lighting, LTD. All rights reserved. We reserve the right to change design, materials and finish in any way that will not alter installed appearance or reduce function and performance.

#105-8288 North Fraser Way,
Burnaby, BC V3N 0E9

Type

Project

Notes



ADVANT
LIGHTING

OPTIONS & ACCESSORIES

MOUNTING PLATE

Ideal for unfinished basements and other renovation projects
Choice of Square or Round for 2.5" Remodel housings
Adjustable mounting bars included.



PA2NW

2.5" Square, 2.5" Round

LENSES

Choice of replacement lenses for on-site modification of light diffusion.
Shower Light trims available only with Frosted lens.
*Wall Wash trims available only with Frosted/Frosted lens.



CL Clear



FR Frosted



WW Wall Wash




LN Linear



SL Solite



PR Prismatic



HC Honeycomb



Type

Project

Notes



ADVANT
LIGHTING


HOUSINGS

IC AIR TIGHT HOUSING



ICAT0S2-V14


ICAT		0		S		2		V		14	
1. MODEL		2. HOUSING		3. TYPE		4. SERIES		5. DRIVER		6. PERFORMANCE	
ICAT	Insulated Housing Air Tight	0	254 x 254 (10" x 10")	S	Square	2	2-1/2"	V	120-277V AC	14	14 W 1300 lm



ICAT0R2-V14

ICAT		0		R		2		V		14	
1. MODEL		2. HOUSING		3. TYPE		4. SERIES		5. DRIVER		6. PERFORMANCE	
ICAT	Insulated Housing Air Tight	0	254 x 254 (10" x 10")	R	Round	2	2-1/2"	V	120-277V AC	14	14 W 1300 lm

REMODEL HOUSING



REA2-V1

REa		2		V		1	
1. MODEL		2. SERIES		3. DRIVER		4. PERFORMANCE	
REa	Remodel Housing	2	2-1/2"	V	120-277V AC	1	1300 lm (1000 lm with 2-1/2")

