

Type

Project

Notes



### AP-AV3RAF

#### Ultra-Thin Profile Round Adjustable Trim

Housing-free light engine install quickly.

Innovative tilt/swivel design.


Ease of installation, fast-mount features.



IP20  
RATED & TESTED

5 YEARS  
LIMITED WARRANTY  
INCLUDED

### TECHNICAL DRAWING

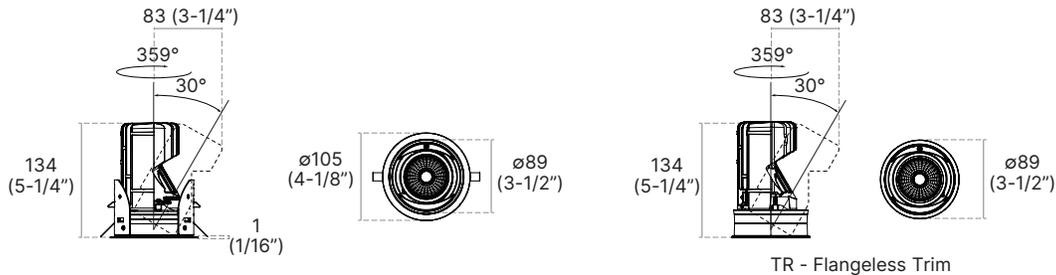

TR - Flangeless Trim

Units in Metric

### PRODUCT SPECIFICATIONS

Summary	AP-AV3RAF-AR	AP-AV3RAF-TR
<b>Dimensions</b>	Ø 105mm x 134mm	Ø 89mm x 134mm
<b>Power Consumption</b>	14 W, 23 W	14 W, 23 W
<b>Lumen Output</b>	1300-1900 lm	1300-1900 lm
<b>Input Voltage</b>	120-277V AC	120-277V AC
<b>Colour Temperature</b>	2700K, 3000K, 3500K, 4000K, CCT, WD	2700K, 3000K, 3500K, 4000K, CCT, DM
<b>Finish</b>	Gold, Chrome, Brushed Chrome, Matte White, Brushed Nickel	Satin Nickel, Matte Black, Aluminum
<b>CRI</b>	Ra90	Ra90
<b>Beam Angle</b>	15° (Spt), 30° (Narrow Flood), 42° (Flood)	15° (Spt), 30° (Narrow Flood), 42° (Flood)
<b>Warranty</b>	5 Years	5 Years

### ORDER FORM

1	2	3	4	5	6	7	8
1. FAMILY	2. SIZE	3. WATTAGE	4. VOLTAGE	5. CCT			
<b>AP-AV3RAF</b>	<b>AR</b> Ø105 x 134 <b>TR</b> Ø89 x 134	<b>14</b> 14W <b>23</b> 23W	<b>A</b> 120-277V AC	<b>27</b> 2700K <b>30</b> 3000K	<b>35</b> 3500K <b>40</b> 4000K	<b>CCT</b> Colour Tuning <b>WD</b> Warm Dimming	
6. BEAM ANGLE	7. DIMMING	8. FINISH					
<b>15</b> 15° <b>30</b> 30°	<b>42</b> 42° <b>DM</b> 0-10V Dimming <b>TRI</b> TRIAC Dimming	<b>CH</b> Chrome <b>AL</b> Aluminum <b>BC</b> Brushed Chrome <b>BN</b> Brushed Nickel <b>WH</b> White <b>BK</b> Black <b>GD</b> Gold <b>SN</b> Satin Nickel					

Type

Project

Notes



ADVANT  
LIGHTING

## OPTIONS & ACCESSORIES

### MOUNTING PLATE

Ideal for unfinished basements and other renovation projects.  
Choice of Square or Round for 3.5" Remodel housings.  
Adjustable mounting bars included.



**PA3NW** 3.5" Square, 3.5" Round

### EMERGENCY DRIVER

Battery life: 120 minutes  
Available only for 3.5" and 4" New Construction housings.  
Housing Option: **-EM** suffix



**EM**

### STEP-DOWN TRANSFORMER

Available only for 3.5" and 4" Remodel and New Construction housings.



**STD-60M** 3.5" Square, 3.5" Round

### LENSES

Choice of replacement lenses for on-site modification of light diffusion.  
Shower Light trims available only with Frosted lens.  
\*Wall Wash trims available only with Frosted/Frosted lens.



**CL** Clear



**FR** Frosted



**WW** Wall Wash



**LN** Linear



**SL** Solite



**PR** Prismatic



**HC** Honeycomb



Type

Project

Notes



ADVANT LIGHTING

## HOUSINGS



### IC AIR TIGHT HOUSING - ROUND

ICAT	6	R	3	V	
1. MODEL	2. HOUSING	3. TYPE	4. SERIES	5. DRIVER	6. PERFORMANCE
<b>ICAT</b> Insulated Housing Air Tight	<b>6</b> 410 x 254 (16" x 10")	<b>R</b> Round	<b>3</b> 3-1/2"	<b>V</b> 120-277V AC	<b>14</b> 14 W 1300 lm <b>23</b> 23 W 1900 lm



### IC AIR TIGHT HOUSING - SQUARE

ICAT	6	S	3	V	
1. MODEL	2. HOUSING	3. TYPE	4. SERIES	5. DRIVER	6. PERFORMANCE
<b>ICAT</b> Insulated Housing Air Tight	<b>6</b> 410 x 254 (16" x 10")	<b>S</b> Square	<b>3</b> 3-1/2"	<b>V</b> 120-277V AC	<b>14</b> 14 W 1300 lm <b>23</b> 23 W 1900 lm



### REMODEL HOUSING

REA	3	S		
1. MODEL	2. SERIES	3. DRIVER	4. PERFORMANCE	
<b>REA</b> Remodel Housing	<b>3</b> 3-1/2"	<b>V</b> 120-277V AC	<b>1</b> 1300 lm (1000 lm with 2-1/2")	<b>2</b> 1900 lm <b>L</b> WD or CT CT: Colour Tuning WD: Warm Dimming



### NEW CONSTRUCTION HOUSING

NWA		3	V		
1. MODEL	2. TYPE	3. SERIES	4. DRIVER	5. PERFORMANCE	6. OPTIONS
<b>NWA</b> New Construction Housing	<b>S</b> Square <b>R</b> Round	<b>3</b> 3-1/2"	<b>V</b> 120-277V AC	<b>1</b> 1300 lm (1000 lm with 2-1/2") <b>2</b> 1900 lm <b>L</b> WD or CT	<b>EM</b> Emergency Driver (not available with WD and CT)



### IC INSULATED HOUSING

ISA		3	V	
1. MODEL	2. TYPE	3. SERIES	4. DRIVER	5. PERFORMANCE
<b>ISA</b> Insulated Housing	<b>S</b> Square <b>R</b> Round	<b>3</b> 3-1/2"	<b>V</b> 120-277V AC	<b>1</b> 1300 lm (1000 lm with 2-1/2") <b>2</b> 1900 lm <b>L</b> WD or CT