

Type

Project

Notes



AP-AV4SAR

Ultra-Thin Profile Square Adjustable Regressed Trim

Housing-free light engine install quickly.

Innovative tilt/swivel design.


Ease of installation, fast-mount features.



IP20
RATED & TESTED

5 YEARS
LIMITED WARRANTY
INCLUDED

TECHNICAL DRAWING

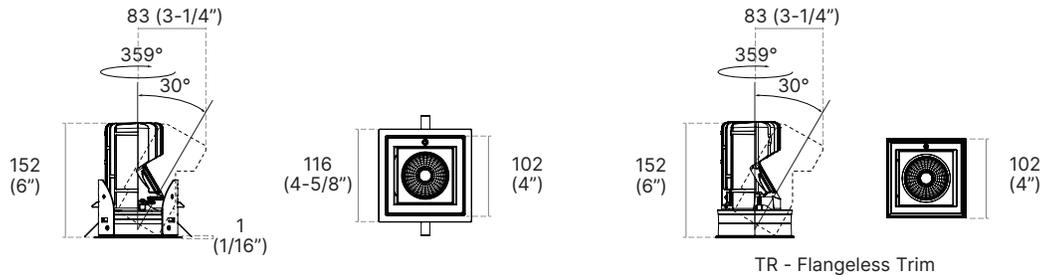

TR - Flangeless Trim

Units in Metric

PRODUCT SPECIFICATIONS

| Summary | AP-AV4SAR-AR | AP-AV4RAR-TR |
|---------------------------|--|---|
| Dimensions | 116mm x 116mm x H 152mm | 102mm x 102mm x H 152mm |
| Power Consumption | 14 W, 23 W | 14 W, 23 W |
| Lumen Output | 1300-1900 lm | 1300-1900 lm |
| Input Voltage | 120-277V AC | 120-277V AC |
| Colour Temperature | 2700K, 3000K, 3500K, 4000K, CCT, WD | 2700K, 3000K, 3500K, 4000K, CCT, DM |
| Finish | Gold, Chrome, Brushed Chrome, Matte White, Brushed Nickel, Satin Nickel, Matte Black, Aluminum | |
| CRI | Ra90 | Ra90 |
| Beam Angle | 15° (Spot), 30° (Narrow Flood), 42° (Flood) | 15° (Spot), 30° (Narrow Flood), 42° (Flood) |
| Warranty | 5 Years | 5 Years |

ORDER FORM

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|------------------|---------------------------|--------------------------|--------------------------|-----------------|------------------------|--------------------------|------------------------|
| 1. FAMILY | 2. SIZE | 3. WATTAGE | 4. VOLTAGE | 5. CCT | | | |
| AP-AV4SAR | AR 116 x 116 x 152 | 14 14W | A 120-277V AC | 27 2700K | 35 3500K | CCT Colour Tuning | WD Warm Dimming |
| | TR 102 x 102 x 152 | 23 23W | | 30 3000K | 40 4000K | | |
| 6. BEAM ANGLE | | 7. TRIM FINISH - AR only | | | 8. REFLECTOR FINISH | | |
| 15 15° | 42 42° | CH Chrome | BC Brushed Chrome | WH White | GD Gold | BK Black | WH White |
| 30 30° | | AL Aluminum | BN Brushed Nickel | BK Black | SN Satin Nickel | AL Aluminum | |

Type

Project

Notes



ADVANT
LIGHTING

OPTIONS & ACCESSORIES

MOUNTING PLATE

Ideal for unfinished basements and other renovation projects.
Choice of Square or Round for 4" Remodel housings.
Adjustable mounting bars included.



PA4NW 4" Square 4" Round

EMERGENCY DRIVER

Battery life: 120 minutes
Available only for 3.5" and 4" New Construction housings.
Housing Option: **-EM** suffix



EM

STEP-DOWN TRANSFORMER

Available only for 3.5" and 4" Remodel and New Construction housings.



STD-60M 4" Square, 4" Round

LENSES

Choice of replacement lenses for on-site modification of light diffusion.
Shower Light trims available only with Frosted lens.
*Wall Wash trims available only with Frosted/Frosted lens.



CL Clear



FR Frosted



WW Wall Wash



LN Linear



SL Solite



PR Prismatic



HC Honeycomb



Type

Project

Notes



ADVANT LIGHTING

HOUSINGS



IC AIR TIGHT HOUSING - ROUND

| ICAT | 6 | R | 4 | V | |
|---|--------------------------------|----------------|-------------|----------------------|--|
| 1. MODEL | 2. HOUSING | 3. TYPE | 4. SERIES | 5. DRIVER | 6. PERFORMANCE |
| ICAT Insulated Housing Air Tight | 6 410 x 254 (16" x 10") | R Round | 4 4" | V 120-277V AC | 14 14 W 1300 lm 23 23 W 1900 lm |



IC AIR TIGHT HOUSING - SQUARE

| ICAT | 6 | S | 4 | V | |
|---|--------------------------------|-----------------|-------------|----------------------|--|
| 1. MODEL | 2. HOUSING | 3. TYPE | 4. SERIES | 5. DRIVER | 6. PERFORMANCE |
| ICAT Insulated Housing Air Tight | 6 410 x 254 (16" x 10") | S Square | 4 4" | V 120-277V AC | 14 14 W 1300 lm 23 23 W 1900 lm |



REMODEL HOUSING

| REA | 4 | S | |
|----------------------------|-------------|----------------------|--|
| 1. MODEL | 2. SERIES | 3. DRIVER | 4. PERFORMANCE |
| REA Remodel Housing | 4 4" | V 120-277V AC | 1 1300 lm (1000 lm with 2-1/2") 2 1900 lm L WD or CT CT: Colour Tuning WD: Warm Dimming |



NEW CONSTRUCTION HOUSING

| NWA | | 4 | V | | |
|-------------------------------------|-----------------------------------|-------------|----------------------|---|---|
| 1. MODEL | 2. TYPE | 3. SERIES | 4. DRIVER | 5. PERFORMANCE | 6. OPTIONS |
| NWA New Construction Housing | S Square R Round | 4 4" | V 120-277V AC | 1 1300 lm (1000 lm with 2-1/2") 2 1900 lm L WD or CT | EM Emergency Driver (not available with WD and CT) |



IC INSULATED HOUSING

| ISA | | 4 | V | |
|------------------------------|-----------------------------------|-------------|----------------------|---|
| 1. MODEL | 2. TYPE | 3. SERIES | 4. DRIVER | 5. PERFORMANCE |
| ISA Insulated Housing | S Square R Round | 4 4" | V 120-277V AC | 1 1300 lm (1000 lm with 2-1/2") 2 1900 lm L WD or CT |