


AP-KL4

INDOOR

LED Downlight

Dry/ Damp location

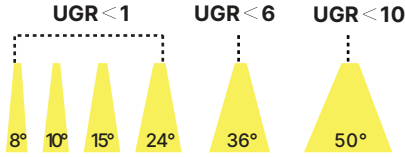

5 YEARS LIMITED WARRANTY INCLUDED | IP20 RATED & TESTED | IESNA LM-79 | IESNA LM-80 | DIMMABLE

- Low-Glare Performance (UGR Rated):** Engineered for visual comfort, delivering **Low UGR $\leq 1 - 16$, glare-free illumination** across narrow to wide beam options.
- Superior Light Quality:** Equipped with CREE COB LEDs, CRI 90+, SDCM <3, and tunable CCT from 2700K–6500K, ensuring accurate color rendering and uniform illumination.
- Flexible Performance:** Power configurable from 20W to 35W, delivering up to 2940 lumens, with dimming options including non-dim, 0–10V, TRIAC, and DALI control.
- Customizable Design:** Offered in black, white, champagne gold, or chrome finishes, with optical accessories like honeycomb, diffusion, and linear spread filters.
- Durable & Reliable:** Constructed from ADC12 aluminum, IP20/IP54 rated, -20°C to 40°C operating range, CE / UKCA / RoHS / cETLus/ Reach compliant, and backed by a 5-year warranty.

Ordering Information

Date: _____
 Project: _____
 Type: _____

Quantity: _____
 Note: _____

Order Form Clear Form

Luminaire | Example: AP-KL-4-20-A-27-R90-15D-DM-WH-RD-WH-HC

Series	Model	Length	Wattage	Voltage	CCT	CRI	Beam Angle	Dimming	Finish	Reflector	Reflector Color	Accessories	Trim
AP	KL	4 Ø95	20 20W	A 120-277V AC	27 2700K	R90 >Ra90	10D 10° _{UGR1}	— None	WH White	RD Round	WH White	HC Honeycomb	ST Standard
			25 25W		30 3000K		15D 15° _{UGR1}	DM 0-10V	BK Black		BK Black	LS Linear Spread Filter	TL Trimless
			30 30W		35 3500K		24D 24° _{UGR1}	TRI TRIAC			GD Gold	DF Diffusion Filter	
			35 35W		40 4000K		36D 36° _{UGR6}	DL DALI			MR Mirror		
					CCT CCT Tuneable		50D 50° _{UGR10}	BL Bluetooth			BC Black Chrome		

Housing

NCMP95 New Construction Mounting Plate

IC95 IC Rated Housing

Warranty Notes & Disclaimer


Malfunction and damage to product due to incompatible dimming system or misuse will not be covered under warranty. Consult Green Image Tech for recommended drivers. If the fixture has an option to be installed with a dimming control system, consult a dimming system manufacturer with minimum load before installing. Green Image Tech reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products. Consult Green Image Tech website for most updated documentation.

AP-KL4

INDOOR

LED Downlight

Dry/ Damp location

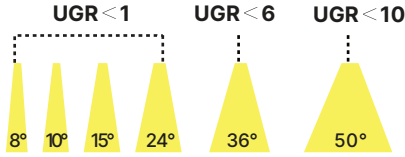

5 YEARS LIMITED WARRANTY INCLUDED | IP20 RATED & TESTED |   IESNA LM-79 | IESNA LM-80 | DIMMABLE 

Performance

Model	Wattage	Efficacy	Fixture Output	CRI	Size
AP-KL4	20 - 35 W	56 - 82 lm/W	1,120 - 2,870 lm	>90	Ø95

Application

Environment	Indoor, Dry / Damp, IP20 (Standard) / IP54 (Optional)
Mounting	Recessed Ceiling Mount (Spring Clip)
Protection Class	Class II
Impact Resistance	IK03
Working Temperature	-20° ~ +40°C
Weight	N/A
Material	Fixture: Die-cast Aluminum Housing Lens: Optical PC / Tempered Glass
Finish	Powder-Coated White or Black

Electrical

Power Supply	120-277V AC, 50/60 Hz
Control	Non-Dimmable / 0-10 V Dimming / TRIAC / DALI
Driver Type	Remote Constant-Current Driver
Surge Protection	N/A
Power Factor Correction (PFC)	> 0.9
Total Harmonic Distortion (THD)	< 15 %

Luminaire Construction


LED Light Source	2700 K / 3000 K / 3500 K / 4000 K / 2700 – 6500 K (Tunable), CRI (Ra): 90+
Optional Feature	Honeycomb Louver, Linear Spread Filter, Diffusion Lens, Multiple Reflector Finishes
Installation	Recessed Ceiling Mount (Spring Clip) — Cut-out: Ø55 mm / Ø75 mm / Ø95 mm
Warranty & LED Life	5 years limited warranty. Estimated life of 50,000 hours
Beam Angle	AP-KL4 – URG <1 (10°, 15°, 24°), UGR <6 (36°), UGR <10 (50°)

AP-KL4

INDOOR

LED Downlight

Dry/ Damp location

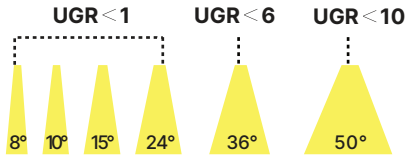

5 YEARS LIMITED WARRANTY INCLUDED | IP20 RATED & TESTED |   IESNA LM-79 | IESNA LM-80 | DIMMABLE 

Specification

Construction

- Precision-machined ADC12 aluminum housing with powder-coated finish
- Available frame colors: White or Black
- Reflector options: matte black, matte white, champagne gold, mirror, or black chrome
- Optical accessories: honeycomb, linear spread filter, diffusion filter
- Designed for recessed indoor applications with remote driver configuration

Mounting

- Recessed mount with spring clip retention
- Ceiling cutout diameters:
 - AP-KL4: Ø 3.74" | 95 mm
- Compatible with ceiling thickness 5 – 20 mm

Warranty

- 5-year limited warranty
- LED lifetime ≥ 50,000 hours

Optical Control & Accessories

- Reflector types: round / pinhole / oval (± 10 % efficiency variance)
- Optional filters:
 - Honeycomb grid – reduces glare
 - Linear spread lens – widens beam
 - Diffusion lens – soft uniform output

Environmental & Compliance

- IP20 (standard) / IP54 (optional)
- Indoor-only rated – not for wet or coastal environments

Electrical

- Input Voltage: 120–277V AC, 50/60hz
- Driver Type: Remote constant-current
- Dimming: Non-dim / 0–10 V / TRIAC / DALI
- Power Factor: > 0.9
- Operating Temperature: –20 °C ~ +40 °C

Optical Performance

- Light Source: CREE COB LED
- CRI 90 +, SDCM < 3 steps
- CCT options: 2700 K / 3000 K / 3500 K / 4000 K / 2700–6500 K (tunable)
- Beam Angles:
 - AP-KL4 – 10° / 15° / 24° / 36° / 50°
- **UGR: ≤ 1 (narrow) / ≤ 3 (wide)**
- Efficacy: up to 120 lm/W (varies by beam and CCT)
- Sustainable design with Zhaga / NEMA connectivity

Dimensions

- Fixture Diameter: 102 mm
- Fixture Height: ~119 mm
- Cut hole: Ø95 mm

Applications

- Residential, retail, and hospitality spaces
- Museums, galleries, and high-end showrooms
- Offices, corridors, and reception areas
- Architectural accent and task lighting

Features


Provide enough light for users without the need for additional wall lights

AP-KL Downlight

Less shadow on face

No additional wall vanity lights

Deep anti-glare High efficiency

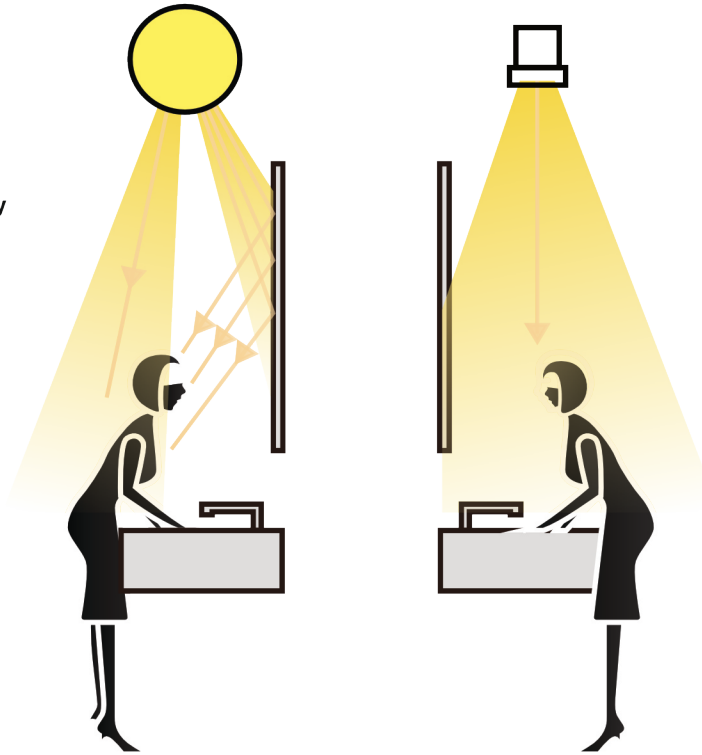



Ordinary Downlight

Single light source with several dark areas, prone to creating uneven facial lighting effects

Patented Lens Design


Naked-eye visible anti-glare optical technology

enables healthy and comfortable lighting conditions




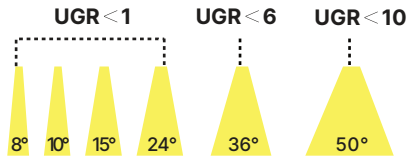
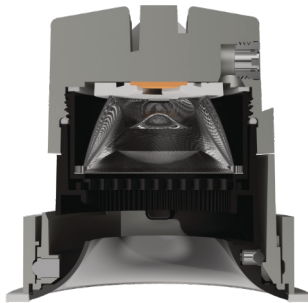


Dimensions




Fixture - AP-KL4

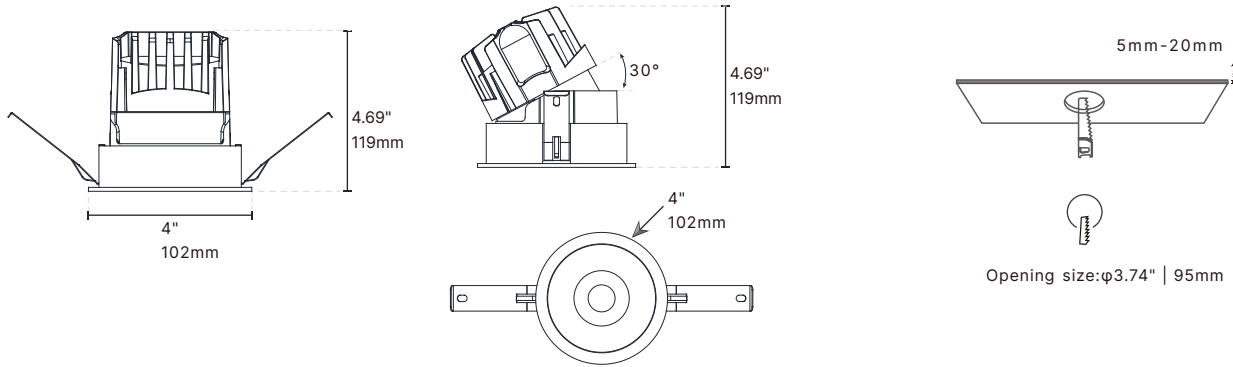

AP-KL4 Beam Angle

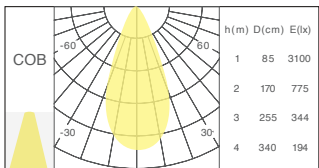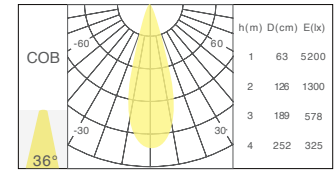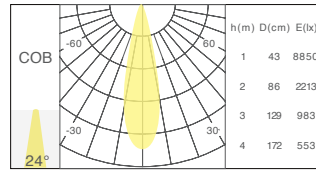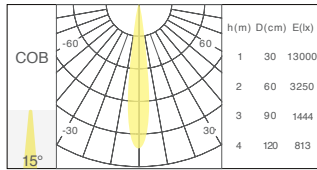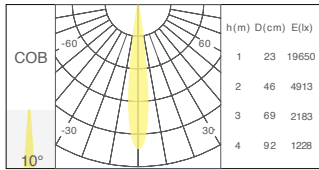

AP-KL4 CCT Tuneable Beam Angle

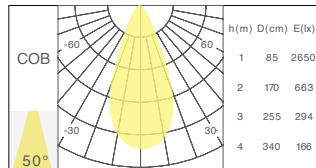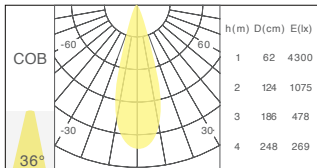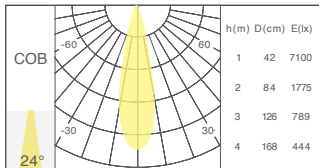

Frame Colour



Black



White

Reflector Type



Round

Reflector Colour



Matte black



Matte white



Champagne Gold



Mirror



Black chrome

Optical Accessory




Honeycomb




Linear Spread
Filter



Diffusion
Filter

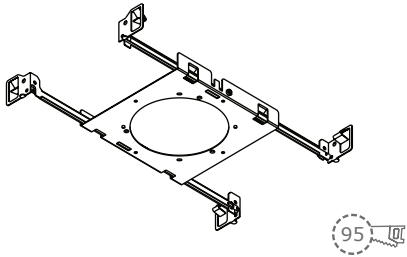NCMP95: New Construction Mounting Plate**New Construction Mounting Plate**

166 x 162 x 26mm

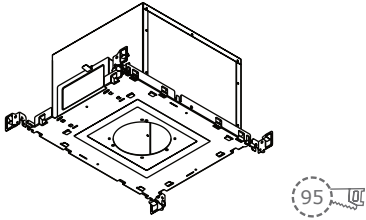IC95: IC Rated Housing**Right Insulated Airtight**

350 x 277 x 207mm