

Type

Project

Notes



ADVANT LIGHTING



AD-BD

LED WALL LIGHT

Die-cast aluminum housing
IP65 rated, suitable for wet locations.
5CCT tuneable (2700K-5000K) in one fixture

5 YEARS LIMITED WARRANTY INCLUDED




IP65 RATED & TESTED

IESNA LM-79

IESNA LM-80

TECHNICAL DRAWING

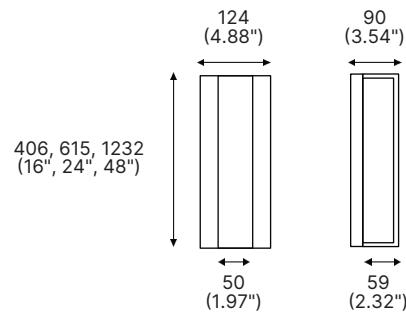

PRODUCT SPECIFICATIONS

Summary	AD-BD16	AD-BD24	AD-BD48
Dimensions	124 × 406 × 90 mm	124 × 615 × 90 mm	124 × 1242 × 90 mm
Lumen Output	400 lm	650 lm	650 lm
Efficacy	26 lm/W	27 lm/W	27 lm/W
Power Consumption	15 W	24 W	24 W
LED	SMD	SMD	SMD
Input Voltage	120-277V AC	120-277V AC	120-277V AC
CCT	Tuneable CCT (27-30-35-40-50)	Tuneable CCT (27-30-35-40-50)	Tuneable CCT (27-30-35-40-50)
Beam Angle	120°	120°	120°
CRI	Ra80	Ra80	Ra80
IP rating	IP65	IP65	IP65
Finish	Black/ Brown	Black/ Brown	Black/ Brown
Material	Aluminium + PC + Steel	Aluminium + PC + Steel	Aluminium + PC + Steel
Working Temperature	-40° ~ 40°C	-40° ~ 40°C	-40° ~ 40°C
Warranty	5 Years	5 Years	5 Years

ORDER FORM

AD-BD									
1	2	3	4	5	6	7	8		
2. SIZE	3. WATTAGE	4. VOLTAGE	5. CRI	6. CCT	7. BEAM	8. DIMMING			
16 16"	15 15W	A 120-277V AC	R80 Ra80	CCT CCT Tuneable (27-30-35-40-50K)	120D 120°	DM 0-10V			
24 24"	24 24W					TRI TRIAC			
48 48"									