


PRODUCT NAMING RULES



ICON DESCRIPTION


Bendable

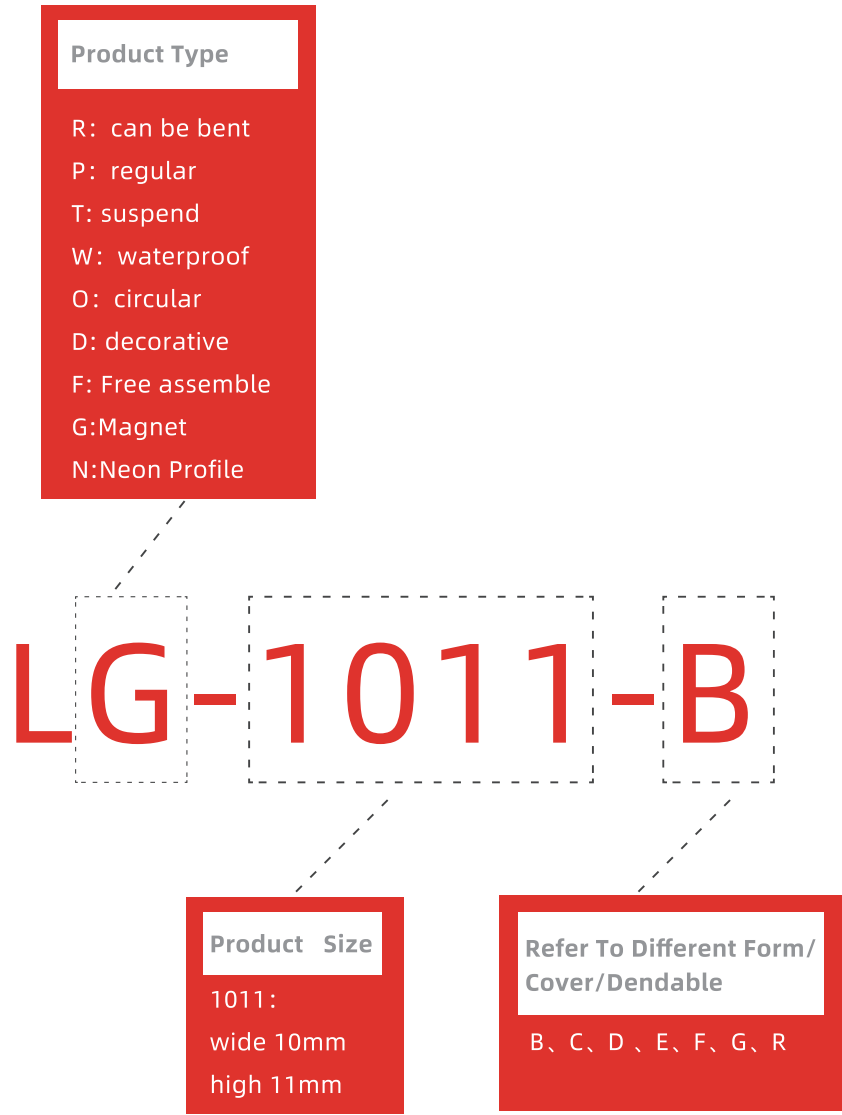

Pendant



Surface mounted



Clip mounted



Recessed





Stairs mounted



Others




LED PROFILE IN ANYWHERE

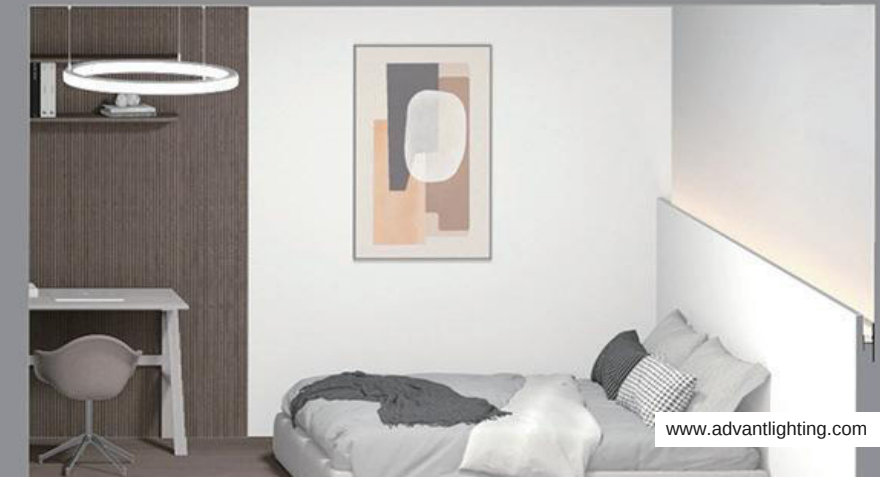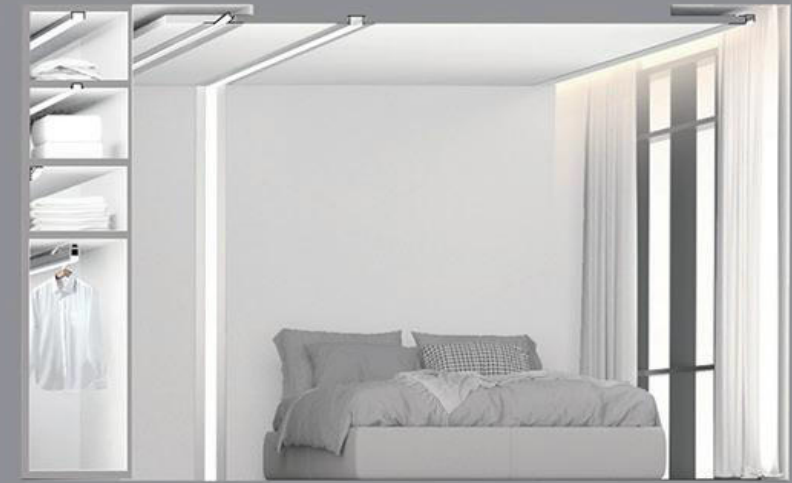

1.1 NEW PROFILE

NEW LED PROFILE RANGE

NEW !

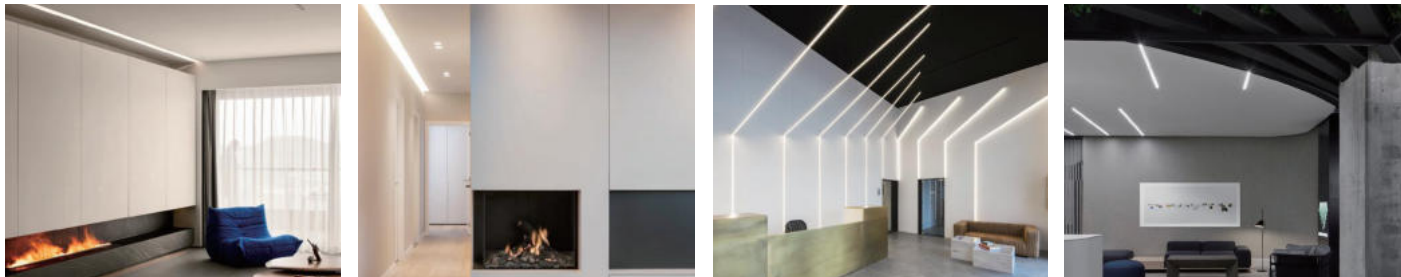

LP2124
NEW
P39

LP2135
NEW
P40

LP2530
NEW
P41

LP2530A
NEW
P42

LP2530B
NEW
P43

LP2537L
NEW
P44

LP2537P
NEW
P45

LP2537S
NEW
P46

LP2890L
NEW
P47

LP2890P
NEW
P48

LP2890S
NEW
P49

LD4529
NEW
P50

LD5173L
NEW
P51

LD5173P
NEW
P52

LD5173S
NEW
P53

LD6733L
NEW
P54

LD6733P
NEW
P55

LD6733S
NEW
P56

LD2350
NEW
P57

LD2355
NEW
P58

LD2355B
NEW
P59

LD2355C
NEW
P60

LD2490
NEW
P61

LD3850
NEW
P62

LD5045
NEW
P63

LD5814
NEW
P64

LD2919
NEW
P65

LD4843
NEW
P66

LD2660
NEW
P67

LT2950
NEW
P68

LT1450
NEW
P69

LT1060
NEW
P70

LT1397
NEW
P71

NEW !

NEW "FISH" SERIES PROFILE

LP4315A
NEW
P67

LP4315B
NEW
P68

LP4315C
NEW
P69

LP4315D
NEW
P70

LP4315E
NEW
P71

NEW !

NEW REGULAR LED PROFILE SERIES

LP1010E
NEW
P73

LP2417
NEW
P74

LP1616A
NEW
P75

LP1712E
NEW
P76

LG1814
NEW
P77

LO2424
NEW
P78

LO2727
NEW
P80

LP3030G
NEW
P81

LP1010B
NEW
P82

LP1010D
NEW
P83

LP4510
NEW
P84

LP1612N
NEW
P85

LP1612Z
NEW
P86

LP1615Z
NEW
P87

LP2212Z
NEW
P88

1.2 INTEGRATED DECORATION OF GYPSUM BOARD

NEW !

LD6112
NEW
P90

LD6112B
NEW
P92

LD4242C
NEW
P94

LD4242D
NEW
P94

1.3 INNOVATOR (NEW GENERATION LED PROFILE)

IP20 IP65

GL1810
NEW
P98

GL2510
NEW
P99

GL2016
NEW
P100

GL1818
NEW
P101

GL2516
NEW
P102

GL2018
NEW
P103

GL1919A
NEW
P104


GL1919B
NEW
P105

GL2525
NEW
P106

Product catalogue

MORE MODELS SHOWED ON OTHER CATALOGUES


1.4 SHINE (LOW-GLARE LED PROFILE SERIES)

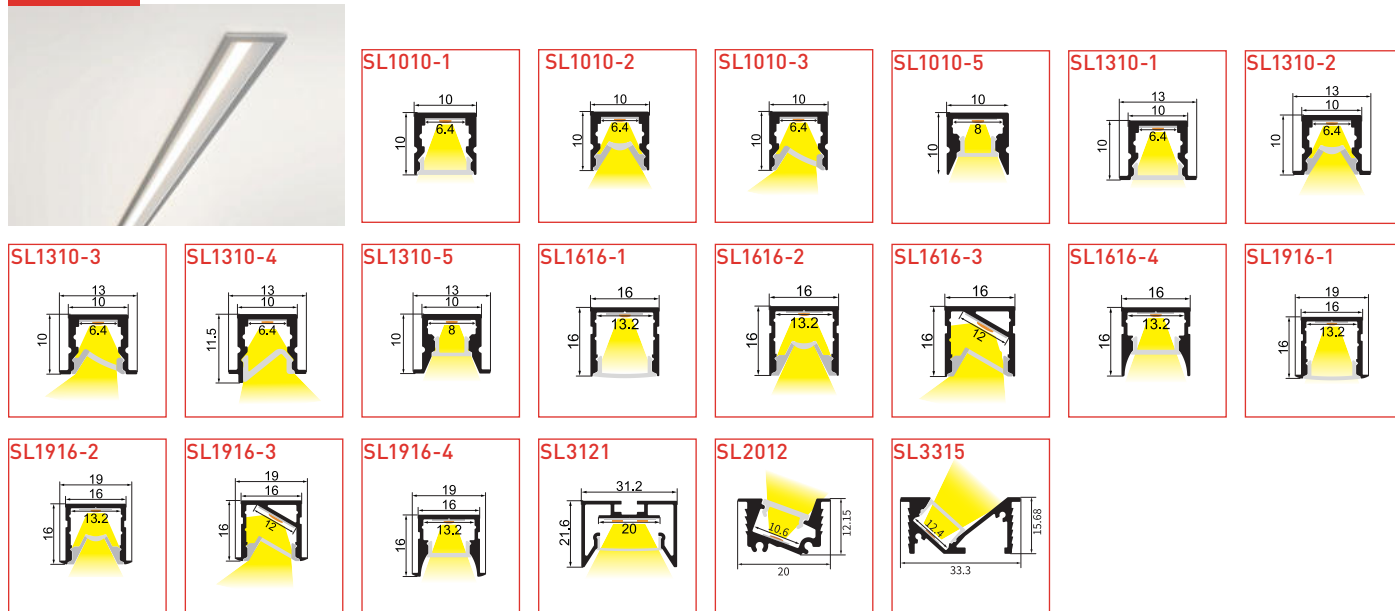



1.5 LED PROFILE WITH WELDING FREE END CAP SERIES




1.6 RAINBOW LED PROFILE SERIES

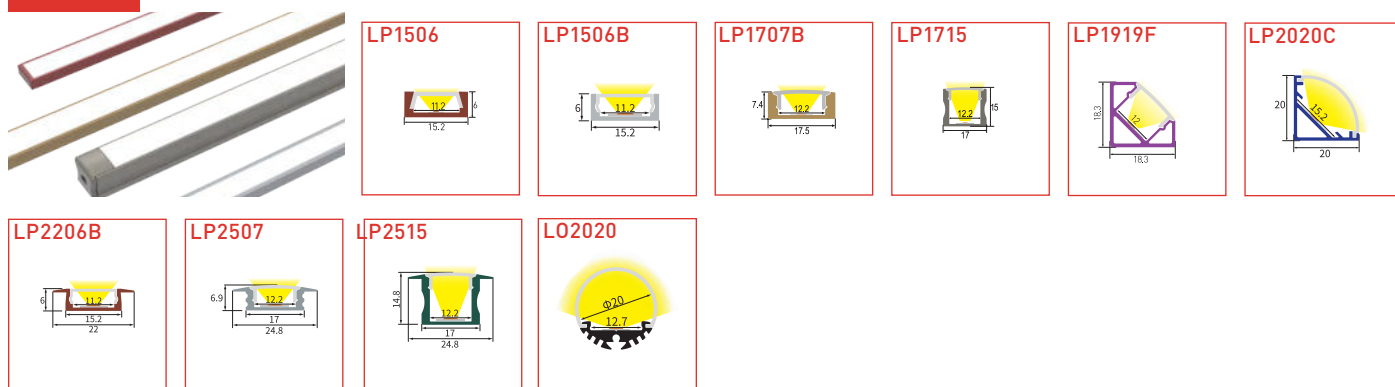


1.7 SILICONE NEON

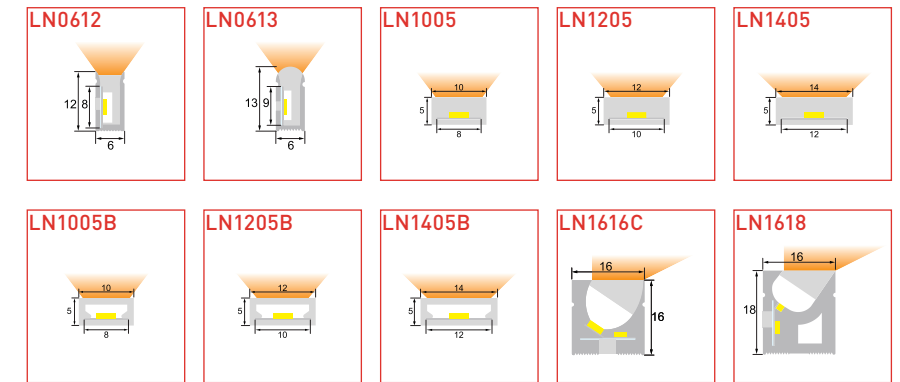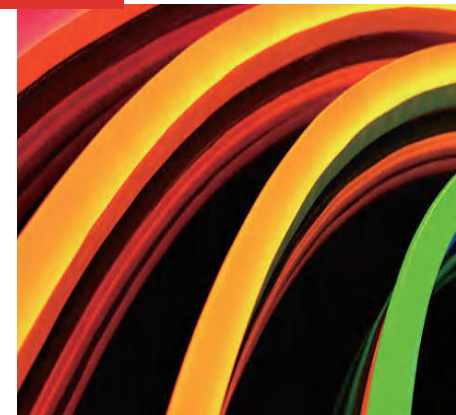

1.8 BENDABLE PROFILE

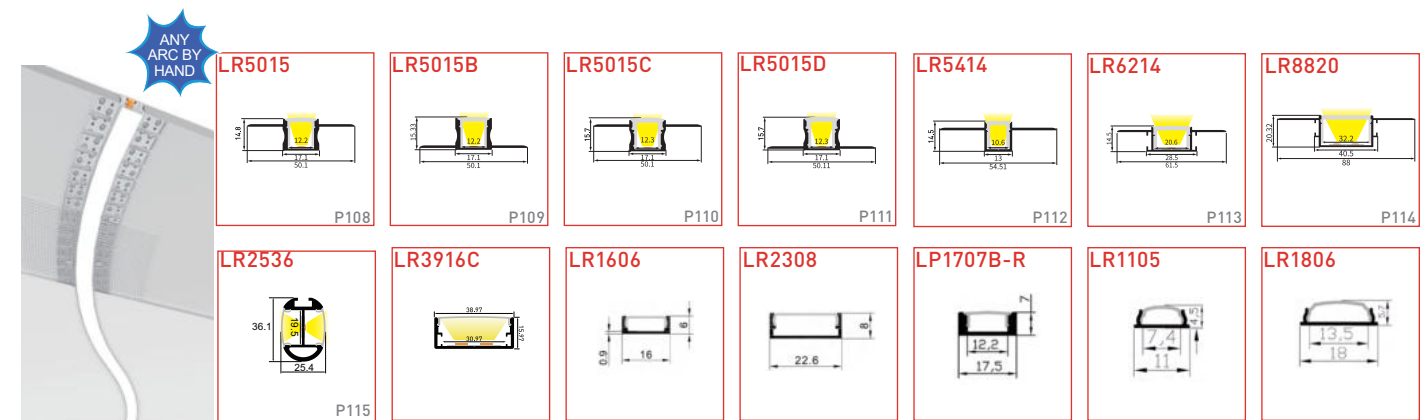


1.9 TWISTABLE LED PROFILE



2.1

AUTOMATIC ASSAMBLE
MACHINE FOR LED BAR





AUTOMATION

NEW !

2.2

















SLIM LIGHT PROFILE

SL1007C 	SL1007C-2 	SL1707E 	SL1707E-2 	SL1012D 	SL1012D-2 	SL1712D 	SL1712D-2 
SL1609 	SL1609-2 	SL2416B 	SL2416B-2 	SL2109B 	SL2109B-2 	SL2909 	SL2909-2 
SL1615G 	SL1615G-2 	SL1615C 	SL1615C-2 	SL2115C 	SL2115C-2 	SL2921 	SL2921-2 
SL2011 	SL2011-2 	SL2011B 	SL2011B-3 	SL2011C 	SL2011C-3 	SL1818B 	SL1818B-3 
SL1818C 	SL1818C-3 	SL1818E 	SL1818E-3 	SL2525 	SL2525-3 	SL2906 	SL2914 

2.3

"FISH" SERIES PROFILE









The cross section of cover is various, similar to the shape of fish tail, fish head, fish fin, fish belly and so on.

	LP2613U 	LP2613A 	LP2613B 	LP2613C 	LP2613D 	LP2613E 	
LP2613F 	LP2613G 	LP2613H 	LP2611 	LP2611A 	LP2611B 	LP2611C 	LP2611D 
LP2611E 	LP2611F 	LP2611G 	LP2611H 				

2.4

SEMI-HIDDEN PROFILE

Three designs available, Suitable for different venues. With light shielding: can effectively block part of the overflow light effect, viewing is not blinding. Without light shielding: wider light angle.

	LP1214 	LP1914 	LP1719 	LP1610B 	LP2609 	LP2415 
LP1616I 	LP2616 	LP2416 				

2.5 SQUARE PROFILE


Lampshades completely cover aluminum profiles without any aluminum edge. Customizable lampshades in various colors to match different scenes, ensuring the perfect integration of lighting fixtures with the environment.




LP0808D



LP1508D




LP0808D-1




LP1212D



LP2012D




LP1212D-1




LP1616D



LP2316D



LP1616D-1



Light emitted from a 28° inclined plane

Unique shapes. Square design, quick and simple installation.


LP0808H



LP1508C



LP0808H-1



LP1212H



LP2012C




LP1212H-1



LP1616H



LP2316C




LP1616H-1




LP2020H




LP2820C



LP2020H-1




LP2525H



LP3325C



LP2525H-1



LP3030H



LP3830C



LP3030H-1



LP1111C



LP1515C



LP1919C



LP2525S



LP3030S




LP2828H



2.6 DEEP RECESSED LIGHT PROFILE

The diffuser cover concave into the aluminum case design, can prevent the side lighting diffusion, achieve the effect of increasing lightness and care of eyes as well.

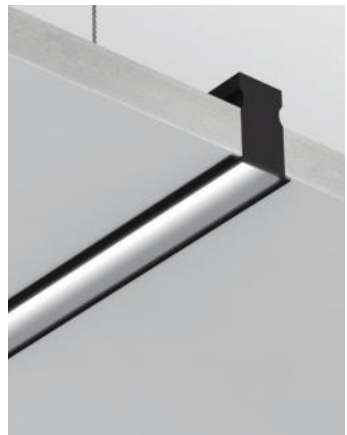

Low glare

LP2037



LP2226




LP2837




LP2926



LP1016




LP1615F




LP1622



LP1817




LP1824




LP2025



LP2531




LP3136



2.7 ULTRA THIN PROFILE

This range products with simple structure and exquisite appearance ,easy installation; It protects your eyes from avoding direct light, better achieve the perfect creative light and healthy people-oriented light. Installation methods include suspension, wall hanging, ceiling recessed, suitable for office, commercial, home lighting

With ultra-thin design

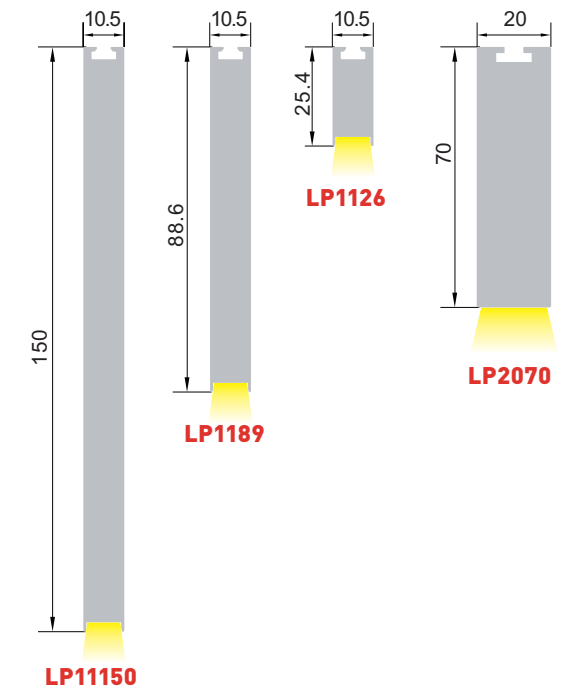


2.8 MINI PROFILE

Mini profile has a small size and it's easy to install it. The lighting emitted from it is fine and delicate. It is suitable for household lighting and commercial lighting, etc.



LP0607




LP0610




LP0808




LP0808C




LP1010C



LP1107



LP1110



Extremely narrow light-emitting area Only 3.5mm

2.9 MAGNETIC PROFILE



This series of creative magnetic device design, can be installed by magnetic suction and hidden mounting clips, Easy to install, simple and beautiful. Magnetic installation: it can rotate 360° and can move freely. Embedded installation: can hide the mounting clips, easy to install and beautiful appearance.

Creative Design of Magnetic and Concealed Installation




3.1 DECORATIVE PROFILE

Designed for different building structure (ceilings, wall under corner, inside corner, outside corner, etc) it perfectly explains the combination and the artistic conception of light and space.

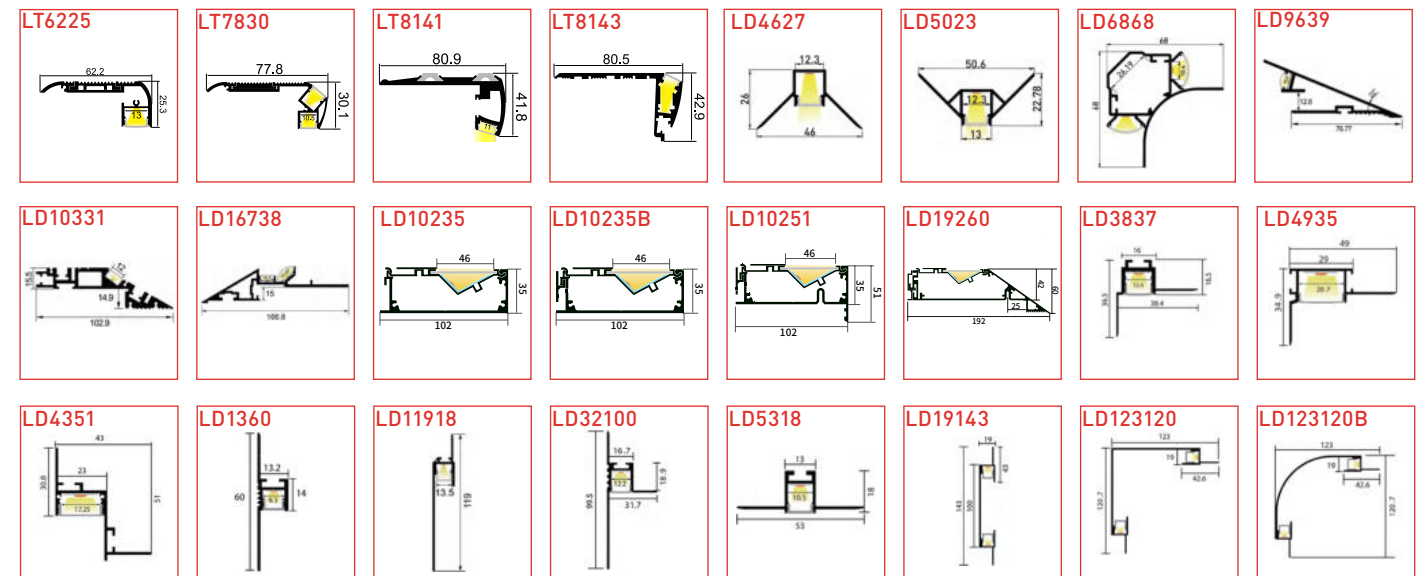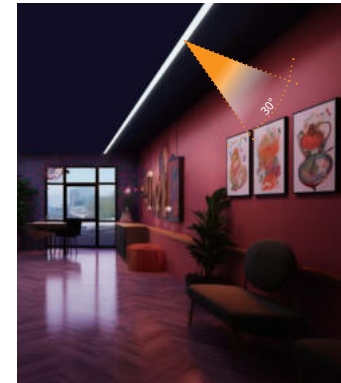


EMBEDDED PROFILE

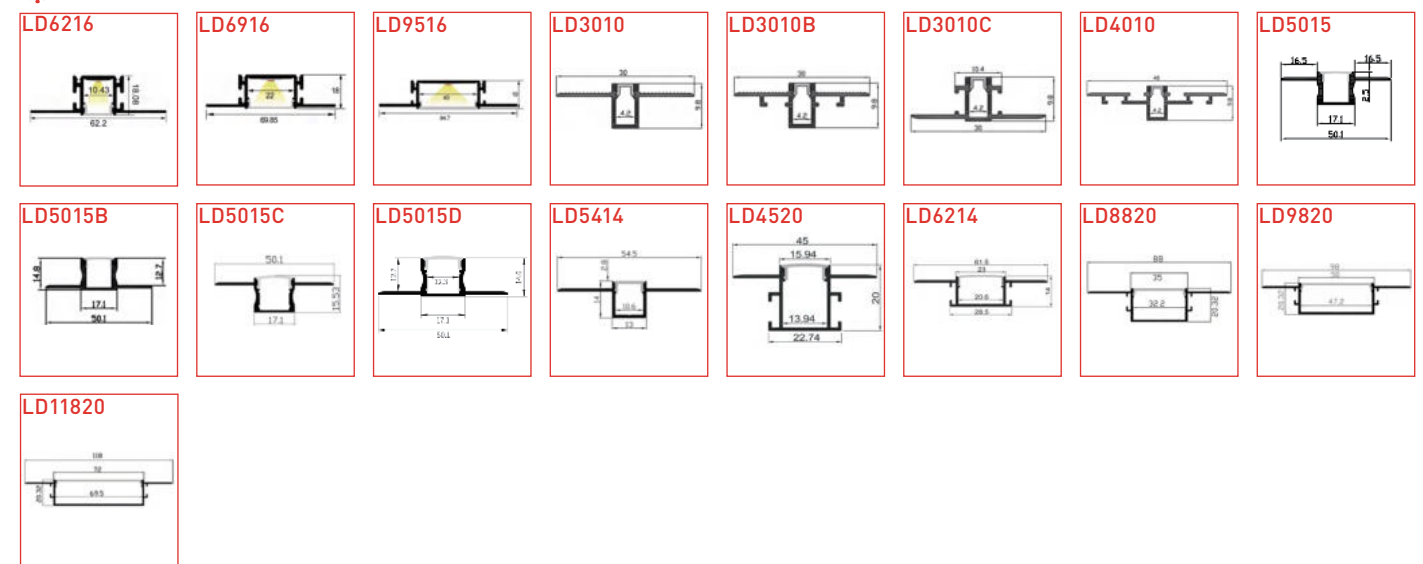



3.1 DECORATIVE PROFILE

Designed for different building structure.(ceilings, wall under corner, inside corner, outside corner, etc) it perfectly explains the combination and the artistic conception of light and space.



SKIRTING DECORATIVE PROFILE

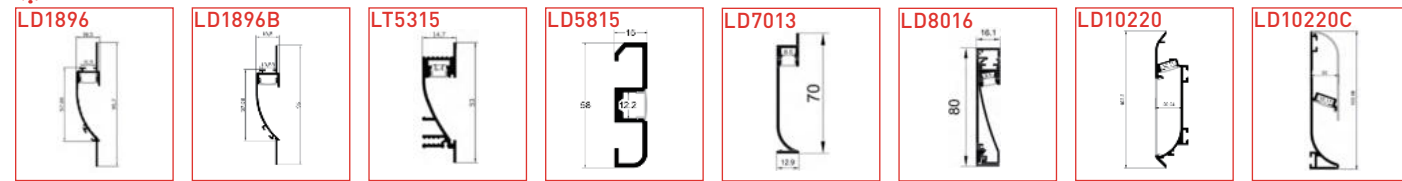



CEILING DECORATIVE PROFILE

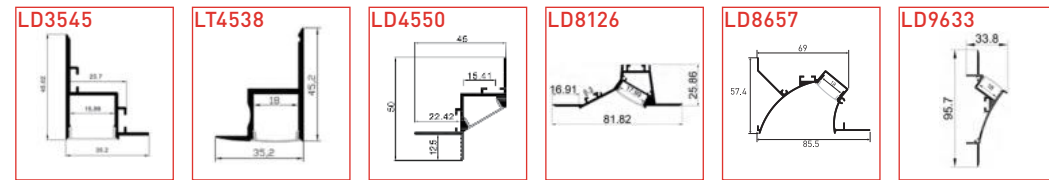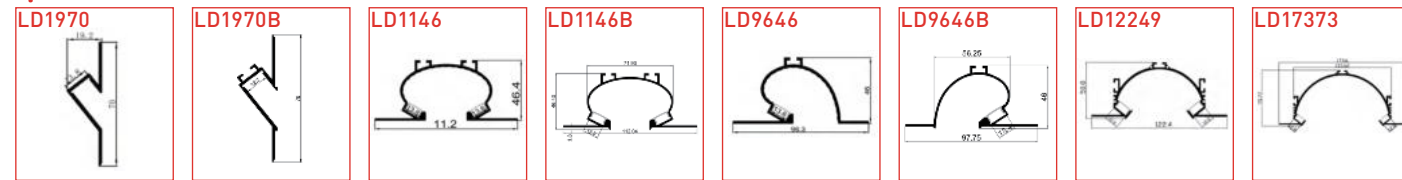


BUSINESS HOME DECORATION PROFILE

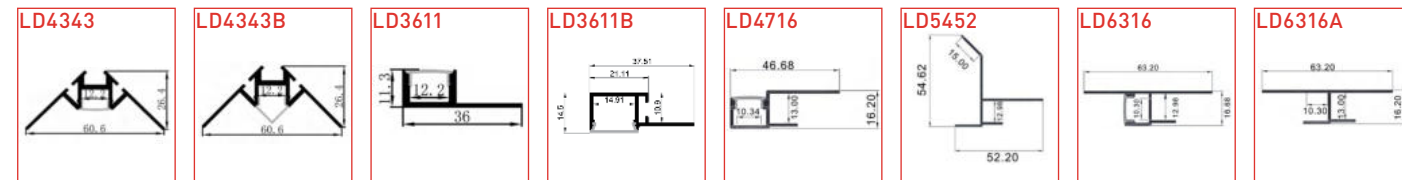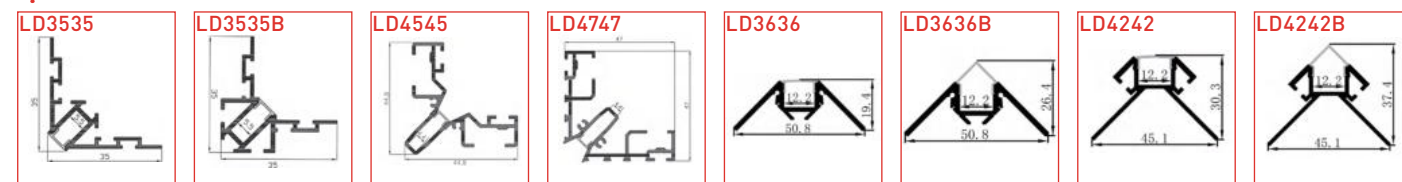

BUSINESS HOME DECORATION PROFILE

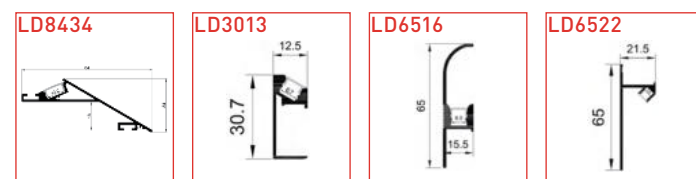
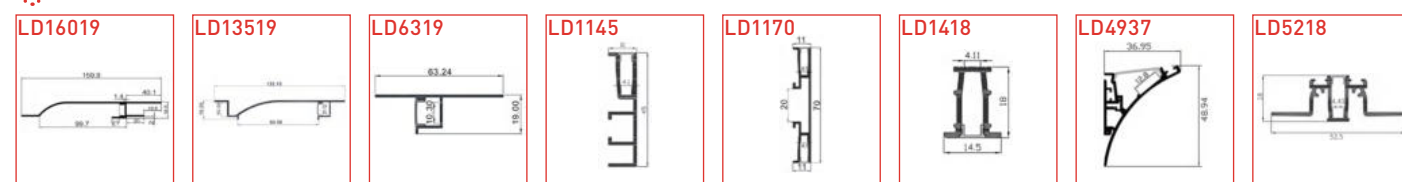


STAIR PROFILE

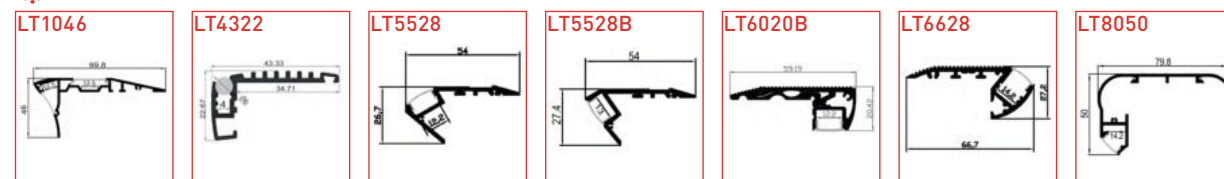

3.2 SPECIAL POSITION LED PROFILE


The main characteristics of regular series products: small-sized, auxiliary lighting. Suitable for cabinet, wine cabinet, wardrobe, shelf, furniture, jewelry counter, etc.

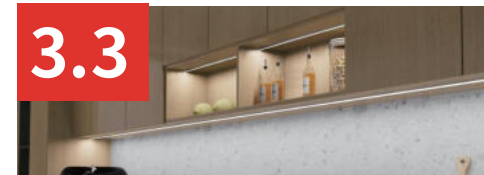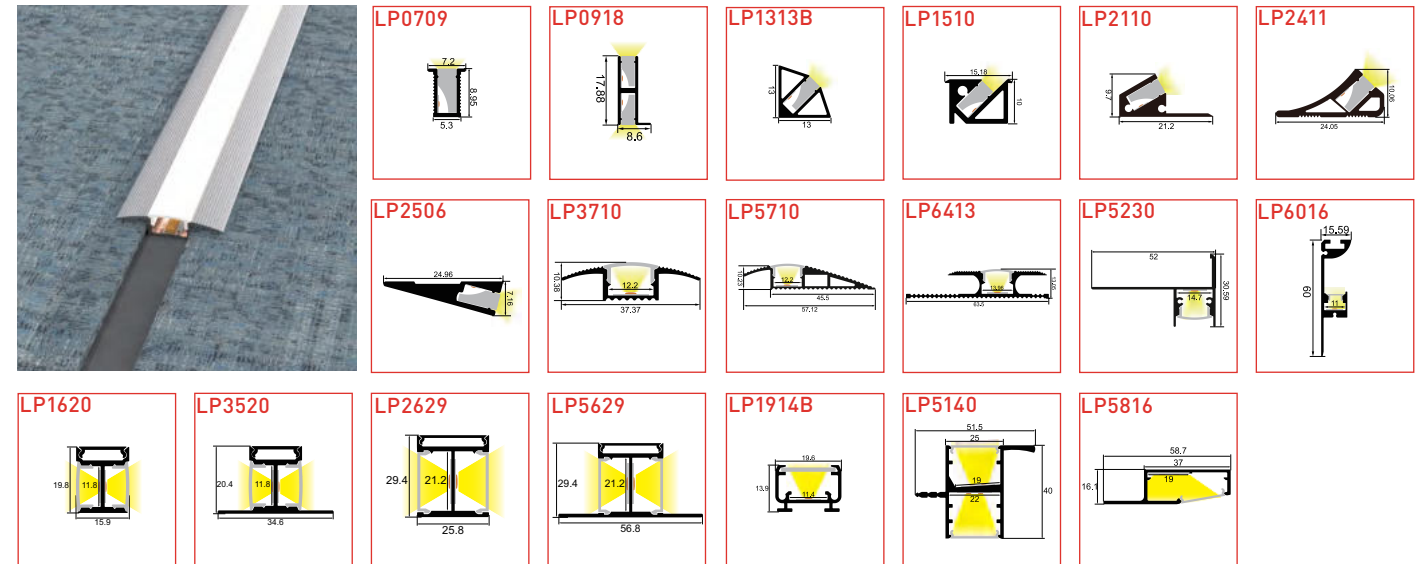

3.3

REGULAR PROFILE


The main characteristics of regular series products: small-sized, auxiliary lighting. Suitable for cabinet, wine cabinet, wardrobe, shelf, furniture, jewelry counter, etc.

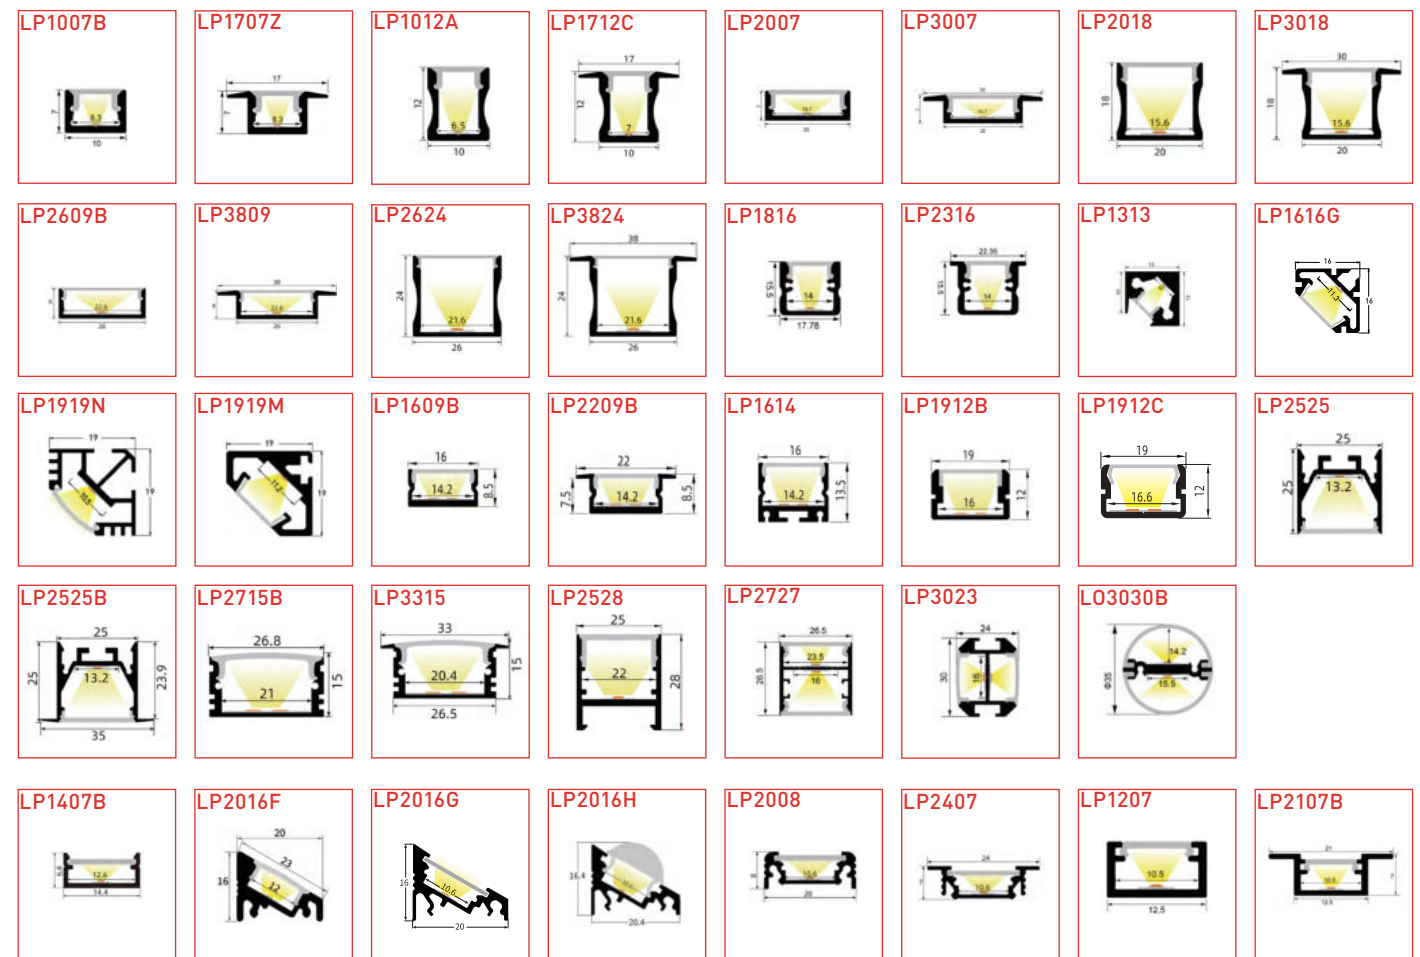

3.3 REGULAR PROFILE


The main characteristics of regular series products: small-sized, auxiliary lighting. Suitable for cabinet, wine cabinet, wardrobe, shelf, furniture, jewelry counter, etc.

GLASS EMBED PROFILE SERIES

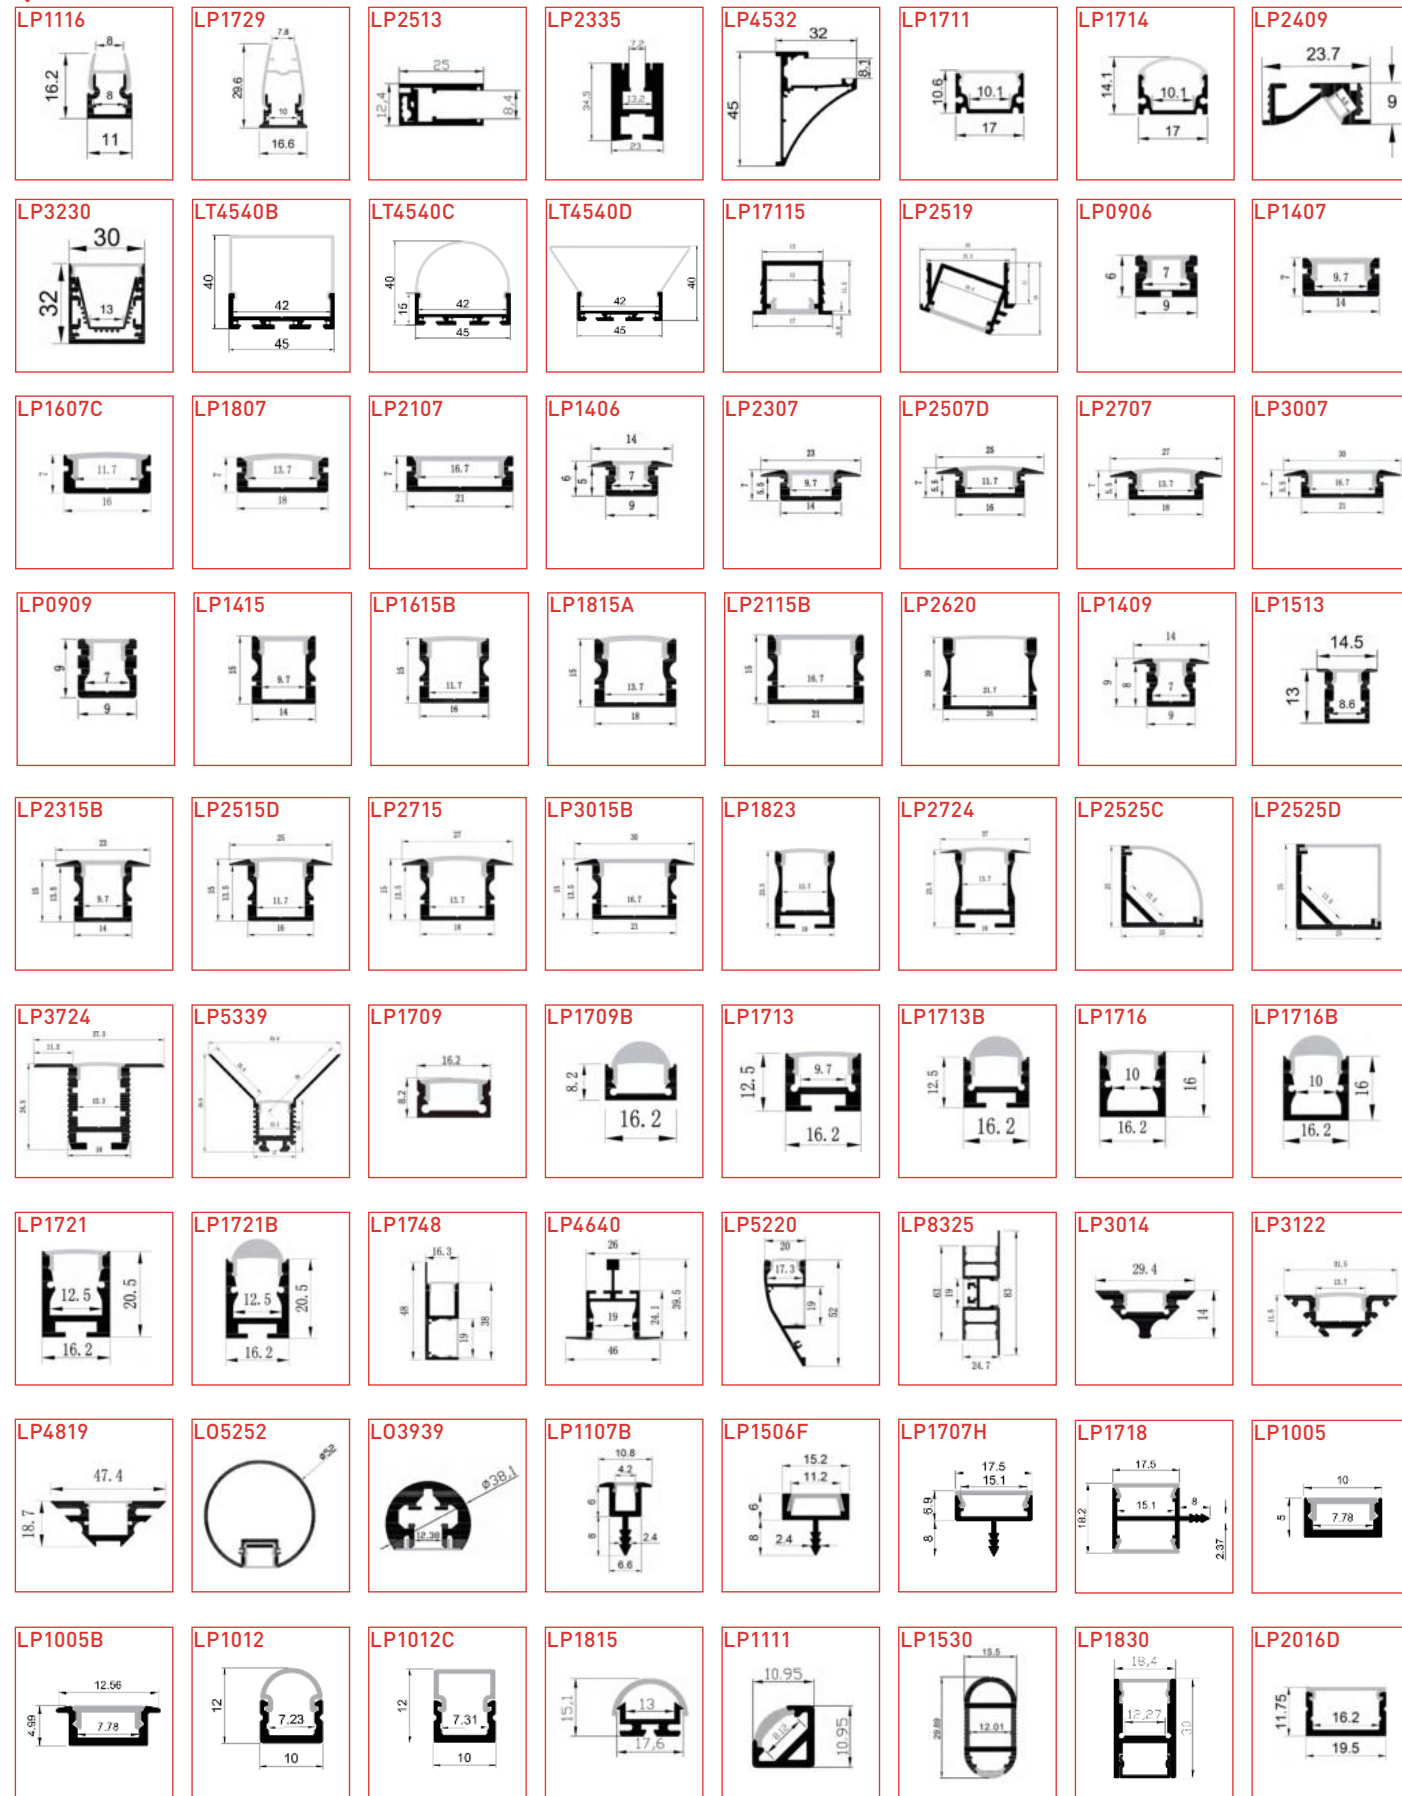

3.3 REGULAR PROFILE

The main characteristics of regular series products: small-sized, auxiliary lighting. Suitable for cabinet, wine cabinet, wardrobe, shelf, furniture, jewelry counter, etc.

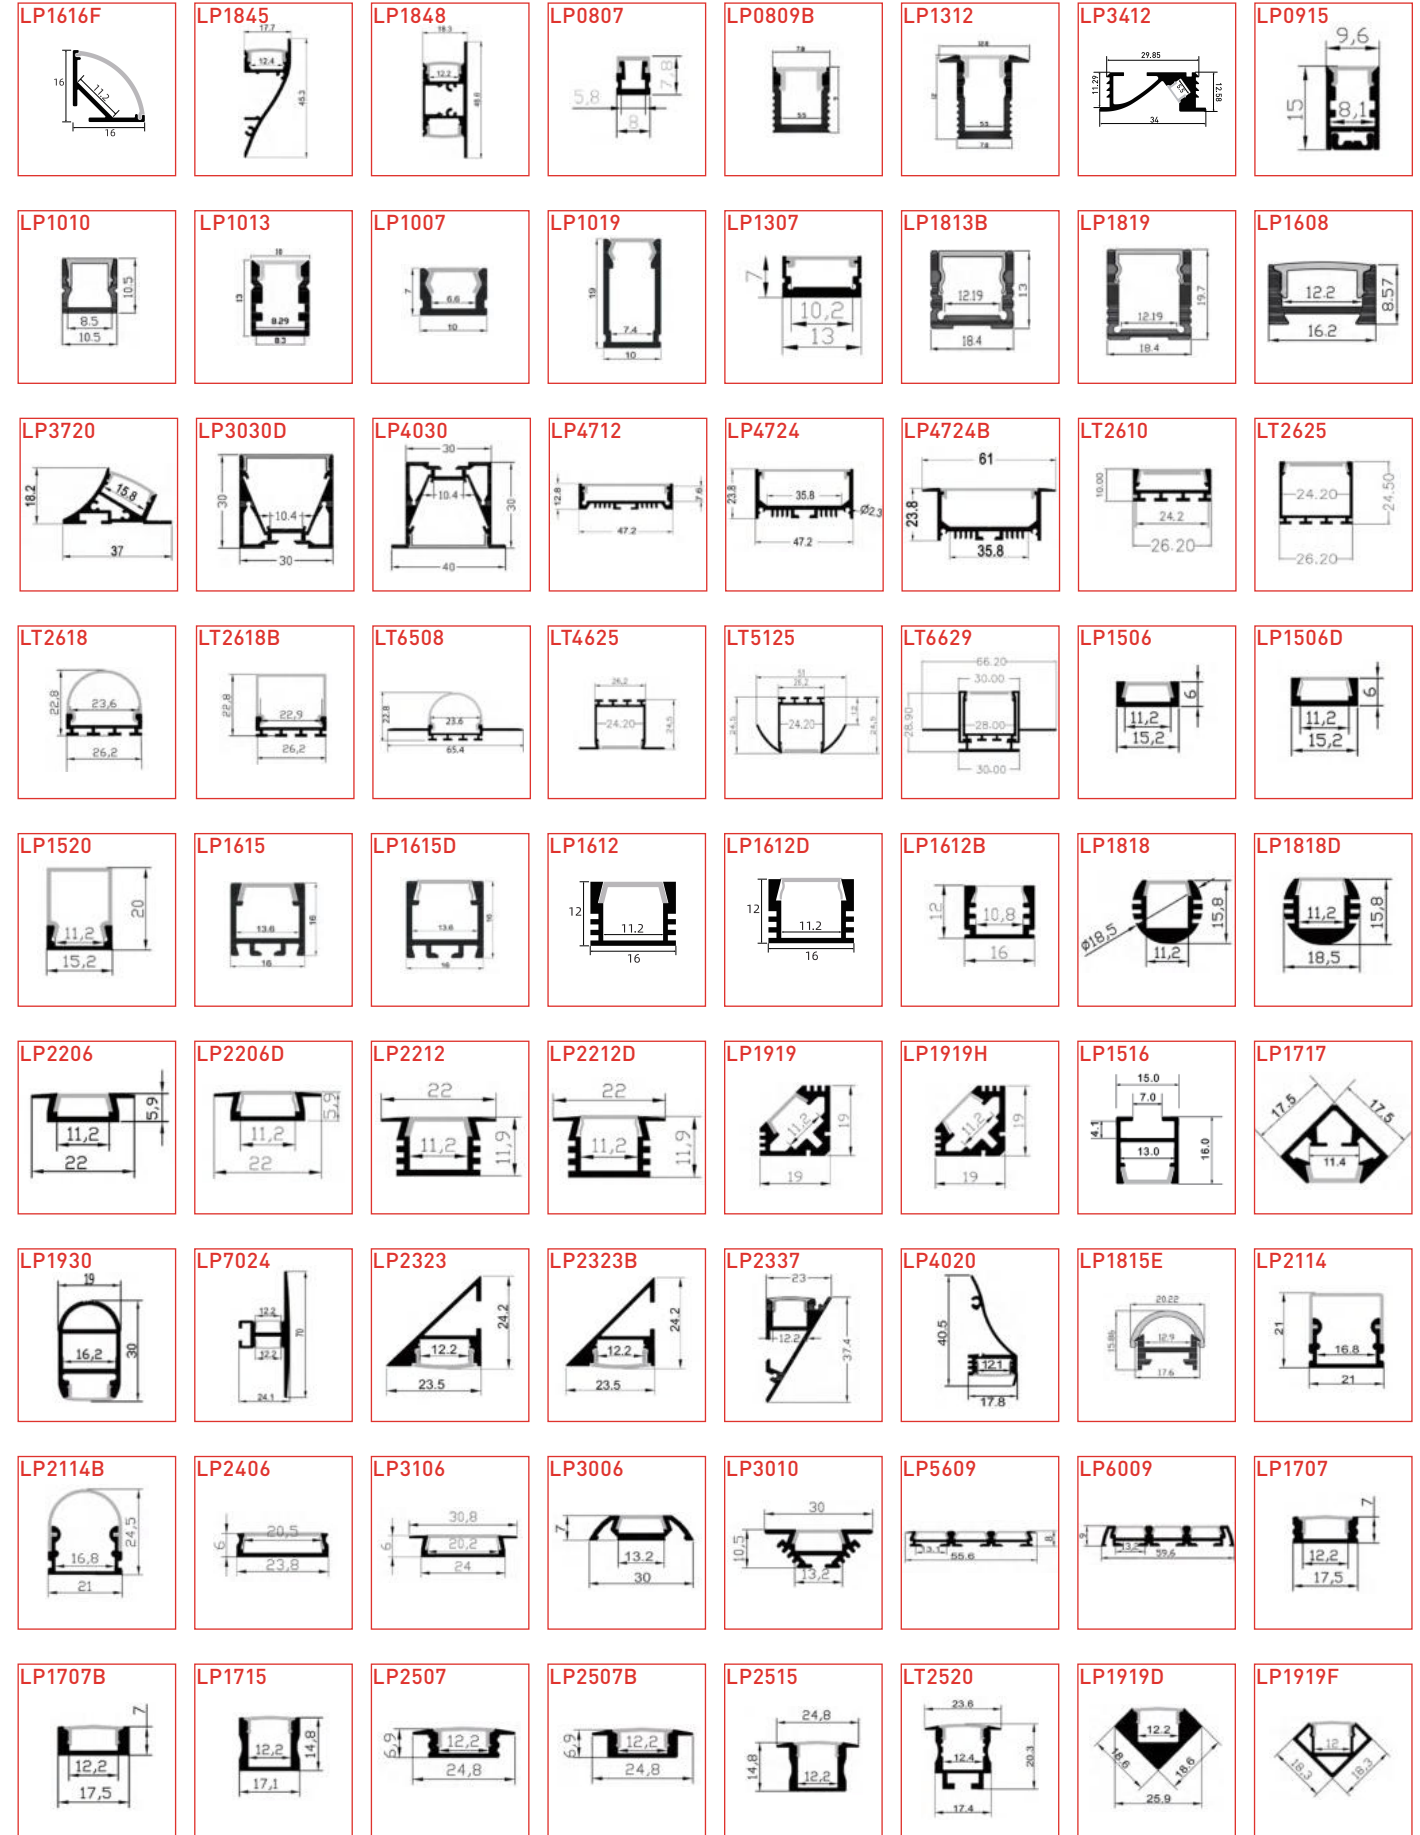

3.3 REGULAR PROFILE

The main characteristics of regular series products: small-sized, auxiliary lighting. Suitable for cabinet, wine cabinet, wardrobe, shelf, furniture, jewelry counter, etc.




3.3 REGULAR PROFILE

The main characteristics of regular series products: small-sized, auxiliary lighting. Suitable for cabinet, wine cabinet, wardrobe, shelf, furniture, jewelry counter, etc.




3.4 FREE ASSEMBLE PROFILE

Free combination of any height, any shape or size, and variable structure. It gives more option to our customers. This series achieves individualistic design concept. Consumers can freely combine more products of different sizes together according to the existing product sizes. Suitable for jewelry counters, commodity shelves, home, wine cabinets, as well as corridors, ceilings, offices and other different places.

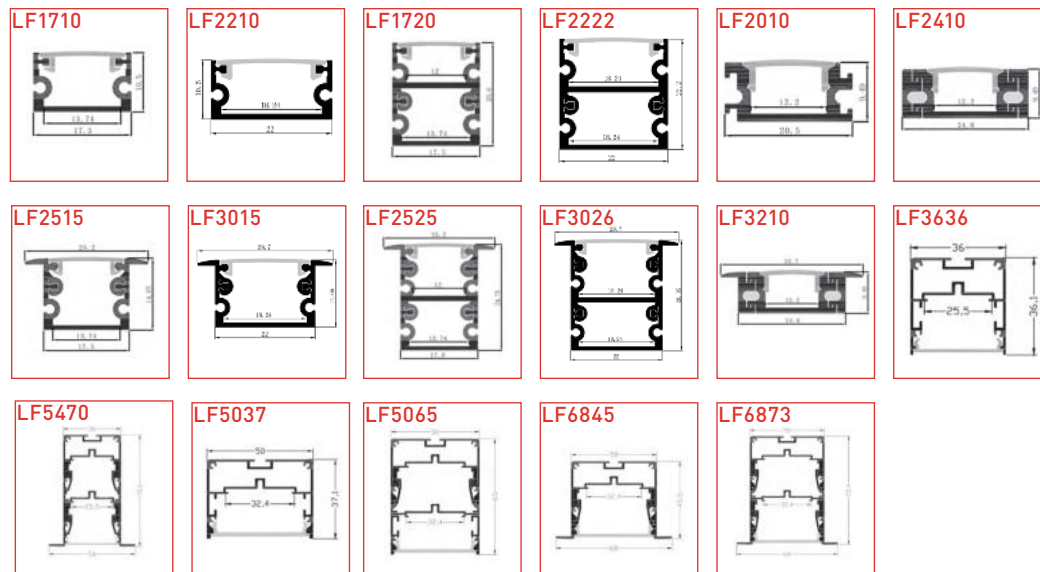


3.5 NEON SILICONE PROFILE

Flexible silicone profile, Recessed silicone profile with trim, no need insert the LED strips inside.

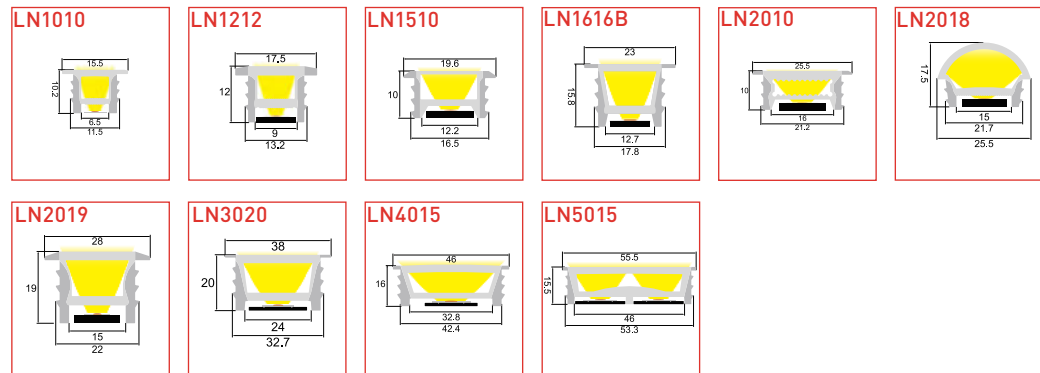


3.6 WATERPROOF PROFILE

LED waterproof profile constitutes a simple structure and it's easy to install it. Its waterproof grade is IP65. It is suitable for lighting of squares, gardens and streets, etc.

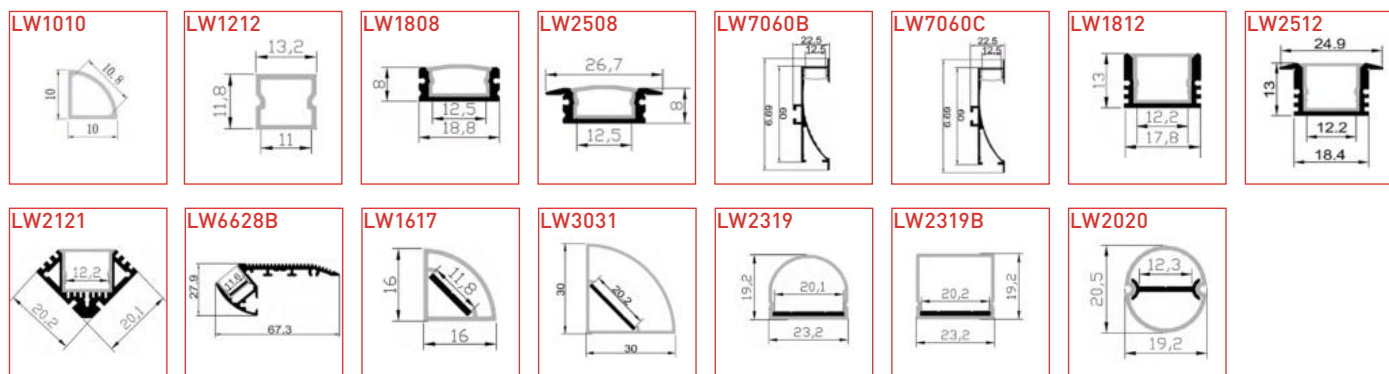

3.7 LINEAR PROFILE



































This series could be used as main lighting, with large luminous surface. The products are divided into pendant, recessed, surface-mounted and wall-mounted. This series is suitable for office lighting, commercial lighting, etc.

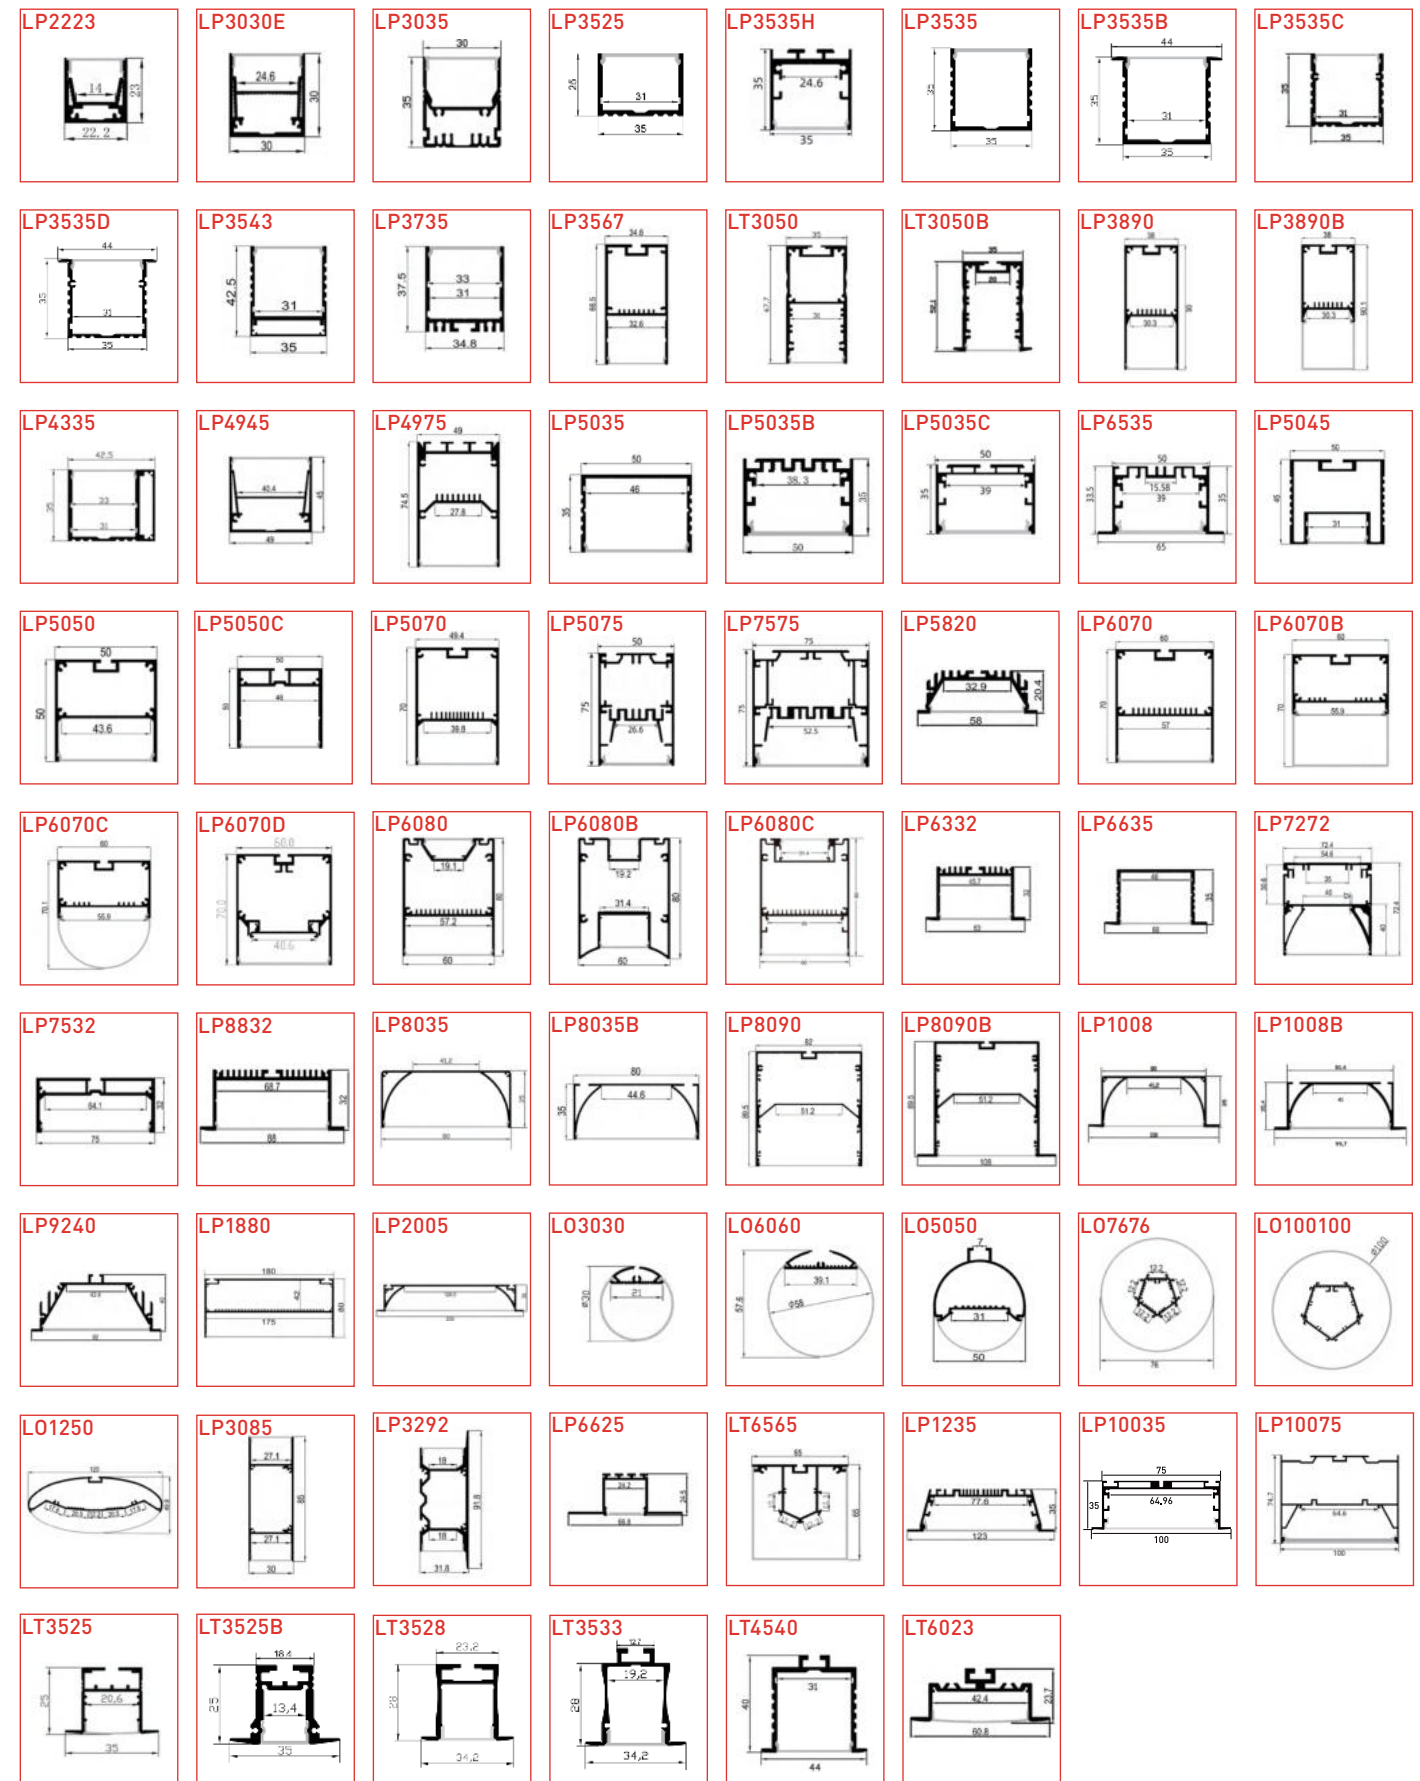



























NEW LINEAR LIGHTING SYSTEM(NLS 1.0)

FREE LINE (INTERNAL POWER SERIES)



LS3360S-N  P26	LS3360S-G  P26	LS3360S-R  P26	LS4360S-N  P27	LS4360S-G  P27	LS4065S-N  P28		
LS4065S-G  P28	LS4065S-L  P28	LS4065S-R  P28	LS5565S-N  P29	LS5565S-G  P29	LS5565S-L  P29		
LS5475S-N  P30	LS5475S-G  P30	LS5475S-L  P30	LS5475S-R  P30	LS7475S-N  P31	LS7475S-G  P31	LS7475S-L  P31	LS6580S1-N  P32
LS6580S1-G  P32	LS6580S1-L  P32	LS6580S2-N  P33	LS6580S2-G  P33	LS8580S-N  P34	LS8580S-G  P34	LS8580S-L  P34	LS115130S-N  P35
LS115130S-G  P35	LS140130S-N  P36	LS140130S-G  P36	LS4688S-N  P37	LS4688S-M  P37	LS70100S-N  P37		






FREE LINE (EXTERNAL POWER SERIES)






LS3325S-N  P25	LS3325S-G  P25	LS3325S-L  P25	LS4325S-N  P25	LS4325S-G  P25	LS4325S-L  P25	LS4330S-R  P30	LS4030S-N  P30
LS4030S-G  P30	LS4030S-L  P30	LS5530S-N  P30	LS5530S-G  P30	LS5530S-L  P30	LS5535S-R  P35	LS5435S-N  P35	LS5435S-G  P35
LS5435S-L  P35	LS7435S-N  P35	LS7435S-G  P35	LS7435S-L  P35	LS6535S-N  P35	LS6535S-G  P35	LS6535S-L  P35	LS8535S-N  P35
LS8535S-G  P35	LS8535S-L  P35						


Product catalogue



FREE ARC


 LS3235A-II Straight line Modular series → P56	 LS3235A-II Plane arc Modular series → P57	 LS3235A-II Inner glow Modular series → P58	 LS3235A-II Outer glow Modular series → P59	 LS3235A-II Round lighting Modular series → P60
 LS4550 Straight line Modular series → P61	 LS4550 Plane arc Modular series → P62	 LS4550 Inner glow Modular series → P63	 LS4550 Outer glow Modular series → P64	 LS4550 Round lighting Modular series → P65
 LS6070A-II Straight line Modular series → P66	 LS6070A-II Plane arc Modular series → P67			

LS4065A 	LS5475A 	LS2528A 	LS4550D 	LS5390A 	LS6070A-II 	LS8090A 
---	---	---	---	---	--	---

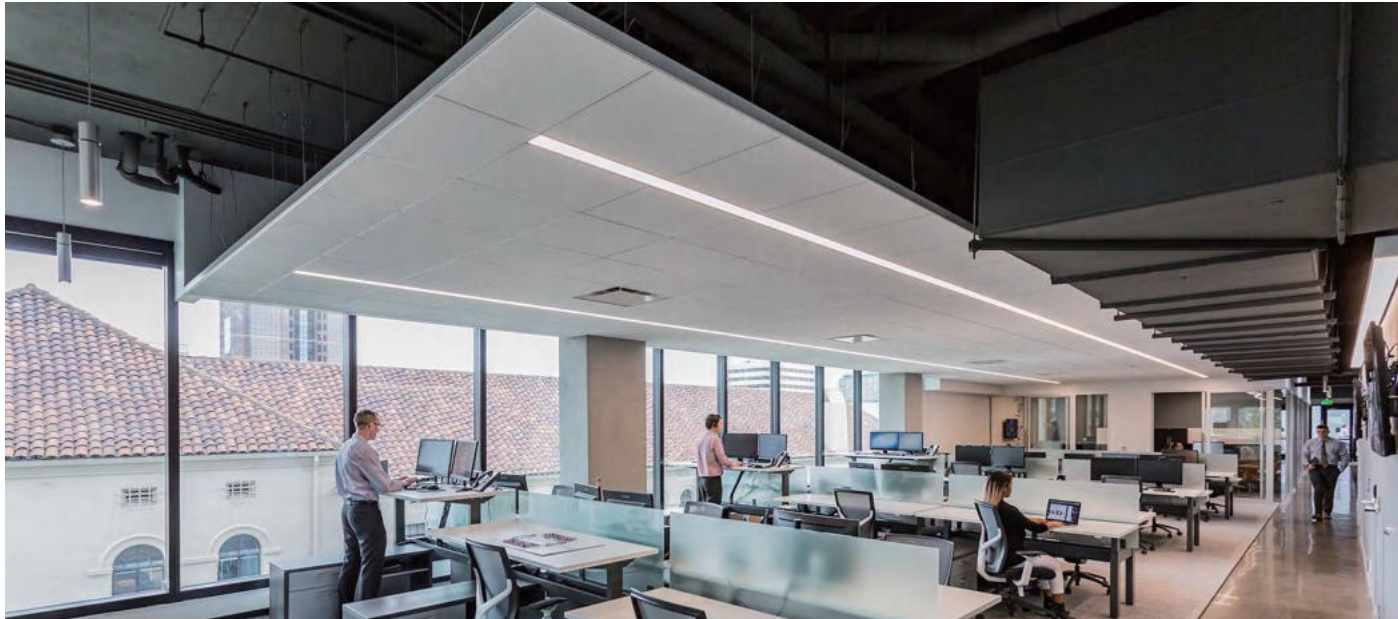


SMART LINEAR LIGHTING SYSTEM 3.0

This series of products has waterproof IP65 aluminum cover, diffuser cover transparent cover, reflector cup, black light cover, anti-glare models etc. with features of various shapes, beautiful appearance, simple structure, wireless extension, easy installation and so on. Installation methods include lifting, in-line, wall-mounted and ceiling-mounted. Suitable for office, commercial, home lighting.

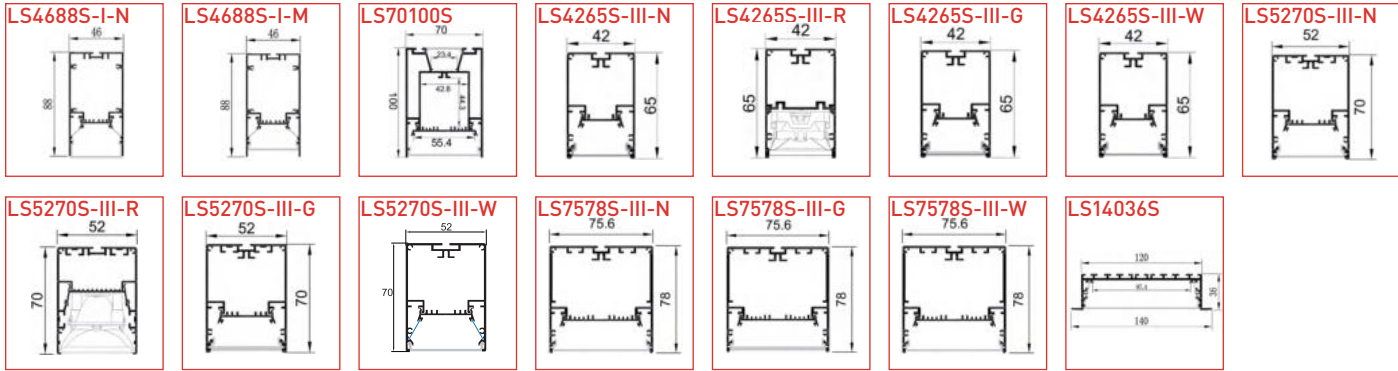

SMART LINEAR LIGHTING SYSTEM 2.0




The series of products boasts clear lines, simple structure, wireless extension and freely-spliced features. The following installation methods are available: edgeless embedded, ceiling mounted and lifted. It is suitable for commercial lighting, household lighting and office lighting.

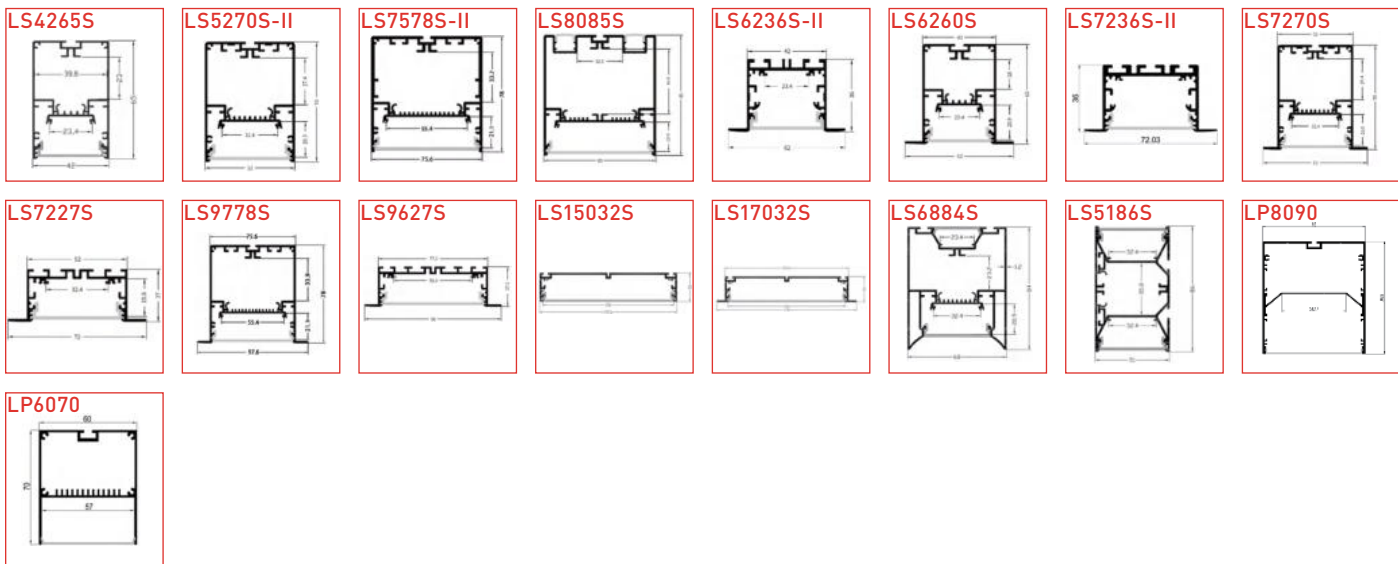

NEW LED PROFILE RANGE

NEW!


The most versatile of the range with multiple mounting and optical configurations. The recessed flange solution that allows for installation in non-drywall applications such as stone, tile, wood, and more.

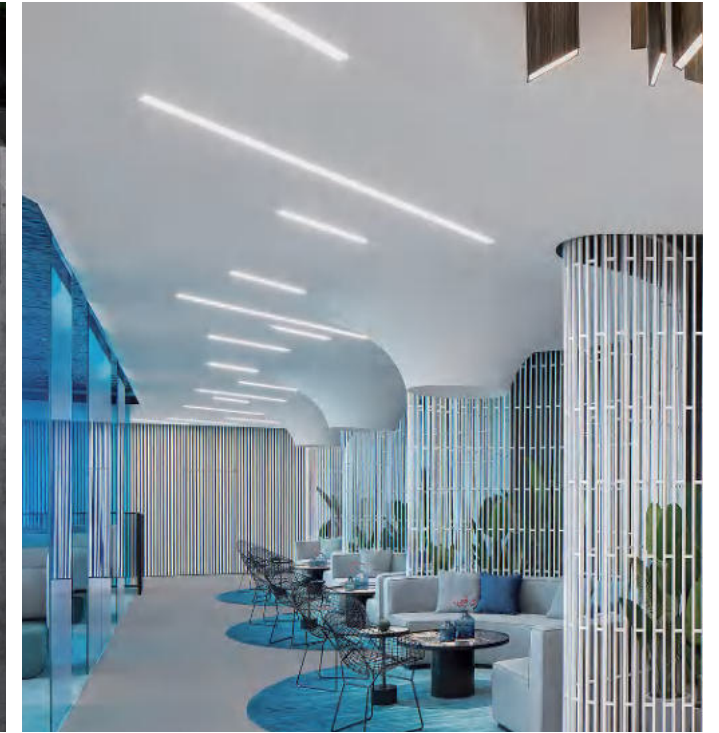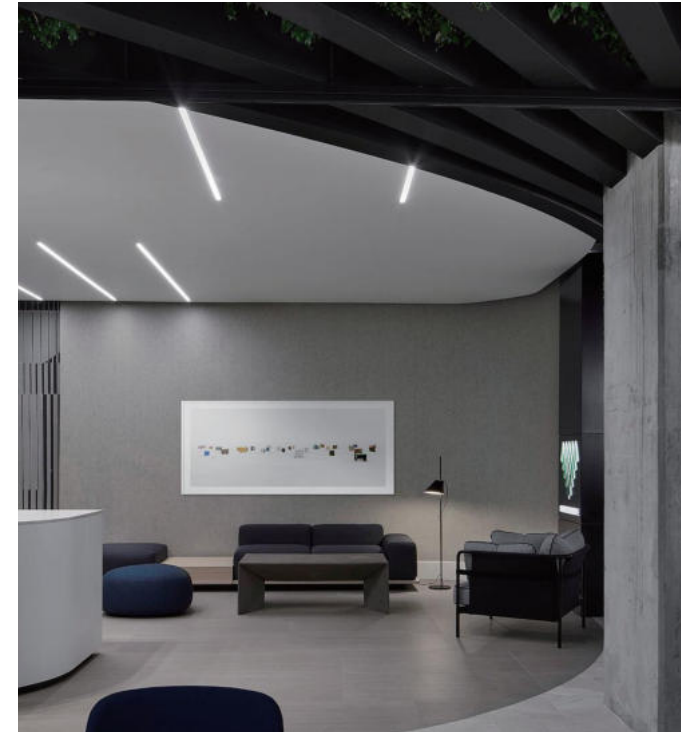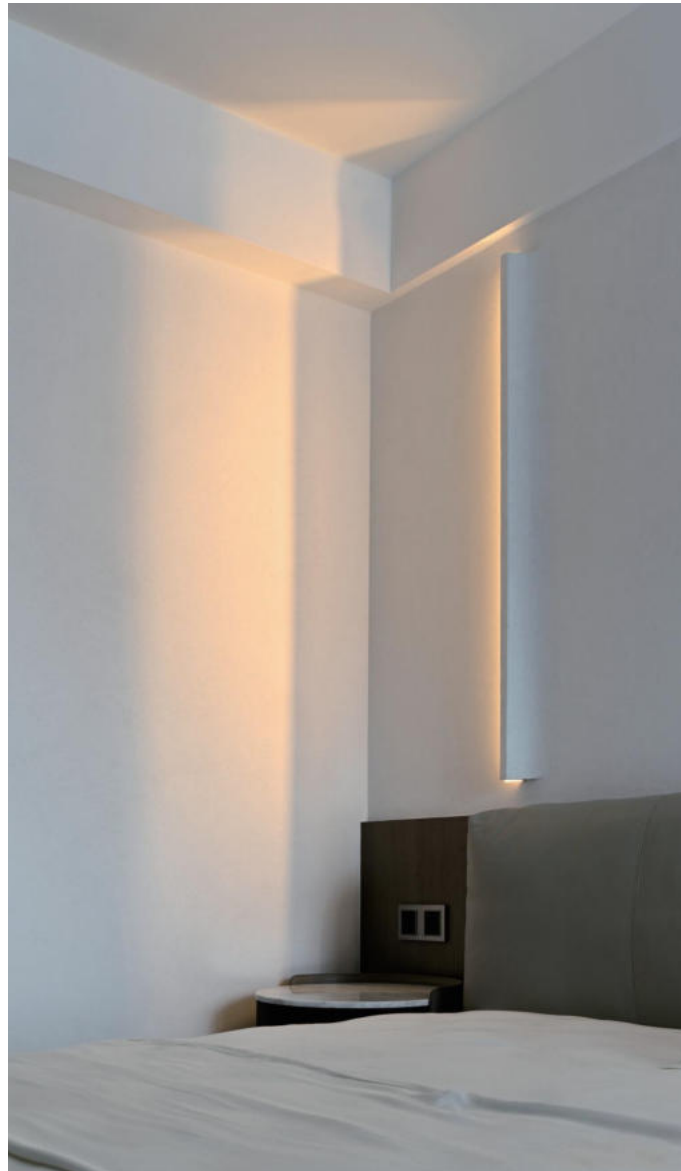


FINISH OPTIONS

LIGHT EFFECTS


The smallest of the range for surface mounted lighting solutions.

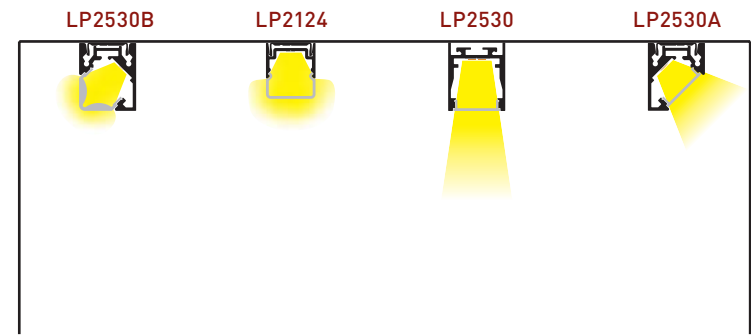


The most versatile of the range with multiple mounting and optical configurations.

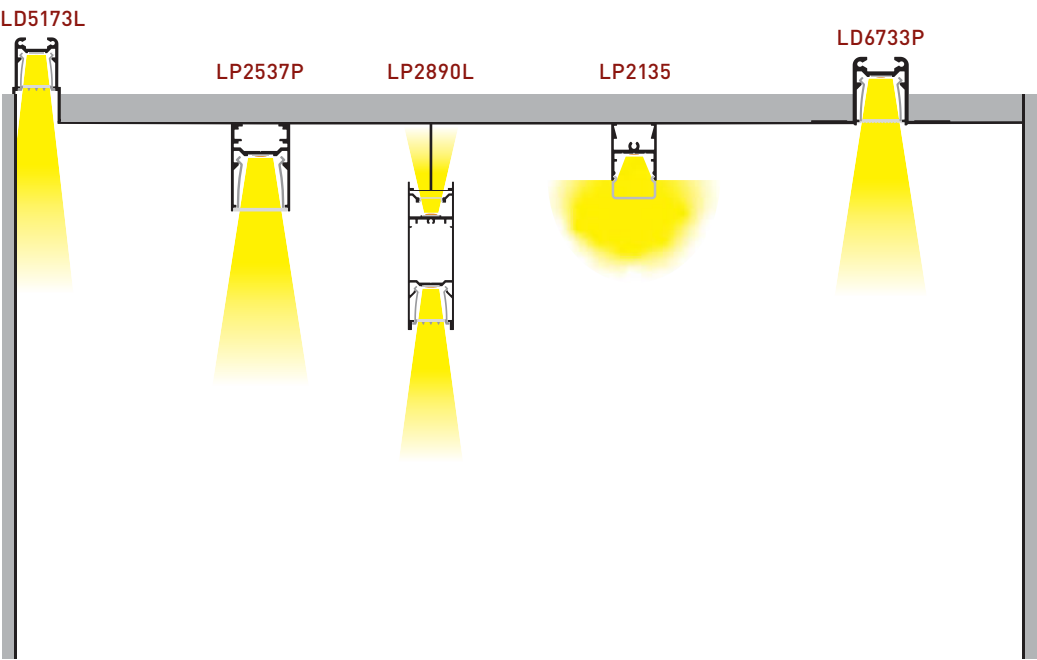


The recessed flange solution that allows for installation in non-drywall applications such as stone, tile, wood, and more.



LENS OPTIONS

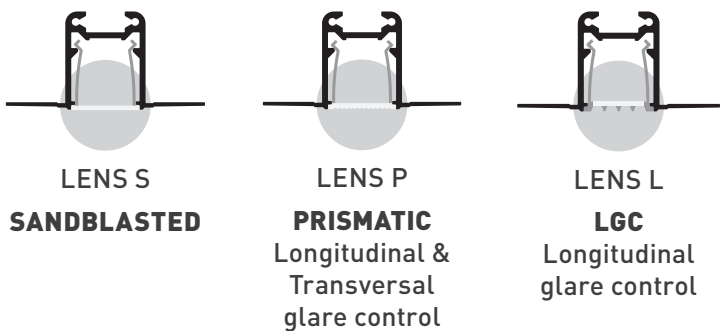

CO-EXTRUSION FOR HIGH EFFICIENCY

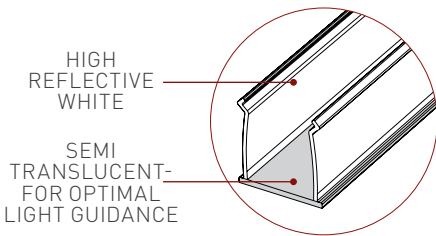

Model: LP2124




Three side lighting



SIZE

Unit:mm

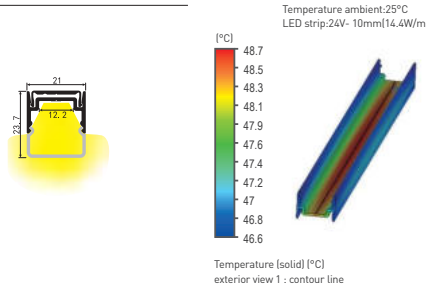


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted

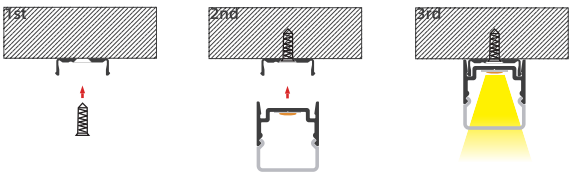

Accessory

Art-No.	Picture	Description	Material	Color
21352		Cover	PC	Transparent
21353		Cover	PC	Opal
21354		Cover	PC	Diffuser
2135B		Cover	PC	Black
21248		End cap(Hole)	PC	White
21249		End cap(W/O hole)	PC	White
21245		Fixing bar	aluminum	Silver



Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

Model: LP2135





Three side lighting



SIZE

Unit:mm




PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	18 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted

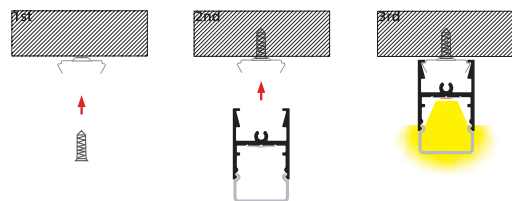

Accessory

Art-No.	Picture	Description	Material	Color
21352		Cover	PC	Transparent
21353		Cover	PC	Opal
21354		Cover	PC	Diffuser
2135B		Cover	PC	Black
21358		End cap(Hole)	PC	White
21359		End cap(W/O hole)	PC	White
21350		Clip	Stainless steel	Silver



Art-No	Picture
LSSS241027 SMD-24V-120-15mm	

Model: LP2530



SIZE

Unit:mm



PARAMETERS


Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	20 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

Accessory

Art-No.	Picture	Description	Material	Color
LP22222		Cover	PC	Transparent
LP22223		Cover	PC	Opal
LP22224		Cover	PC	Diffuser
LP2222B		Cover	PC	Black
25308		End cap(Hole)	PC	White
25309		End cap(W/O hole)	PC	White
25300		Clip	Stainless steel	Silver
LS5270SDZJ		Pendant kit	Stainless steel	Silver
LS5270SPJT		180° splicing strip	Stainless steel	silver
LS5270SPJLA		90° splicing strip (vertical)	Stainless steel	silver
LS5270SPJLB		90° splicing strip	Stainless steel	silver
LS5270SPJX		$30^{\circ} \leq \angle A \leq 150^{\circ}$	Stainless steel	silver
LS5270SPJLC		$30^{\circ} \leq \angle C \leq 270^{\circ}$	Stainless steel	silver
LS5270SPSD		$L(\text{vertical})$ $30^{\circ} \leq \angle C \leq 270^{\circ}$	Stainless steel	silver
LS5270SPJLJ		120° splicing strip	Stainless steel	silver
LS5270SPJLA		60° splicing strip	Stainless steel	silver
LS5270SPJJB		120° splicing strip	Stainless steel	silver


Art-No	Picture
LSSS241027 SMD-24V-120-15mm	

Model: LP2530A NEW!

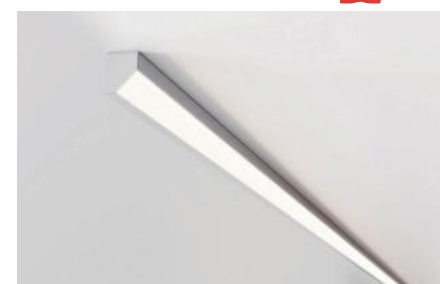

SIZE


Unit:mm

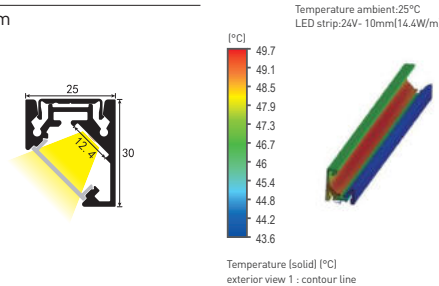

PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted

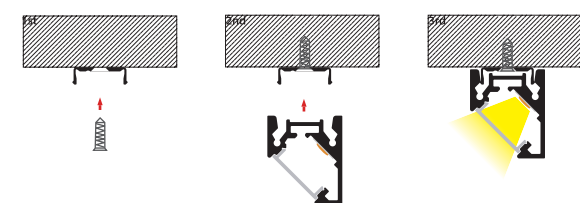


Accessory				
Art-No.	Picture	Description	Material	Color
LP22222		Cover	PC	Transparent
LP22223		Cover	PC	Opal
LP22224		Cover	PC	Diffuser
LP2222B		Cover	PC	Black
2530A8		End cap(Hole)	PC	White
2530A9		End cap(W/O hole)	PC	White
21245		Fixing bar	aluminum	Silver



Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

Model: LP2530B NEW!

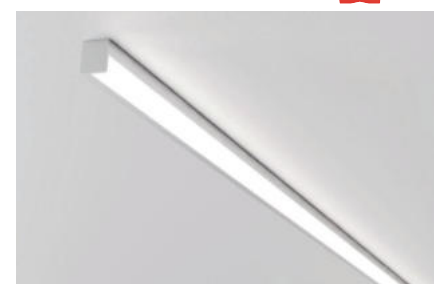


Optics lens



SIZE


Unit:mm

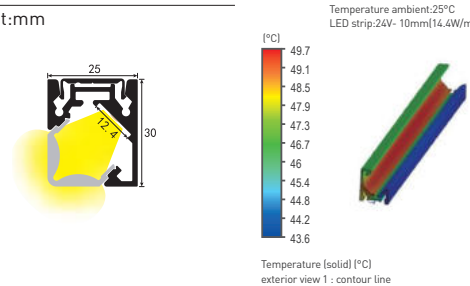


PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Transparent
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted

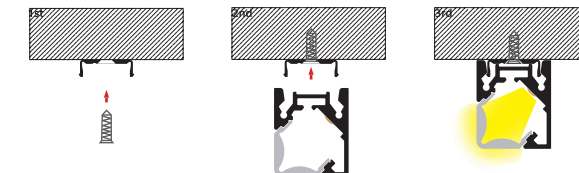


Accessory				
Art-No.	Picture	Description	Material	Color
2530B2		Cover	PC	Transparent
2530B8		End cap(Hole)	PC	White
2530B9		End cap(W/O hole)	PC	White
21245		Fixing bar	aluminum	Silver

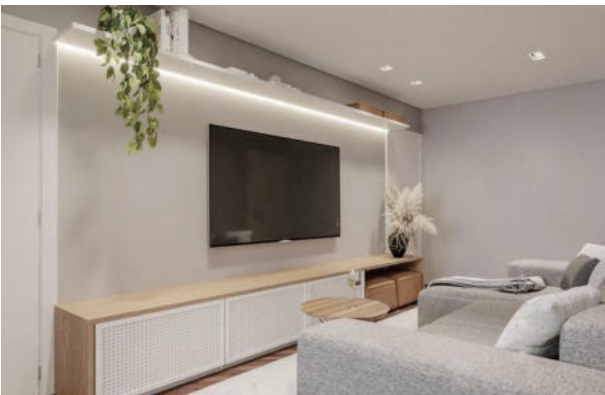

Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

Model: LP2537L NEW !

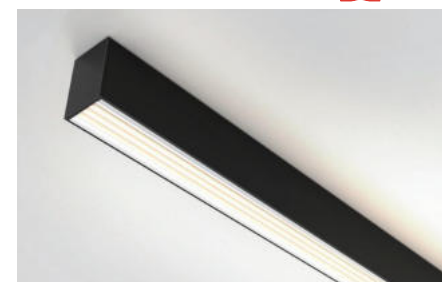


Unique dual-color cover



SIZE

Unit:mm

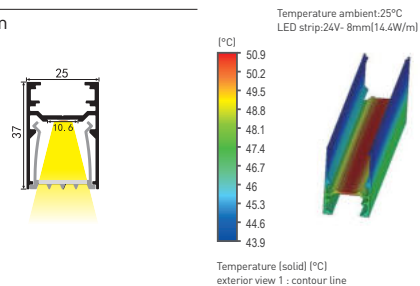


PARAMETERS


Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Surface mounted

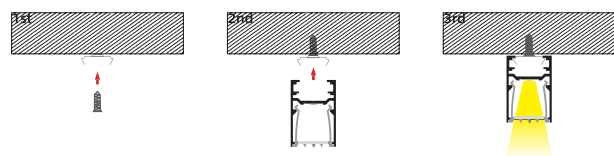


Accessory				
Art-No.	Picture	Description	Material	Color
5173L4		Cover	PC	Diffuser
2537L8		End cap(Hole)	PC	White
2537L9		End cap(W/O hole)	PC	White
2537L0		Clip	Stainless steel	Silver

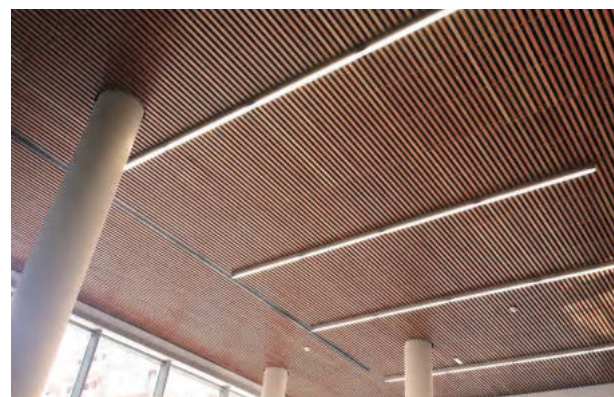

Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LP2537P NEW !

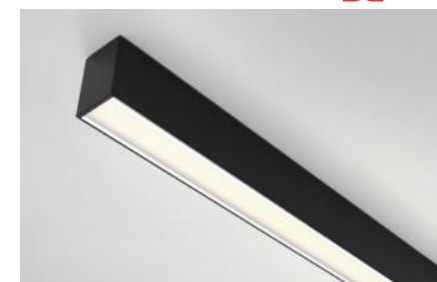


Unique dual-color cover



SIZE

Unit:mm

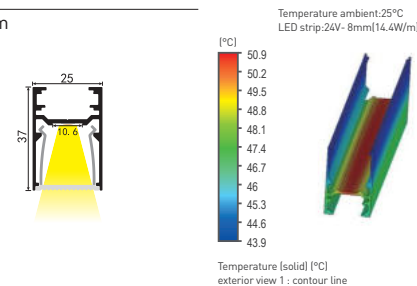


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Surface mounted

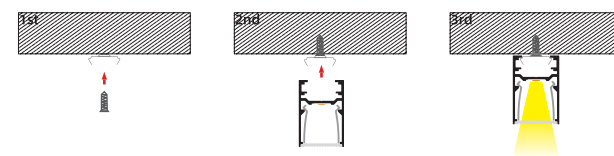


Accessory				
Art-No.	Picture	Description	Material	Color
5173P4		Cover	PC	Diffuser
2537L8		End cap(Hole)	PC	White
2537L9		End cap(W/O hole)	PC	White
2537L0		Clip	Stainless steel	Silver



Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LP2537S NEW !

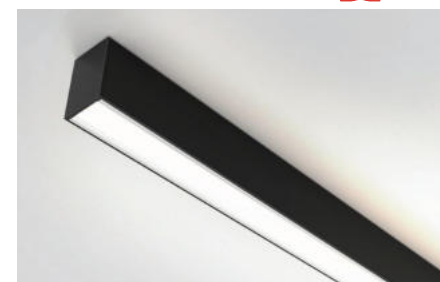


Unique dual-color cover



SIZE

Unit:mm

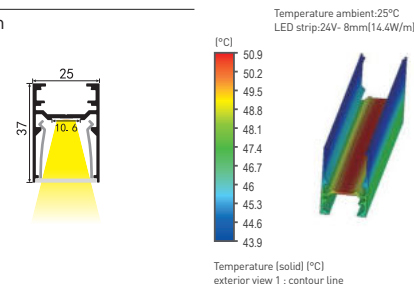


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Surface mounted

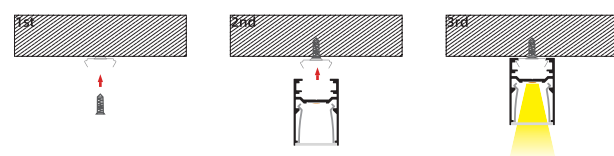

Accessory

Art-No.	Picture	Description	Material	Color
5173S4		Cover	PC	Diffuser
2537L8		End cap(Hole)	PC	White
2537L9		End cap(W/O hole)	PC	White
2537L0		Clip	Stainless steel	Silver



Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LP2890L NEW !




Up&down lighting
Unique dual-color cover



SIZE

Unit:mm


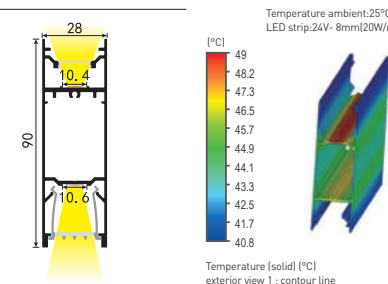


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser / Transparent/Opal
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)*2pcs
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Pendant

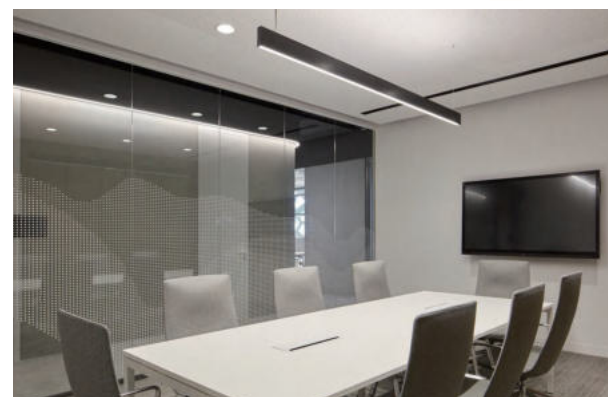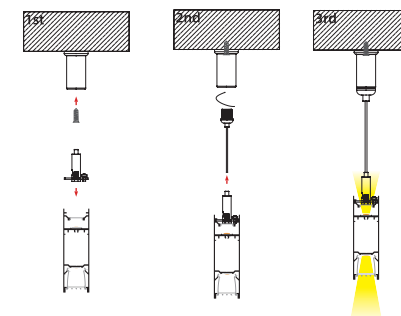


Accessory


Art-No.	Picture	Description	Material	Color
5173L4		Cover	PC	Diffuser
LP1610B2		Cover	PC	Transparent
LP1610B3		Cover	PC	Opal
LP1610B4		Cover	PC	Diffuser
2890L8		End cap(Hole)	PC	White
2890L9		End cap(W/O hole)	PC	White
LP2890LH		Pendant kit	Stainless steel	Silver

Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LP2890P

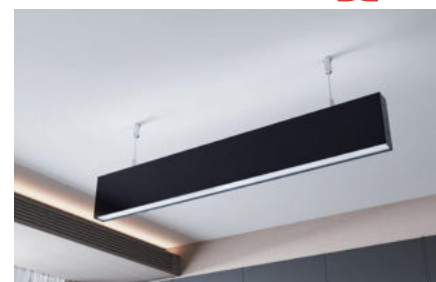


Up&down lighting
Unique dual-color cover

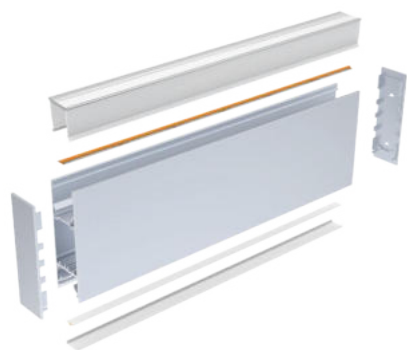

SIZE



Unit:mm

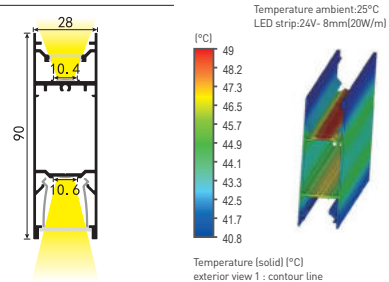

PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)*2pcs
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Pendant

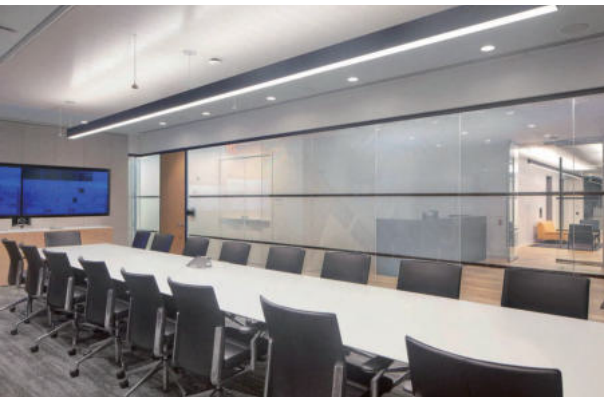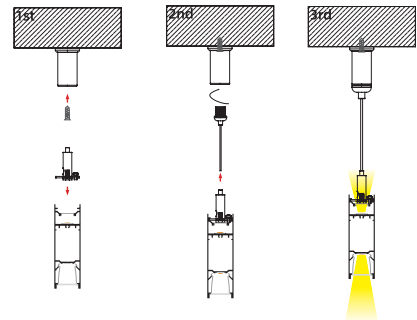

Accessory				
Art-No.	Picture	Description	Material	Color
5173P4		Cover	PC	Diffuser
LP1610B2		Cover	PC	Transparent
LP1610B3		Cover	PC	Opal
LP1610B4		Cover	PC	Diffuser
2890L8		End cap(Hole)	PC	White
2890L9		End cap(W/O hole)	PC	White
LP2890LH		Pendant kit	Stainless steel	Silver

Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LP2890S




Up&down lighting
Unique dual-color cover



SIZE


Unit:mm

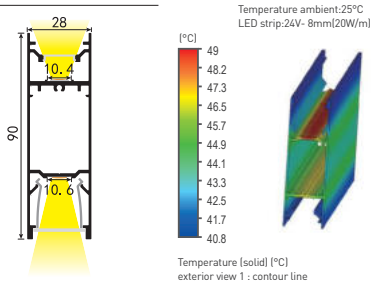

PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)*2pcs
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Pendant

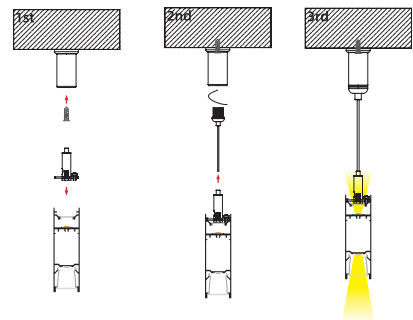


Accessory				
Art-No.	Picture	Description	Material	Color
5173S4		Cover	PC	Diffuser
LP1610B2		Cover	PC	Transparent
LP1610B3		Cover	PC	Opal
LP1610B4		Cover	PC	Diffuser
2890L8		End cap(Hole)	PC	White
2890L9		End cap(W/O hole)	PC	White
2890LH		Pendant kit	Stainless steel	Silver

Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LD4529 NEW!




The recessed flange solution that allows for installation in non-drywall applications such as stone, tile, wood, and more.

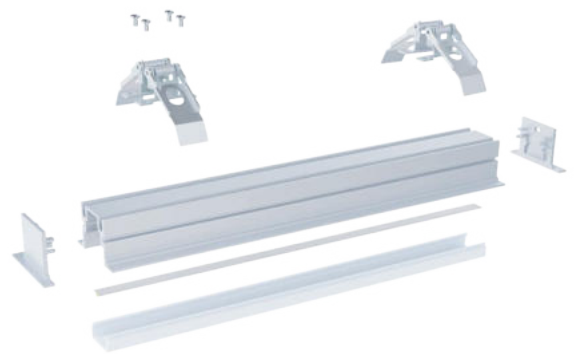

SIZE

Unit:mm

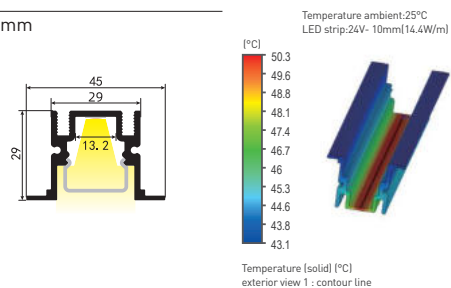


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	13 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Recessed

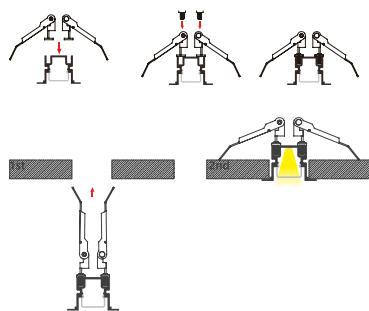


Accessory				
Art-No.	Picture	Description	Material	Color
21352		Cover	PC	Transparent
21353		Cover	PC	Opal
21354		Cover	PC	Diffuser
2135B		Cover	PC	Black
LSXXXXSHEQ		Butterfly clip	Stainless steel	silver
45298		End cap(Hole)	PC	White
45299		End cap(W/O hole)	PC	White
ACC-2PIN-10MM-X		Mini strip connector	PC	Transparent
ACC-COB-4PIN-10MM-X		Mini strip connector	PC	Transparent
ACC-SMD-2PIN-10MM-X		Mini strip connector	PC	Transparent
ACC-SMD-3PIN-10MM-X		Mini strip connector	PC	Transparent
ACC-SMD-4PIN-10MM-X		Mini strip connector	PC	Transparent

Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

Model: LD5173L NEW!




Ceiling LED lighting
Unique dual-color cover

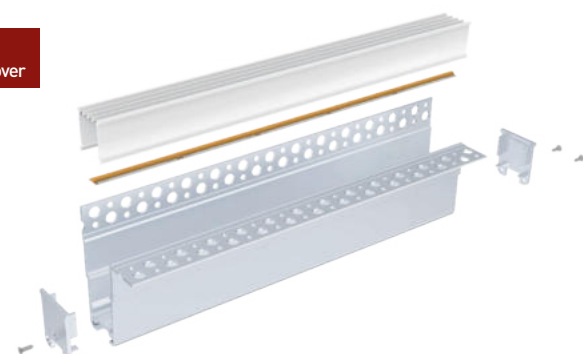

SIZE

Unit:mm

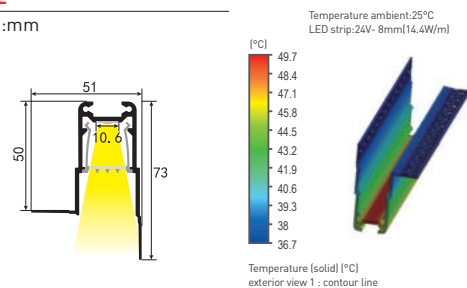


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Recessed

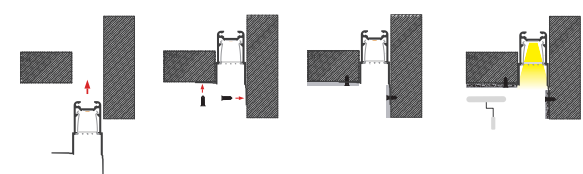


Accessory				
Art-No.	Picture	Description	Material	Color
5173L4		Cover	PC	Diffuser
5173S8		End cap(Hole)	PC	White
5173S9		End cap(W/O hole)	PC	White

Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LD5173P




Ceiling LED lighting
Unique dual-color cover

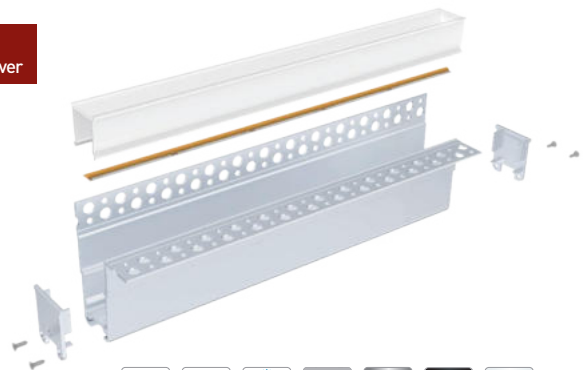

SIZE


Unit:mm

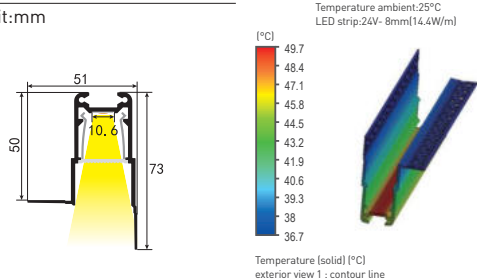


PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Recessed

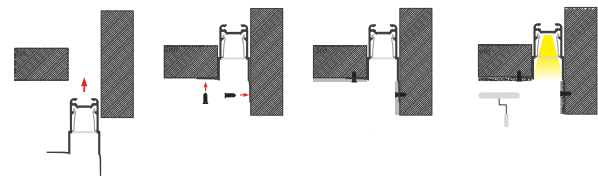

Accessory				
Art-No.	Picture	Description	Material	Color
5173P4		Cover	PC	Diffuser
5173S8		End cap(Hole)	PC	White
5173S9		End cap(W/O hole)	PC	White

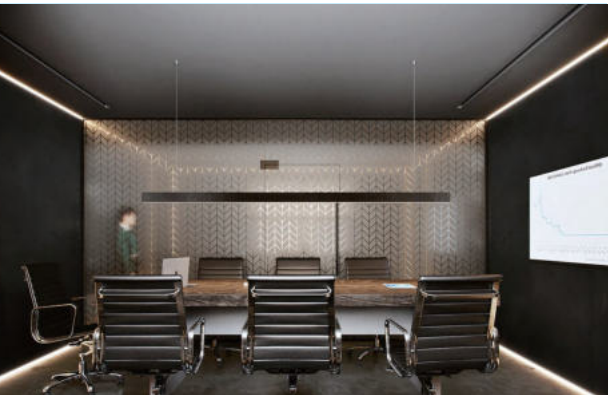


Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LD5173S




Ceiling LED lighting
Unique dual-color cover

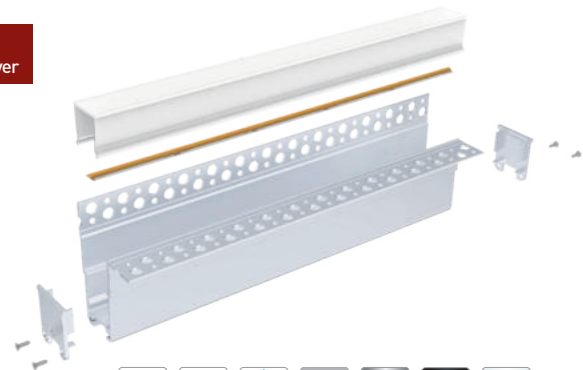

SIZE


Unit:mm

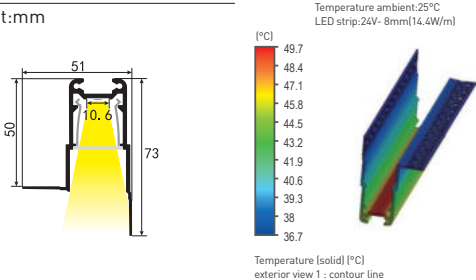


PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Recessed

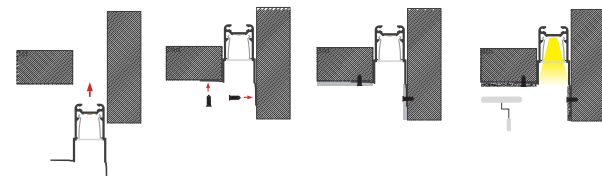


Accessory				
Art-No.	Picture	Description	Material	Color
5173S4		Cover	PC	Diffuser
5173S8		End cap(Hole)	PC	White
5173S9		End cap(W/O hole)	PC	White

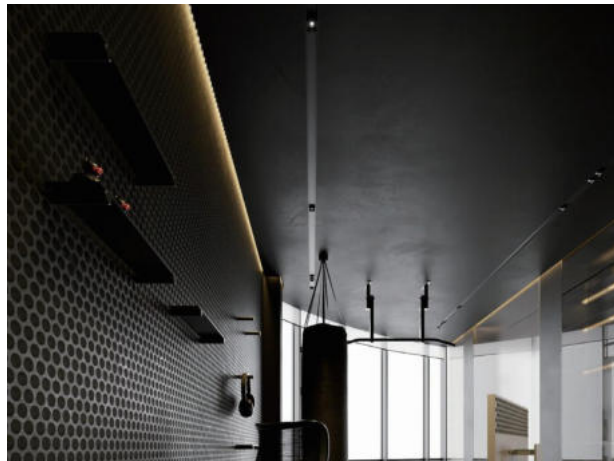


Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LD6733L NEW !

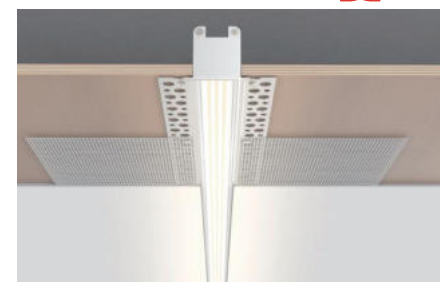


Ceiling LED lighting
Unique dual-color cover

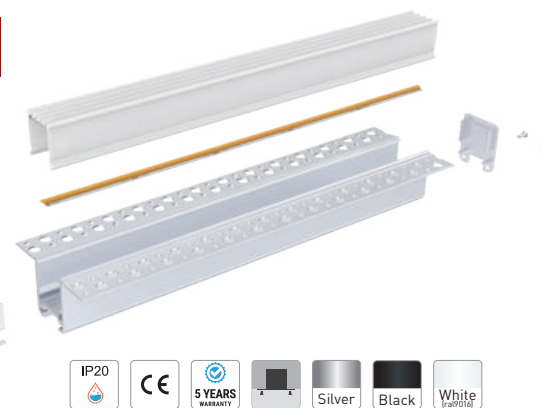

SIZE

Unit:mm

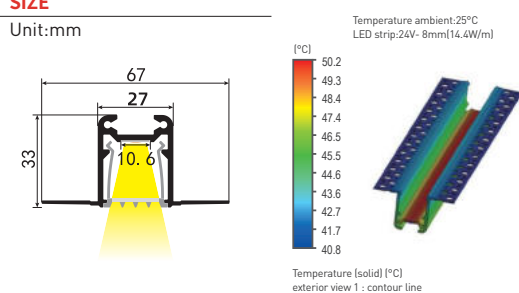


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting


INSTALLATION

Recessed

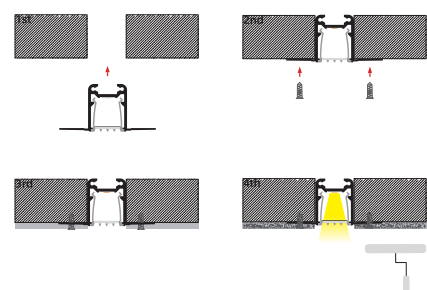


Accessory

Art-No.	Picture	Description	Material	Color
5173L4		Cover	PC	Diffuser
6733L8		End cap(Hole)	PC	White
6733L9		End cap(W/O hole)	PC	White

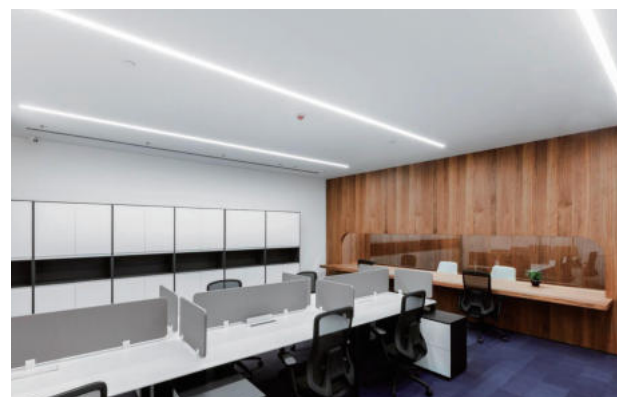


Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LD6733P NEW !

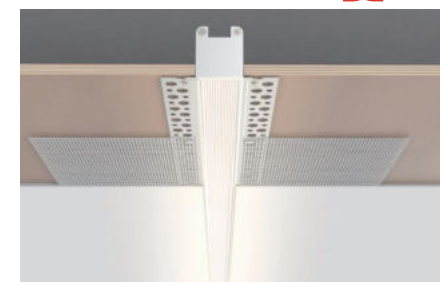


Ceiling LED lighting
Unique dual-color cover

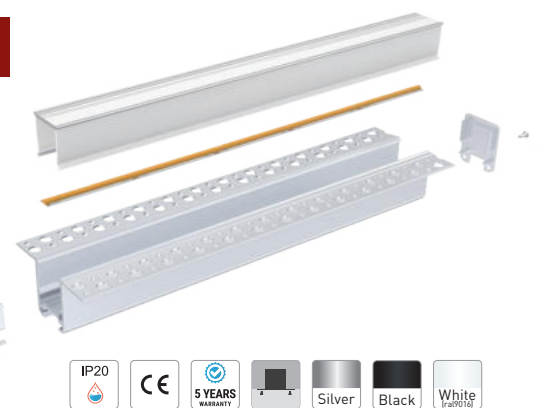

SIZE

Unit:mm

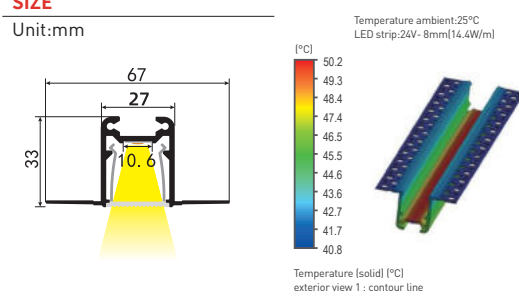


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Recessed

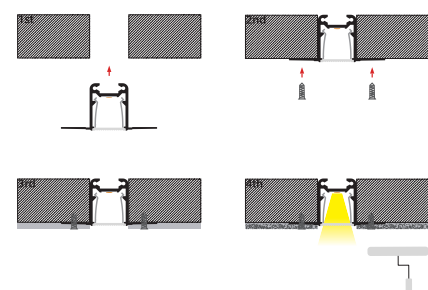

Accessory

Art-No.	Picture	Description	Material	Color
5173P4		Cover	PC	Diffuser
6733L8		End cap(Hole)	PC	White
6733L9		End cap(W/O hole)	PC	White



Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LD6733S NEW !




Ceiling LED lighting
Unique dual-color cover



SIZE

Unit:mm

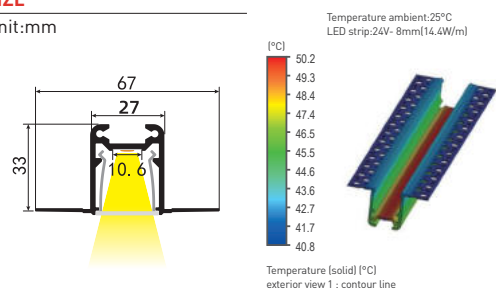


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Recessed

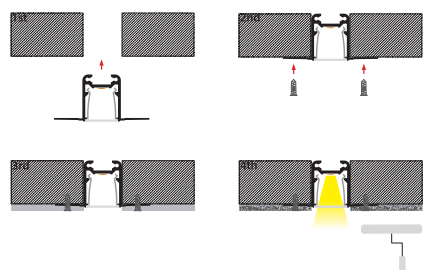

Accessory

Art-No.	Picture	Description	Material	Color
5173S4		Cover	PC	Diffuser
6733L8		End cap(Hole)	PC	White
6733L9		End cap(W/O hole)	PC	White



Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	

Model: LD2350 NEW !




Ceiling LED lighting



SIZE

Unit:mm

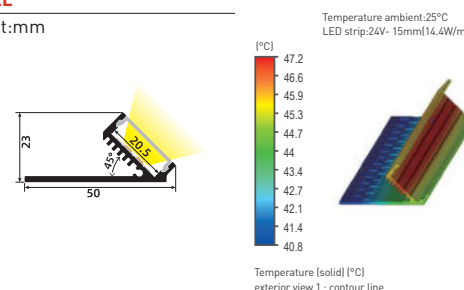


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser / Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	20 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Surface mounted

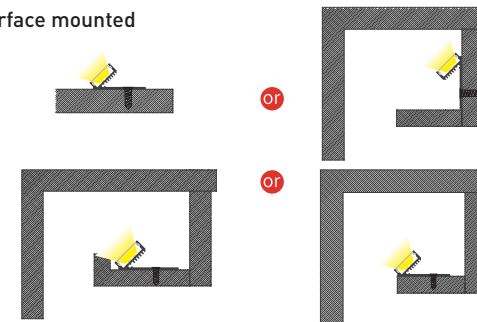

Accessory

Art-No.	Picture	Description	Material	Color
LP2525F2		Cover	PC	Transparent
LP2525F3		Cover	PC	Opal
LP2525F4		Cover	PC	Diffuser
LP2525FB		Cover	PC	Black
23508		End cap(Hole)	PC	White
23509		End cap(W/O hole)	PC	White




Art-No	Picture
LSSS241027 SMD-24V-120-15mm	

Model: LD2355




Up&down lighting
Ceiling LED lighting

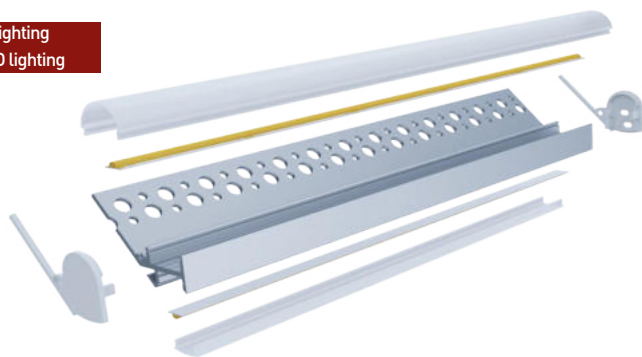

SIZE

Unit:mm


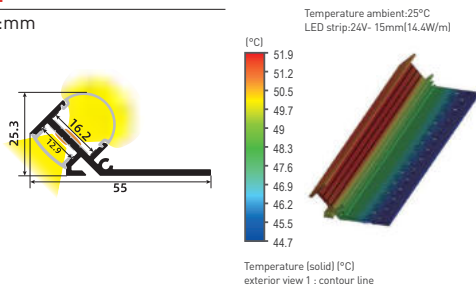


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm/16mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Surface mounted

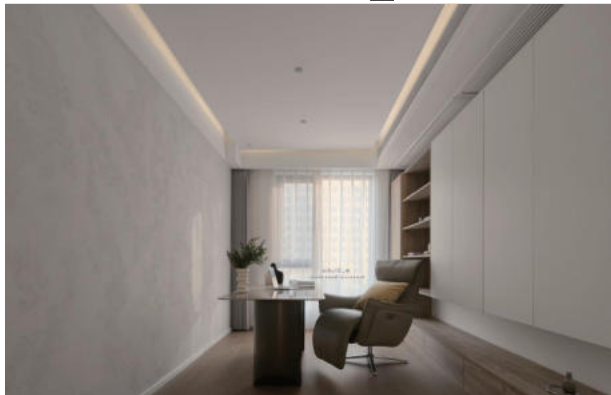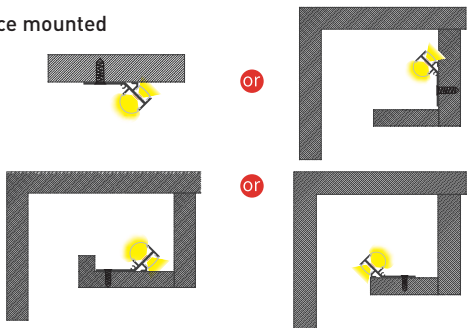


Accessory				
Art-No.	Picture	Description	Material	Color
LG1913C2		Cover	PC	Transparent
LG1913C3		Cover	PC	Opal
LG1913C4		Cover	PC	Diffuser
LG1913CB		Cover	PC	Black
LP17072		Cover	PC	Transparent
LP17073		Cover	PC	Opal
LP17074		Cover	PC	Diffuser
LP1707B		Cover	PC	Black
23558		End cap(Hole)	PC	White
23559		End cap(W/O hole)	PC	White

Art-No	Picture
LSSC241030 COB-24V-320-12mm	
LSSS241027 SMD-24V-120-12mm	

Model: LD2355B




Up&down lighting
Ceiling LED lighting

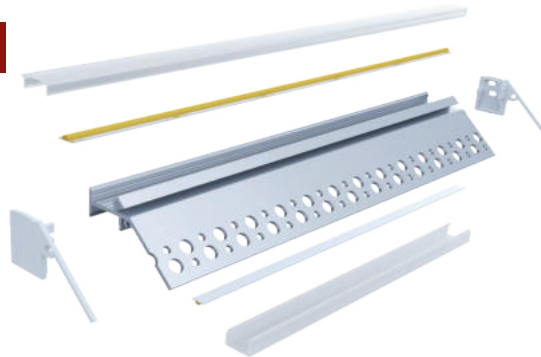

SIZE

Unit:mm

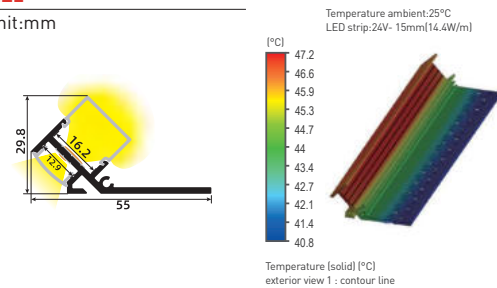


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm/16mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION


Surface mounted

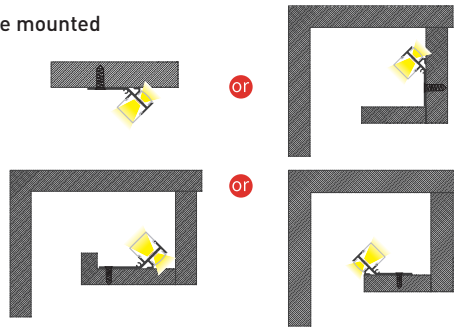

Accessory				
Art-No.	Picture	Description	Material	Color
LG1913D2		Cover	PC	Transparent
LG1913D3		Cover	PC	Opal
LG1913D4		Cover	PC	Diffuser
LG1913DB		Cover	PC	Black
LP17072		Cover	PC	Transparent
LP17073		Cover	PC	Opal
LP17074		Cover	PC	Diffuser
LP1707B		Cover	PC	Black
2355B8		End cap(Hole)	PC	White
2355B9		End cap(W/O hole)	PC	White

Art-No	Picture
LSSC241030 COB-24V-320-12mm	
LSSS241027 SMD-24V-120-12mm	

Model: LD2355C NEW !

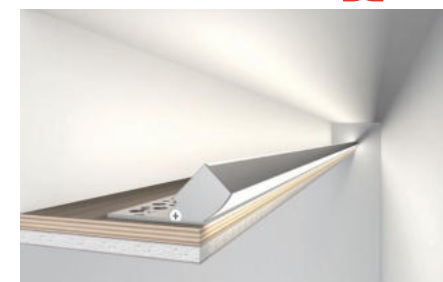


Up&down lighting
Ceiling LED lighting



SIZE

Unit:mm

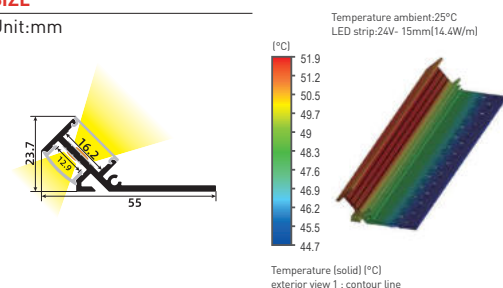


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm/16mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting


INSTALLATION

Surface mounted

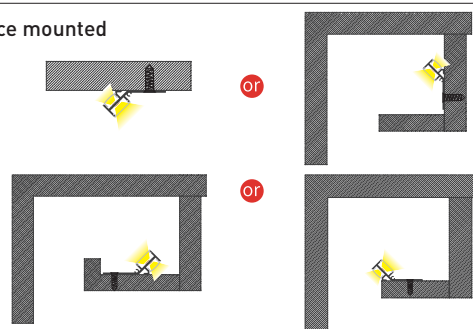

Accessory				
Art-No.	Picture	Description	Material	Color
LG19132		Cover	PC	Transparent
LG19133		Cover	PC	Opal
LG19134		Cover	PC	Diffuser
LG1913B		Cover	PC	Black
LP17072		Cover	PC	Transparent
LP17073		Cover	PC	Opal
LP17074		Cover	PC	Diffuser
LP1707B		Cover	PC	Black
2355C8		End cap(Hole)	PC	White
2355C9		End cap(W/O hole)	PC	White

Art-No	Picture
LSSC241030 COB-24V-320-12mm	
LSSS241027 SMD-24V-120-12mm	

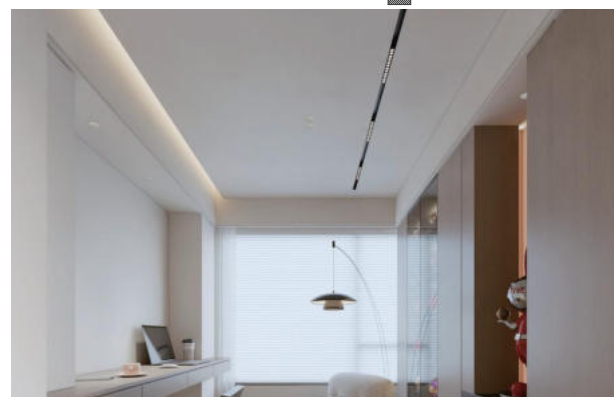

Model: LD2490 NEW !




Wall LED lighting



SIZE

Unit:mm

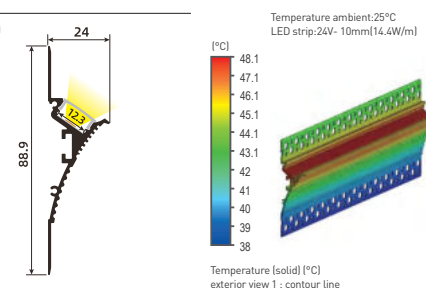


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting


INSTALLATION

Recessed

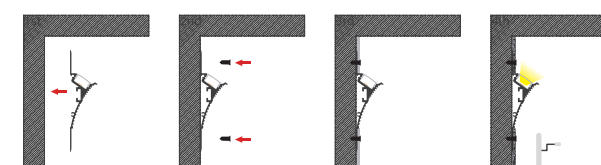

Accessory				
Art-No.	Picture	Description	Material	Color
LP1707D2		Cover	PC	Transparent
LP1707D3		Cover	PC	Opal
LP1707D4		Cover	PC	Diffuser
LP1707DB		Cover	PC	Black
LS5270SPJT		180° splicing strip	Stainless steel	silver
LS5270SPJLA		90° splicing strip (vertical)	Stainless steel	silver
LS5270SPJLB		90° splicing strip	Stainless steel	silver
LS5270SPJJB		120° splicing strip (vertical)	Stainless steel	silver
24908		End cap(Hole)	PC	White
24909		End cap(W/O hole)	PC	White

Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

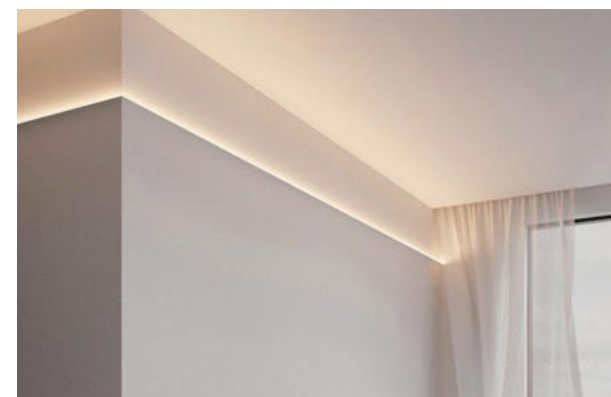

Model: LD3850




Wall LED lighting



SIZE

Unit:mm

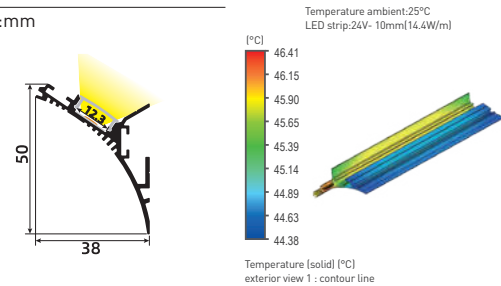


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting


INSTALLATION

Surface mounted

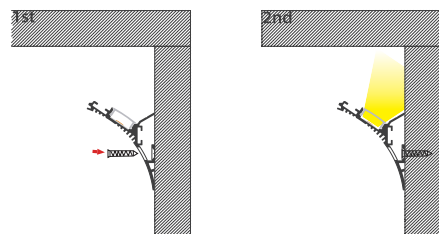

Accessory				
Art-No.	Picture	Description	Material	Color
LP1707D2		Cover	PC	Transparent
LP1707D3		Cover	PC	Opal
LP1707D4		Cover	PC	Diffuser
LP1707DB		Cover	PC	Black
6214 - 180°		Straight connector	Stainless steel	silver
6214 - 90°-1		90° Vertical Connector	Stainless steel	silver
6214 - 90° -2		90° Connector	Stainless steel	silver
38508		End cap(Hole)	PC	White
38509		End cap(W/O hole)	PC	White

Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

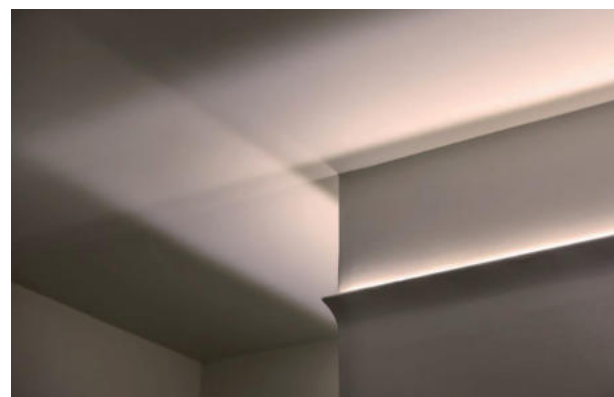

Model: LD5045




Ceiling LED lighting



SIZE

Unit:mm

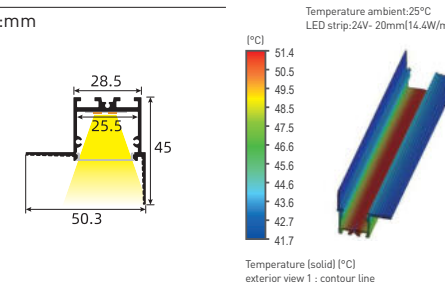


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 240LEDs/m(SMD2835)
Lighting source width:	25 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

INSTALLATION

Recessed




Accessory

Art-No.	Picture	Description	Material	Color
2609B2		Cover	PC	Transparent
2609B3		Cover	PC	Opal
2609B4		Cover	PC	Diffuser
2609BB		Cover	PC	Black
50458		End cap(Hole)	PC	White
50459		End cap(W/O hole)	PC	White

Art-No	Picture
LSSS241027 SMD-24V-240-20mm	



Model: LD5814

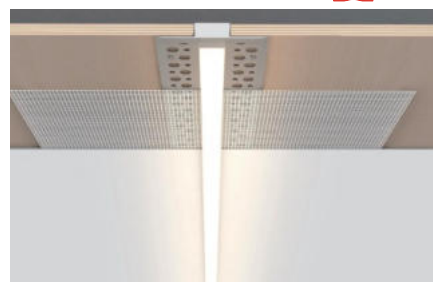


Ceiling LED lighting



SIZE

Unit:mm

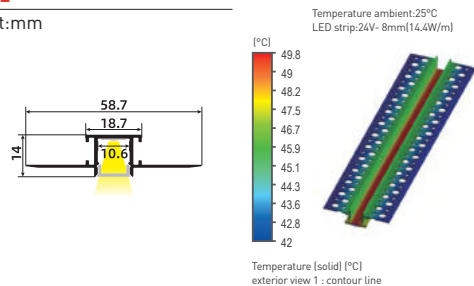

PARAMETERS


Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	7.2W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	10 mm(max.)
Available lengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

Accessory

Art-No.	Picture	Description	Material	Color
LD54142		Cover	PC	Transparent
LD54143		Cover	PC	Opal
LD54144		Cover	PC	Diffuser
LD5414B		Cover	PC	Black
6214 - 180°		Straight connector	Stainless steel	silver
6214 - 90°-1		90° Vertical Connector	Stainless steel	silver
6214 - 90° -2		90° Connector	Stainless steel	silver
58148		End cap(Hole)	PC	White
58149		End cap(W/O hole)	PC	White
ACC-2PIN-8MM-X		Mini strip connector	PC	Transparent

INSTALLATION

Recessed

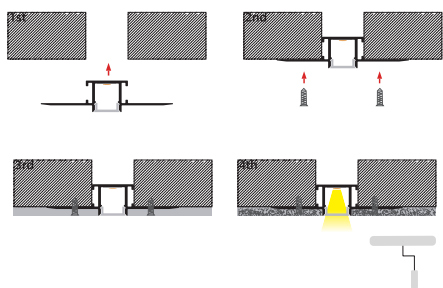

Art-No	Picture
LSSC241030 COB-24V-320-8mm	
LSSS241027 SMD-24V-120-8mm	





NEW "FISH" SERIES PROFILE

The cross section of cover is various, similar to the shape of fish tail, fish head, fish fin, fish belly and so on.




Model: LP4315A NEW!

Optics lens
Beam Angle 40°



LIGHT DISTRIBUTION AND HEAT DISSIPATION DIAGRAMS

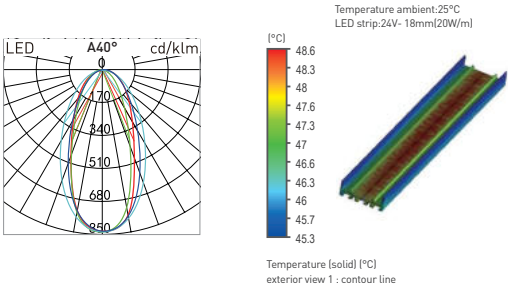


PARAMETERS


Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	21 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted



Pendant

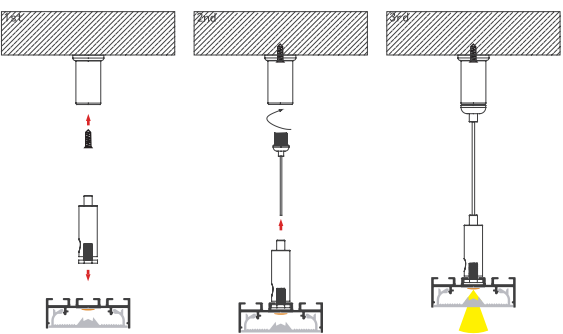

Accessory


Art-No.	Picture	Description	Material	Color
LP4315A2		Cover	PC	Transparent
LP4315A8		End cap(Hole)	PC	White
LP4315A9		End cap(W/O hole)	PC	White
LS5270SPJBM		Surface mounted clip	Stainless steel	Silver
LS5270SDZJ		Pendant kit	Stainless steel	Silver
LS5270SPJT		180° splicing strip	Stainless steel	silver
LS5270SPJLB		90° splicing strip	Stainless steel	silver
LS5270SPJX		30° splicing strip	Stainless steel	silver
LS5270SPJLC		30° splicing strip	Stainless steel	silver
LS5270SPJLJ		120° splicing strip	Stainless steel	silver
LS5270SPJY		30° splicing strip	Stainless steel	silver

Art-No	Picture
LSSC241030 COB-24V-320-12mm	
LSSS241027 SMD-24V-120-12mm	


Model: LP4315B



Optics lens
Beam Angle 60°




LIGHT DISTRIBUTION AND HEAT DISSIPATION DIAGRAMS

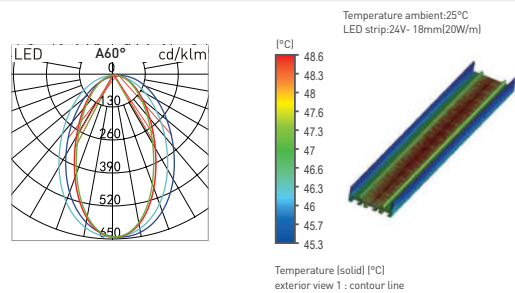


PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	21 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted



Pendant

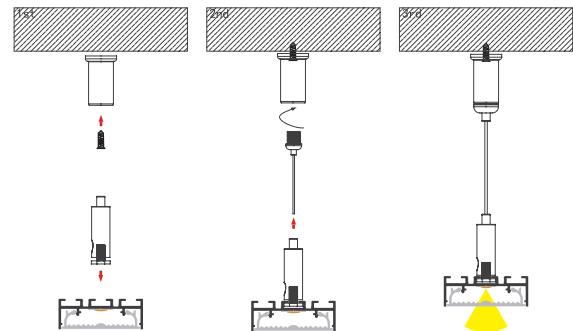


Accessory				
Art-No.	Picture	Description	Material	Color
LP4315B4		Cover	PC	Transparent
LP4315A8		End cap(Hole)	PC	White
LP4315A9		End cap(W/O hole)	PC	White
LS5270SPJBM		Surface mounted clip	Stainless steel	Silver
LS5270SDZJ		Pendant kit	Stainless steel	Silver
LS5270SPJT		180° splicing strip	Stainless steel	silver
LS5270SPJLB		90° splicing strip	Stainless steel	silver
LS5270SPJX		$30^{\circ} \leq \angle A \leq 150^{\circ}$	Stainless steel	silver
LS5270SPJLC		$30^{\circ} \leq \angle C \leq 270^{\circ}$	Stainless steel	silver
LS5270SPJLJ		120° splicing strip	Stainless steel	silver
LS5270SPJY		$30^{\circ} \leq \angle B \leq 150^{\circ}$	Stainless steel	silver

Art-No	Picture
LSSC241030 COB-24V-320-12mm	
LSSS241027 SMD-24V-120-12mm	


Model: LP4315C



Optics lens
Beam Angle 90°




LIGHT DISTRIBUTION AND HEAT DISSIPATION DIAGRAMS

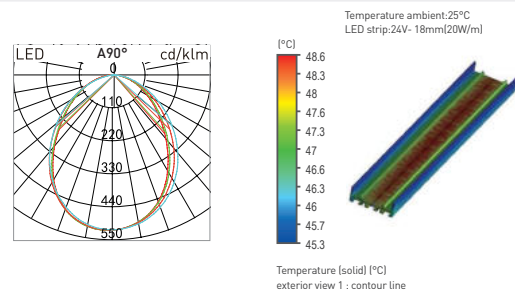


PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	21 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted




Pendant

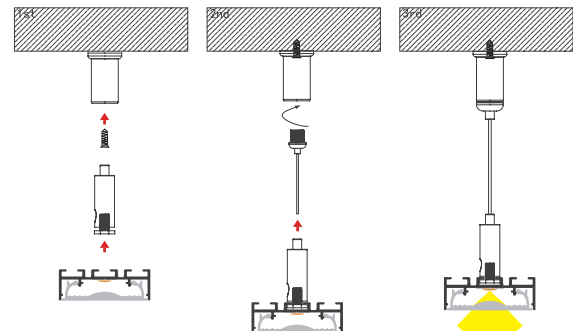


Accessory				
Art-No.	Picture	Description	Material	Color
LP4315C4		Cover	PC	Transparent
LP4315A8		End cap(Hole)	PC	White
LP4315A9		End cap(W/O hole)	PC	White
LS5270SPJBM		Surface mounted clip	Stainless steel	Silver
LS5270SDZJ		Pendant kit	Stainless steel	Silver
LS5270SPJT		180° splicing strip	Stainless steel	silver
LS5270SPJLB		90° splicing strip	Stainless steel	silver
LS5270SPJX		$30^{\circ} \leq \angle A \leq 150^{\circ}$	Stainless steel	silver
LS5270SPJLC		$30^{\circ} \leq \angle C \leq 270^{\circ}$	Stainless steel	silver
LS5270SPJLJ		120° splicing strip	Stainless steel	silver
LS5270SPJY		$30^{\circ} \leq \angle B \leq 150^{\circ}$	Stainless steel	silver

Art-No	Picture
LSSC241030 COB-24V-320-12mm	
LSSS241027 SMD-24V-120-12mm	

Model: LP4315D

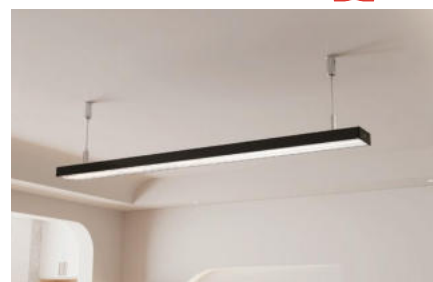


Optics lens
Single polarized lens 30°



Unit:mm




LIGHT DISTRIBUTION AND HEAT DISSIPATION DIAGRAMS

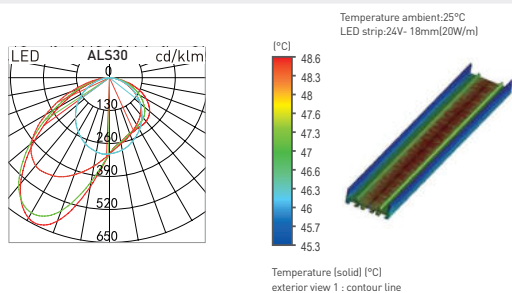


PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	21 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted




Pendant

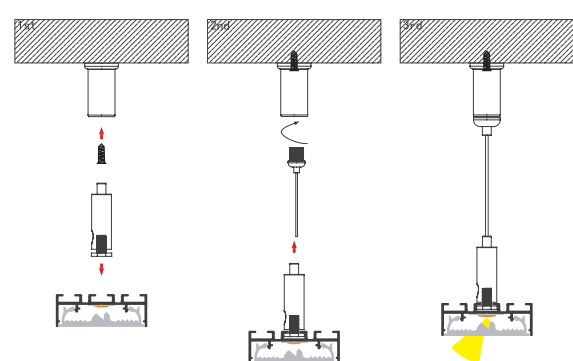


Accessory				
Art-No.	Picture	Description	Material	Color
LP4315D4		Cover	PC	Transparent
LP4315A8		End cap(Hole)	PC	White
LP4315A9		End cap(W/O hole)	PC	White
LS5270SPJBM		Surface mounted clip	Stainless steel	Silver
LS5270SDZJ		Pendant kit	Stainless steel	Silver
LS5270SPJT		180° splicing strip	Stainless steel	silver
LS5270SPJLB		90° splicing strip	Stainless steel	silver
LS5270SPJX		30° splicing strip	Stainless steel	silver
LS5270SPJLC		30° splicing strip	Stainless steel	silver
LS5270SPJLJ		120° splicing strip	Stainless steel	silver
LS5270SPJY		30° splicing strip	Stainless steel	silver

Art-No	Picture
LSSC241030 COB-24V-320-12mm	
LSSS241027 SMD-24V-120-12mm	

Model: LP4315E

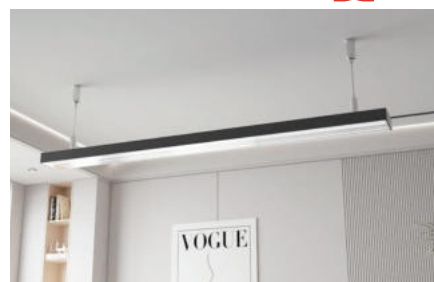


Optics lens
Double polarized lens 30°



Unit:mm




LIGHT DISTRIBUTION AND HEAT DISSIPATION DIAGRAMS

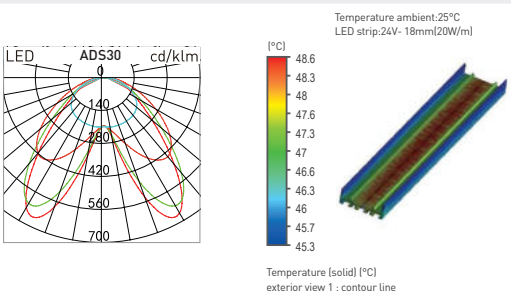


PARAMETERS	
Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser
Power:	20W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	21 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted



Pendant

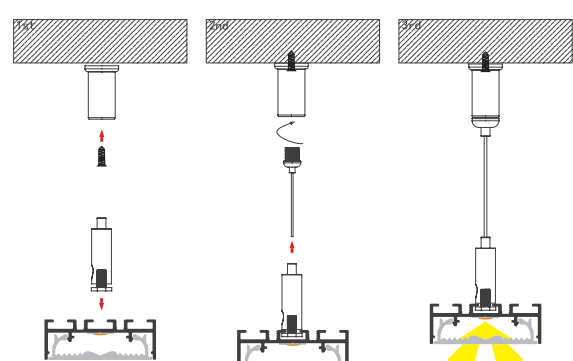



Accessory				
Art-No.	Picture	Description	Material	Color
LP4315E4		Cover	PC	Transparent
LP4315A8		End cap(Hole)	PC	White
LP4315A9		End cap(W/O hole)	PC	White
LS5270SPJBM		Surface mounted clip	Stainless steel	Silver
LS5270SDZJ		Pendant kit	Stainless steel	Silver
LS5270SPJT		180° splicing strip	Stainless steel	silver
LS5270SPJLB		90° splicing strip	Stainless steel	silver
LS5270SPJX		30° splicing strip	Stainless steel	silver
LS5270SPJLC		30° splicing strip	Stainless steel	silver
LS5270SPJLJ		120° splicing strip	Stainless steel	silver
LS5270SPJY		30° splicing strip	Stainless steel	silver

Art-No	Picture
LSSC241030 COB-24V-320-12mm	
LSSS241027 SMD-24V-120-12mm	

NEW REGULAR LED PROFILE SERIES

NEW !

The main characteristics of regular series products: small-sized, auxiliary lighting. Suitable for cabinet, wine cabinet, wardrobe, shelf, furniture, jewelry counter, etc.

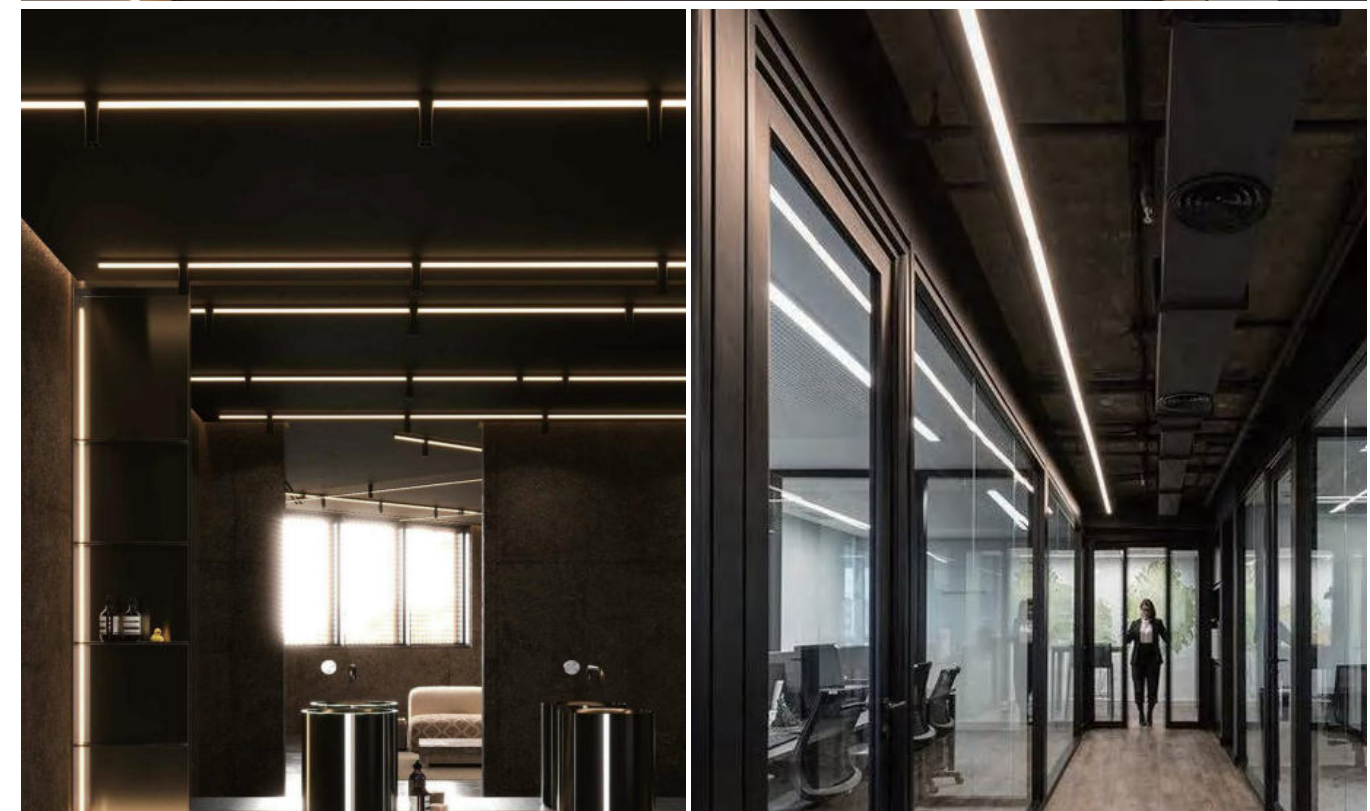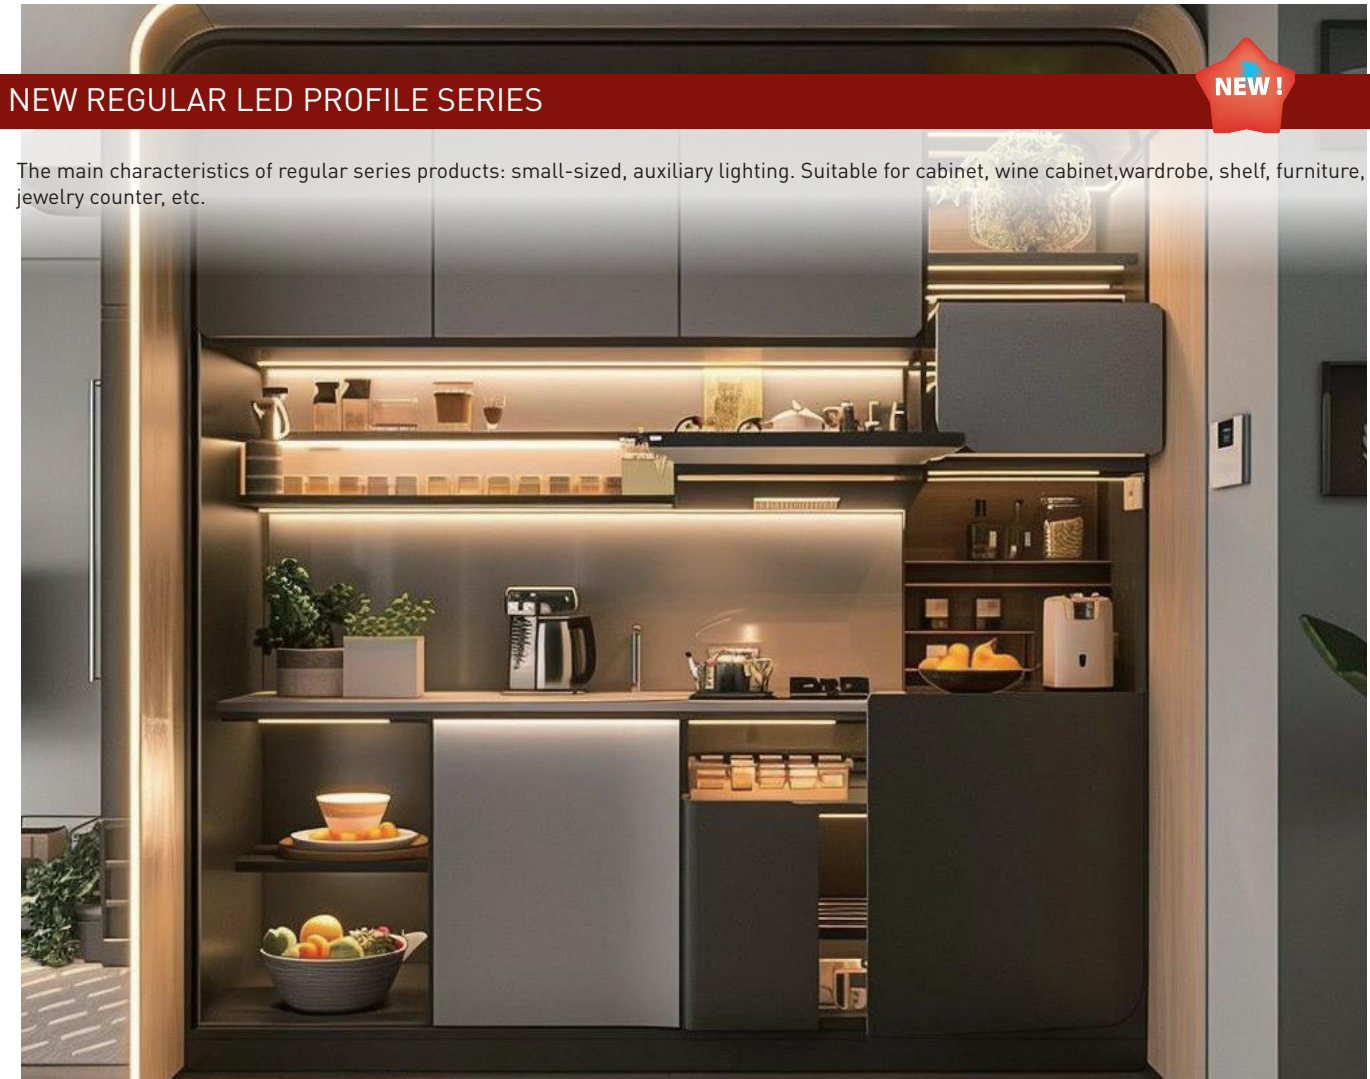


Model: LP1010E NEW !

Triangular Profile



SIZE

Unit:mm

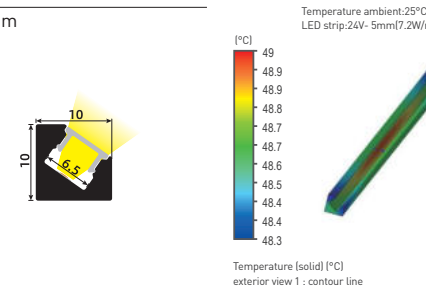


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	7.2W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	6 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted



Accessory

Art-No.	Picture	Description	Material	Color
LP09062		Cover	PC	Transparent
LP09063		Cover	PC	Opal
LP09064		Cover	PC	Diffuser
LP0908		Cover	PC	Black
1010E8		End cap(Hole)	PC	White
1010E9		End cap(W/O hole)	PC	White
1010E0		Clip	Stainless steel	Silver





Art-No	Picture
LSSC241030 COB-24V-320-5mm	
LSSS241027 SMD-24V-120-5mm	

Model: LP2417





Triangular Profile

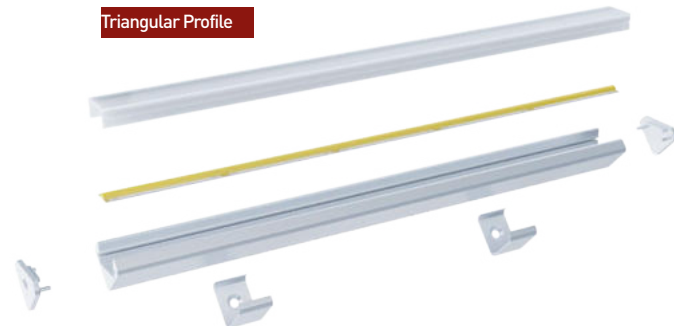

SIZE

Unit:mm




PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting


INSTALLATION

Surface mounted

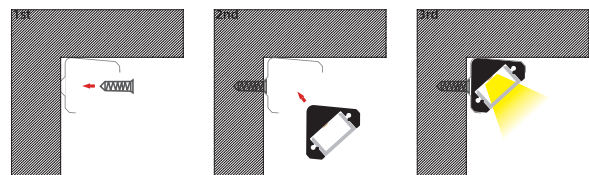

Accessory

Art-No.	Picture	Description	Material	Color
24172		Cover	PC	Transparent
24173		Cover	PC	Opal
24174		Cover	PC	Diffuser
2417B		Cover	PC	Black
24178		End cap(Hole)	PC	White
24179		End cap(W/O hole)	PC	White
24170		Clip	Stainless steel	Silver

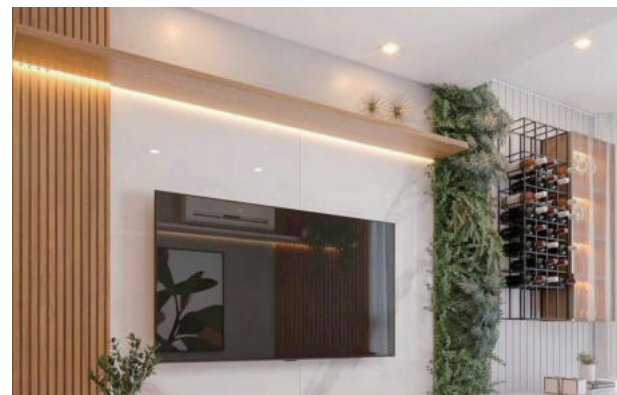


Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

Model: LP1616A





Triangular Profile



SIZE

Unit:mm




PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	15 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted

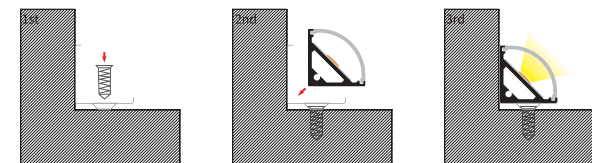



Accessory

Art-No.	Picture	Description	Material	Color
1616A2		Cover	PC	Transparent
1616A3		Cover	PC	Opal
1616A4		Cover	PC	Diffuser
1616AB		Cover	PC	Black
1616A8		End cap(Hole)	PC	White
1616A9		End cap(W/O hole)	PC	White
1616A0		Clip	Stainless steel	Silver




Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

Model: LP1712E

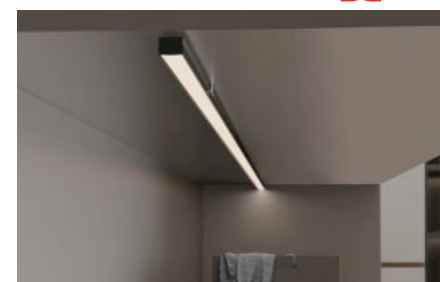

SIZE

Unit:mm

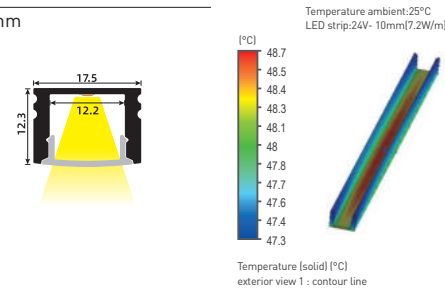


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	7.2W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted

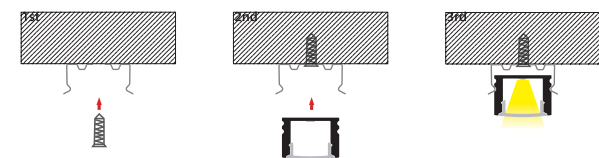


Accessory

Art-No.	Picture	Description	Material	Color
LP17072		Cover	PC	Transparent
LP17073		Cover	PC	Opal
LP17074		Cover	PC	Diffuser
LP1707B		Cover	PC	Black
1712E8		End cap(Hole)	PC	White
1712E9		End cap(W/O hole)	PC	White
17150		Clip	Stainless steel	Silver

Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	




Model: LG1814

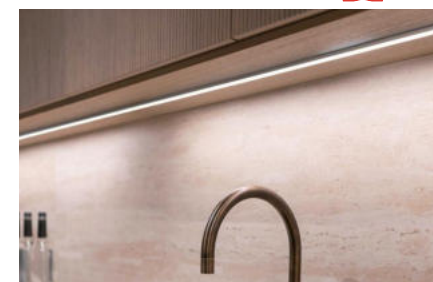

SIZE

Unit:mm

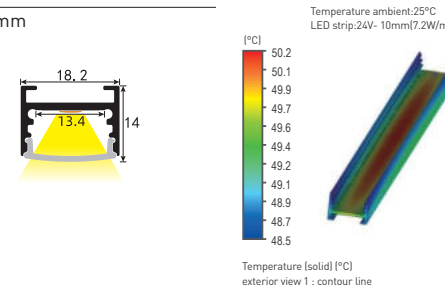


PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	7.2W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	13 mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

Surface mounted

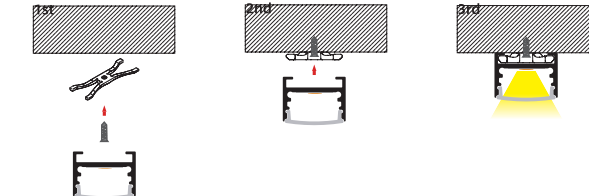

Accessory				
Art-No.	Picture	Description	Material	Color
LP18132		Cover	PC	Transparent
LP18133		Cover	PC	Opal
LP18134		Cover	PC	Diffuser
LP1813B		Cover	PC	Black
18148		End cap(Hole)	PC	White
18149		End cap(W/O hole)	PC	White
18140		Clip	PC	White
ACC-2PIN-10MM-X		Ministrip connector	PC	Transparent
ACC-COB-4PIN-10MM-X		Ministrip connector	PC	Transparent
ACC-SMD-2PIN-10MM-X		Ministrip connector	PC	Transparent
ACC-SMD-3PIN-10MM-X		Ministrip connector	PC	Transparent
ACC-SMD-4PIN-10MM-X		Ministrip connector	PC	Transparent

Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

Model: LO2424





Circular LED profile



SIZE

Unit:mm



PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	14mm(max.)
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

Accessory





Art-No.	Picture	Description	Material	Color
L024242		Cover	PC	Transparent
L024243		Cover	PC	Opal
L024244		Cover	PC	Diffuser
L02424B		Cover	PC	Black
L024248		Inner End cap(Hole)	PC	White
L024249		Inner End cap(W/O hole)	PC	White
L024248-2		Outer End cap (lateral wardrobe support)	PC	White
L02424001		Wardrobe Centre mounting rod	Aluminum	Silver
L02424002		Lamp support	Aluminum	Silver
L02424003		Wall support	Aluminum	Silver
L024240		Adjustable bracket (Support 0-130°)	PC	White
L02424H		Pendant kit	Stainless steel	Silver

Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	







INSTALLATION





1 Wardrobe Centre mounting rod (recommended to be used every 500mm)

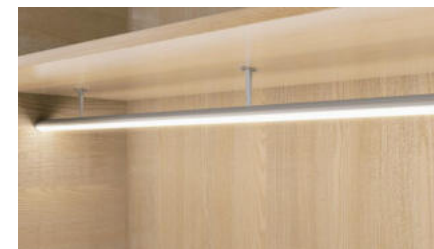



2 Lateral Wardrobe support (Outer End cap)

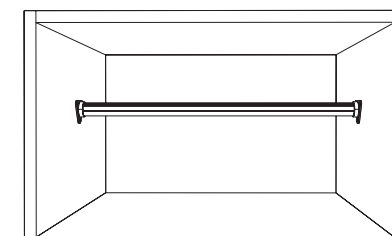




3 Pendant







4 Adjustable bracket(Support 0-130°)




5 Wall Support




6 Art Lighting Lamp Support

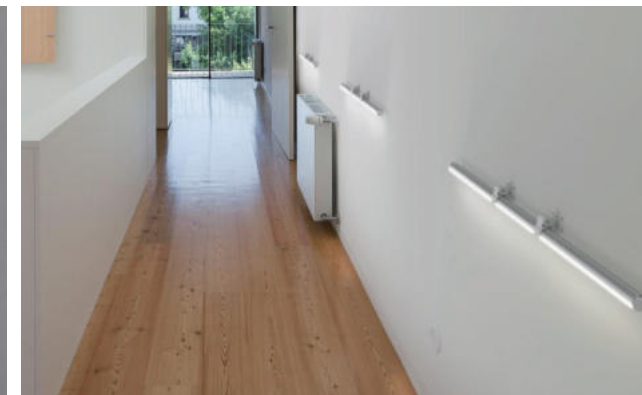

Model: LO2727

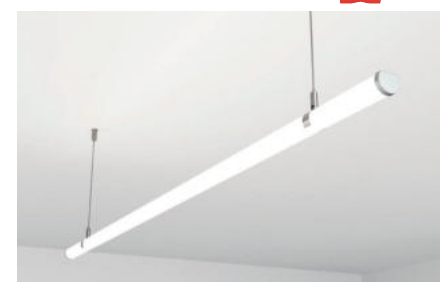


Circular LED profile

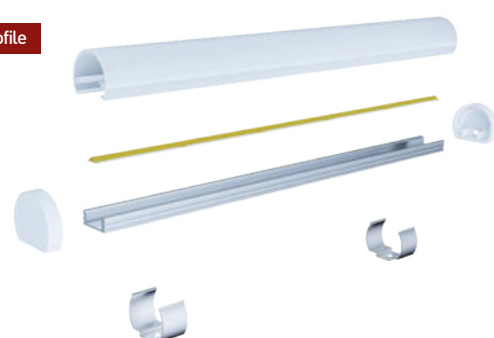

SIZE


Unit:mm

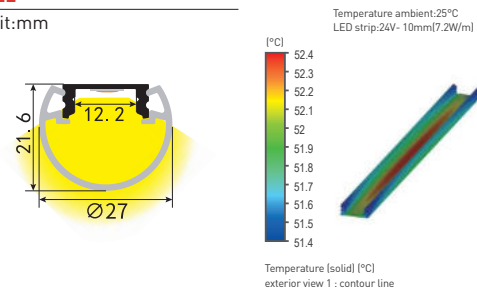

PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	7.2W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	12 mm[max.]
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

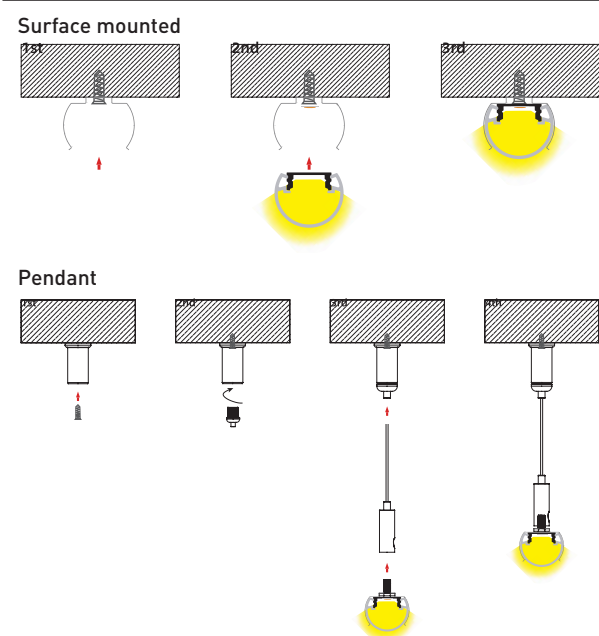

Art-No.	Picture	Description	Material	Color
L027272		Cover	PC	Transparent
L027273		Cover	PC	Opal
L027274		Cover	PC	Diffuser
L02727B		Cover	PC	Black
L027278		End cap(Hole)	PC	White
L027279		End cap(W/O hole)	PC	White
LS5270SDZJ		Pendant kit	Stainless steel	Silver
18140		Clip	Stainless steel	Silver

Art-No	Picture
LSSC241030 COB-24V-320-10mm	
LSSS241027 SMD-24V-120-10mm	

Model: LP3030G




Triangular Profile



SIZE


Unit:mm

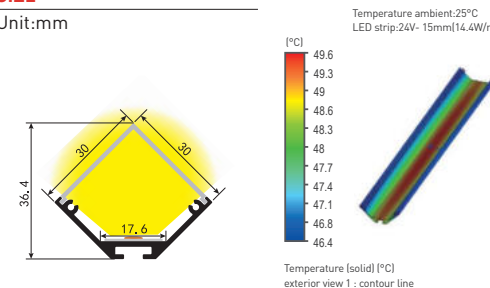

PARAMETERS

Material:	AL6063-T5
Surface:	Anodized/ Painting
PC cover:	Diffuser /Transparent/Opal/Black
Power:	14.4W/m
Input voltage:	12VDC/24VDC
Lamp beads:	320LEDs/m(COB) 120LEDs/m(SMD2835)
Lighting source width:	17 mm[max.]
Available lengths:	0.5-3m
Application:	Furniture lighting/ Indoor lighting

INSTALLATION

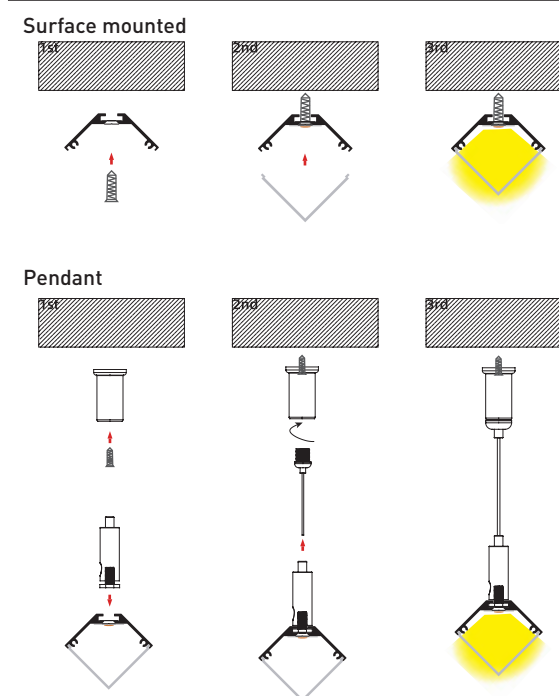

Art-No.	Picture	Description	Material	Color
LP3030B2		Cover	PC	Transparent
LP3030B3		Cover	PC	Opal
LP3030B4		Cover	PC	Diffuser
LP3030BB		Cover	PC	Black
3030G8		End cap(Hole)	PC	White
3030G9		End cap(W/O hole)	PC	White
LS5270SDZJ		Pendant kit	Stainless steel	Silver

Art-No	Picture
LSSS241027 SMD-24V-120-15mm	